



Electrolux

Warewashing Utensil Dishwasher with Drain Pump and Pressure Boiler

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



Warewashing

Utensil Dishwasher with Drain Pump and Pressure Boiler

503023 (WTU40PDP)

Utensil dishwasher with drain
pump and pressure boiler - 65
r/h

Short Form Specification

Item No. _____

Multi-purpose dish/utensil washer. 304 AISI stainless steel front and side panels, wash tank, tank filter and wash and rinse arms. 42 liter wash tank with rounded corners. Double skinned insulated walls and counterbalanced door. 450mm door clearance. 3 washing cycles. Self cleaning cycle. Digital control panel. Built-in pressure boiler with automatic boiler emptying function. Boiler with 304 welding for protection against corrosion. Drain pump. Fault auto-diagnosis system. Rinse aid dispenser. Pre-arranged for external detergent dispenser, HACCP and Energy management device.

Main Features

- Built-in pressure boiler sized to raise incoming 50 °C water to guarantee a minimum rinsing temperature of 82 °C for sanitizing rinse. No external booster is required.
- Double rack support equipped with either a large 550x535mm rack for pizza plates, trays and utensils or a standard 500x500mm rack for plates, cups and cutlery.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Fault auto-diagnosis system.
- Simple service from the front.
- Easy to remove wash/rinse arms and filter.
- Fully automatic self-cleaning cycle avoids the risk of bacteria proliferation.
- Pre-arrangement for HACCP system implementation and Energy Management device.
- Simple control panel, with digital display for wash and rinse temperature.
- Automatic boiler emptying function.
- 55/90/300 seconds cycles.
- Low noise level <65 dBA.

Construction

- Counter-balanced door to minimize impact when opening and closing.
- Unit to feature rinse aid dispenser pump.
- Unit to feature smooth surfaces to facilitate cleaning.
- Wash/rinse arms and nozzles in stainless steel.
- 304 AISI stainless steel front and side panels, wash tank and filter.
- Double skinned construction.
- Finished in top quality materials to ensure durability.
- Completely closed on the back by a cover plate.
- Double wash tank with rounded corners for easier cleaning operations.
- No pipes inside the washing chamber.

Included Accessories

- 1 of Basket for 18 dinner plates - yellow PNC 867002
- 1 of Wire basket for pizza plates, up to 320mm diam. trays, utensils PNC 867045
- 2 of Yellow cutlery container PNC 864242

Optional Accessories

- 12lt external manual water softener PNC 860412 ☐
- 8lt external automatic water softener PNC 860413 ☐

APPROVAL: _____



Electrolux

Warewashing Utensil Dishwasher with Drain Pump and Pressure Boiler

- Basket for 16 vertical glasses (h 70 mm - diam 100 mm) - blue PNC 867023 ☐
- Basket for 12 soup bowls - green PNC 867000 ☐
- Basket for 18 dinner plates - yellow PNC 867002 ☐
- Basket semi-professional 500x500x190mm PNC 867024 ☐
- Cover rack for small and light items (500x500 baskets) PNC 867016 ☐
- Detergent dosing kit PNC 864218 ☐
- Filter for partial demineralization PNC 864017 ☐
- Filter for total demineralization PNC 864367 ☐
- HACCP printer kit PNC 864002 ☐
- Integrated HACCP kit PNC 864001 ☐
- Kit 4 plastic boxes for cutlery - yellow PNC 865574 ☐
- Kit to measure total and partial water hardness PNC 864050 ☐
- Rinse booster pump kit for single tank pressure dishwasher PNC 864051 ☐
- Wire basket (550x535mm) for utensils PNC 867046 ☐
- Wire basket for pizza plates, up to 320mm diam. trays, utensils PNC 867045 ☐
- Yellow cutlery container PNC 864242 ☐



**Warewashing
Utensil Dishwasher with Drain Pump and Pressure Boiler**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2013.03.07




Electrolux

Warewashing Utensil Dishwasher with Drain Pump and Pressure Boiler

Front

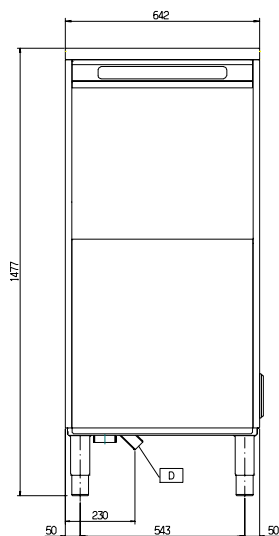


Top



D = Drain
EI = Electrical connection
HWI = Hot water inlet
XD = Detergent connection

Side

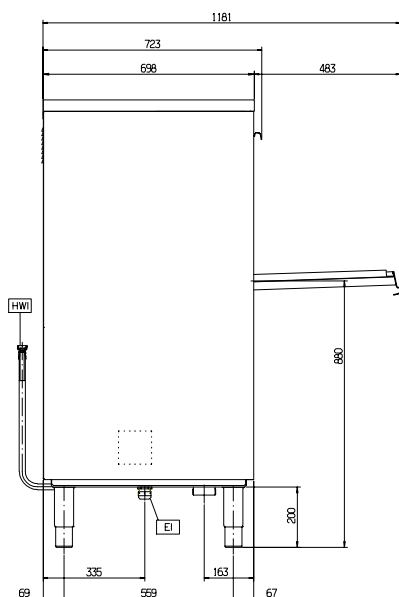

Electric

Supply voltage:
503023(WTU40PDP) 400 V/3N ph/50 Hz
Total Watts: 10.2 kW
Boiler heating elements: 9 kW

Water:

Water supply temperature: 50°C
Water supply hardness (MAX): 7-14°FH (4-8°dH)
Working cycles time (sec.): 55/90/300
Boiler Capacity (lt): 12
Washing cycle temperature: 55-65 °C
Washing cycle tank capacity (lt): 42
Washing cycle pump power: 0.8 kW
Washing cycle electrical elements: 3 kW
Hot rinse cycle duration (sec.): 16
Hot rinse cycle temperature: 80-90 °C
Hot rinse cycle water consumption (lt): 3.8

Key Information:

External dimensions, Height: 1477 mm
External dimensions, Width: 642 mm
External dimensions, Depth: 723 mm
Net weight: 88 kg
Shipping weight: 104 kg
Shipping height: 1700 mm
Shipping width: 820 mm
Shipping depth: 770 mm
Shipping volume: 1.07 m³
Dishes capacity: 1170/hr
Basket capacity: 65/h
Cell dimensions - width: 554 mm
Cell dimensions - depth: 570 mm
Cell dimensions - height: 450 mm



Warewashing
Utensil Dishwasher with Drain Pump and Pressure Boiler

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2013.03.07