## Electrolux air-o-convect

# Convection LW 10 GN 1/1-gas

Electrolux air-o-convect blends tradition with the latest technological research in order to satisfy the creativity and working requirements of today's professional kitchen. The air-o-convect range offers a choice of different models, providing a high degree of automation and an extensive range of accessories. The air-o-convect convection ovens with direct steam are designed to form complete cook&chill systems together with air-o-chill blast chillers/freezers, therefore, any installation can be tailored to meet the needs of the caterer. The air-o-convect ovens detailed are 10 GN 1/1 gas models.



#### 269702

#### **OPERATING MODES**

- Convection cycle (max. 300 °C) with automatic moistener (11 settings): 0 no additional moisture (browning and gratinating); 1-2 low moisture (stewed vegetables); 3-4 medium-low moisture (au gratin vegetables, roasted meat and fish); 5-6 medium moisture (all small portions of meat and fish); 7-8 medium-high moisture (large pieces of red meat); 9-10 high moisture (large pieces of white meat, baking and pre-cooked food regeneration).
- air-o-convect ovens can cook by controlling either the cooking time or the product's core temperature through a single-sensor probe.
- Fan speeds: full and PULSE (pulse ventilation for baking and low temperature cooking). The " PULSE function" is also perfect for keeping food warm at the end of the cooking cycle and for low temperature cooking of large pieces of meat.
- Exhaust valve electronically controlled to extract excess humidity.
- air-o-clean: 4 different pre-set cycles to clean the cooking cell, according to the actual requirements. The cleaning system is built-in (no need for add-ons). Semi-automatic cleaning cycle also available.
- · Quick cooling: useful when passing to a type of cooking that requires a lower temperature than the previous one. It works automatically and manually.
- Manual injection of water in the

#### **PERFORMANCE**

- air-o-flow: blows fresh air from outside through the bi-functional fan, which pulls the air in from the backside of the oven after it is pre-heated, thus guaranteeing an even cooking process.
- Single-sensor food probe.
- NXT cell gas burner: GASTEC certification on high efficiency and low emissions. High efficiency cell heat exchanger.







#### Electrolux air-o-convect Convection LW 10 GN 1/1-gas

### CONSTRUCTION

- Stainless steel 304 throughout, with seamless joints in the cooking cell.
- Double thermo-glazed door equipped with drip pans to catch condensate and prevent slippery floor for maximum security and four holding positions allowing easier loading and unloading.
- Halogen lighting in the cooking cell.
- Access to main components from the front panel.
- IPX5 water protection.
- air-o-convect ovens meet GASTEC safety requirements.

	AOS101GCG2 269702	AOS101GCD2 269712
TECHNICAL DATA		
Power supply	Gas	Gas
Gas	Natural Gas	LPG
Number of grids	10	10
Runners pitch - mm	65	65
Cooking cycles - °C		
air-convection	300	300
Convection	•	•
Meat probe	•	•
Automatic cleaning system	•	•
External dimensions - mm		
width	898	898
depth	915	915
height	1058	1058
Internal dimensions - mm		
width	460	460
depth	715	715
height	736	736
Power - kW		
auxiliary	0.3	0.3
cooking chamber	20	20
electric	0.3	0.3
gas	20	20
auxiliary	0.3	0.3
Net weight - kg.	147	147
Supply voltage	230 V, 1N, 50/60	230 V, 1N, 50/60

**ACCESSORIES** 

1 GRID GN1/1 FOR 8 WHOLE CHICKENS(1.2KG)

1 GRID GN1/2 FOR 4 WHOLE CHICKENS(1.2KG)

2 GRIDS GN 1/1 FOR CHICKENS (8 PER GRID)

AUTOMATIC WATER SOFTENER FOR OVENS

WHEEL KIT FOR BASE OF 6&10X1/1 & 2/1 LW


BAKING TRAY(400X600X20)4 EDGES-ALUMINIUM

**BAKING TRAY FOR BAGUETTE GN 1/1** 

2 FRYING BASKETS FOR OVENS

AOS101GCD2

AOS101GCG2

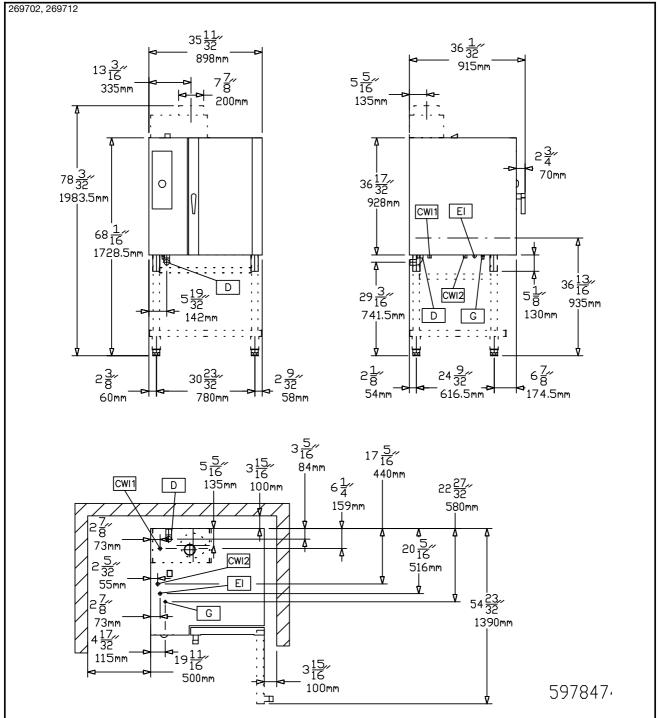

	AOS101GCG2 269702	AOS101GCD2 269712
LEGEND		
CWI - Cold water inlet	3/4"	3/4"
D - Water drain	1"1/4	1"1/4
El - Electrical connection	230 V, 1N, 50/60	230 V, 1N, 50/60
G - Gas connection	1/2"	1/2"
WIC - Cooling water inlet	3/4"	3/4"