



Electrolux

air-o-chill Blast Chiller Crosswise - 28 kg Remote

ITEM #

MODEL #

NAME #

SIS #

AIA #



Electrolux



air-o-chill

Blast Chiller Crosswise - 28 kg Remote

726623 (RBC101R)

Blast Chiller - 28 kg Remote
230 V/1p/50Hz

Short Form Specification

Item No.

For 10 GN1/1 or 600x400 mm trays. Load capacity: chilling 28 kg; (UK guidelines). External and internal top, front and side panels in 304 AISI stainless steel. Internal rounded corners and drain. Right hinged, reversible full door. Remote refrigeration unit. Electronic control, 3 standard and 6 programmable cycles. Automatic detection of food probe insertion. Automatic and Manual defrost. Blast chilling real residual time estimation (A.R.T.E.). Turbo cooling function. Specific cycles for ice cream. Evaporator with antirust protection. Digital temperature and time display. HACCP and Service alarms with data logging. Operating air temperature: +90 -12° C. For ambient temperatures up to 32°C. Cyclopentane insulation (HCFC, CFC and HFC free). R134a refrigerant gas (HCFC and CFC free).

Main Features

- Load capacity: 28 kg in chilling.
- Will chill product from 90 °C to 3 °C or below in less than 90 minutes.
- Easy-to-use, electronic control panel. Fully programmable.
- Time or (automatic) core temperature controlled operation.
- Soft chill and Hard Chill.
- Auto hold at temperature reached at end of blast chilling cycle.
- Turbo cooling: non-stop mode (working temperature: from 3 °C to -36 °C).
- Pre-programmed ice cream hardening cycles.
- Standard equipped with one core temperature probe, can be ordered either with up to three core temperature probes or with one 3-sensor probe.
- Automatic Intelligent and manual defrost modes.
- Display: large LED for temperature and time/core temperature read out.
- Audible alarms and visual indicators for food safety (HACCP) issues and separate audible and visual for unit malfunctions.
- During cycle, temperature and time is monitored.
- On-board HACCP monitoring capable.
- R134 A gas in refrigeration circuit.

Construction

- Magnetic, easy-to-remove heated gaskets.
- Standard equipped with 15 cm, adjustable legs, castors available as option.
- 304 AISI stainless steel construction throughout.
- Seamless hygienic inner cell with all rounded corners for easy cleaning.
- Swing hinged front panel for easy service access to main components.
- Requires remote refrigeration connection.

Included Accessories

- 1 of 1 extra single-sensor probe for blast chiller and blast chiller&freezers PNC 880213

Optional Accessories

- Kit for HACCP advanced connection for LW PNC 880183 ☐ and CW blast chiller&freezer
- Plastic coated grid 1/1GN PNC 881061 ☐
- Printer for HACCP basic version (for cabinets and counters with electronic control) PNC 881532 ☐


APPROVAL:




Electrolux

air-o-chill Blast Chiller Crosswise - 28 kg Remote

Front

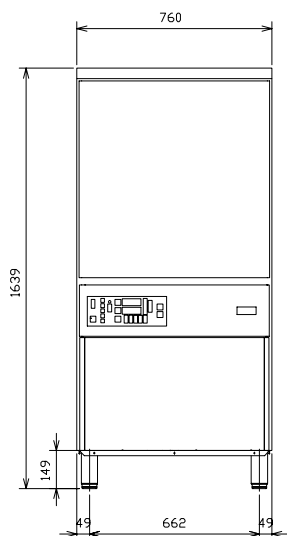


Top

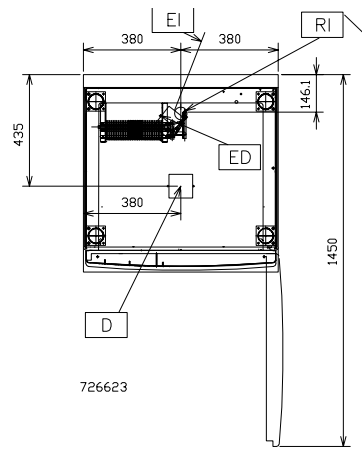

- D** = Drain
ED = Remote electrical connection
EI = Electrical connection
RO = Remote unit connection

Side

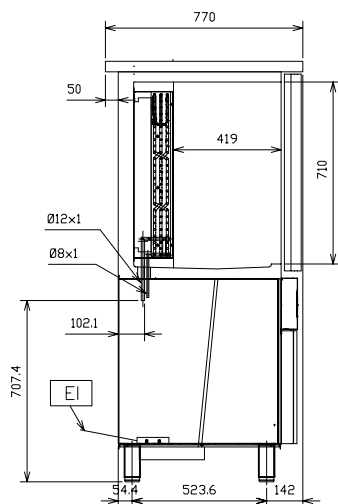

Electric

Supply voltage:
 726623(RBC10.1-2) 230 V/1N ph/50 Hz
Connected load: 0.12 kW
Circuit breaker required

Installation:

Clearance: 5 cm on sides and back.
 Please see and follow detailed installation instructions provided with the unit

Capacity:

Max load capacity: 28 kg

Key Information:

Net weight: 114 kg
Shipping weight: 134 kg
Shipping height: 1640 mm
Shipping width: 760 mm
Shipping depth: 770 mm
Shipping volume: 0.95 m³

Refrigeration Data

Refrigerant type: R134a



air-o-chill
 Blast Chiller Crosswise - 28 kg Remote

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2012.08.28