



**Electrolux**

## air-o-chill Blast Chiller-Freezer Crosswise -15 kg

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**Electrolux**



**air-o-chill**

### Blast Chiller-Freezer Crosswise -15 kg

726627 (RBF061)

Blast Chiller-Freezer  
Crosswise -15 kg 230  
V/1p/50Hz

727131 (RBF0616)

Blast Chiller-Freezer  
Crosswise -15 kg 220  
V/1p/60Hz

### Short Form Specification

#### Item No.

For 6 GN1/1 or 600x400 mm trays. Load capacity: chilling 19,5 kg; freezing 15,2 kg (UK guidelines). External and internal top, front and side panels in 304 AISI stainless steel. Internal rounded corners and drain. Right hinged, reversible full door. Built-in refrigeration unit. Electronic control, 5 standard and 10 programmable cycles. Automatic detection of food probe insertion. Automatic and Manual defrost. Blast chilling real residual time estimation (A.R.T.E.). Turbo cooling function. Specific cycles for ice cream. Evaporator with antirust protection. Digital temperature and time display. HACCP and Service alarms with data logging. Operating air temperature: +90 -41°C. For ambient temperatures up to 32°C. Cyclopentane insulation (HCFC, CFC and HFC free). R404a refrigerant gas (HCFC and CFC free).

### Main Features

- Load capacity: 19.5 kg in chilling; 15 kg in freezing.
- Will chill product from 90 °C to 3 °C or below in less than 90 minutes.
- Will freeze product from 90 °C to -18 °C or below in less than 240 minutes.
- Easy-to-use, electronic control panel. Fully programmable.
- Time or (automatic) core temperature controlled operation.
- Soft chill, Hard Chill and Blast Freeze modes.
- Auto hold at temperature reached at end of blast chilling or freezing cycle.
- Turbo cooling: non-stop mode (working temperature: from 3 °C to -36 °C).
- Pre-programmed ice cream hardening cycles.
- Standard equipped with one 3-sensor temperature probe.
- Automatic Intelligent and manual defrost modes.
- Display: large LED for temperature and time/core temperature read out.
- Audible alarms and visual indicators for food safety (HACCP) issues and separate audible and visual for unit malfunctions.
- During cycle, temperature and time is monitored.
- On-board HACCP monitoring capable.
- R404 A gas in refrigeration circuit.

### Construction

- Magnetic, easy-to-remove heated gaskets.
- Standard equipped with 15 cm, adjustable legs, castors available as option.
- 304 AISI stainless steel construction throughout.
- Seamless hygienic inner cell with all rounded corners for easy cleaning.
- Swing hinged front panel for easy service access to main components.
- Self contained 1 hp compressor.

APPROVAL: \_\_\_\_\_



Electrolux

**air-o-chill**  
**Blast Chiller-Freezer**  
**Crosswise -15 kg**

**Included Accessories**

- 1 of 1 extra single-sensor probe for blast chiller and blast chiller&freezers PNC 880213

**Optional Accessories**

- Kit for HACCP advanced connection for LW and CW blast chiller&freezer PNC 880183 ☐
- 3-sensor probe for blast chiller/freezers PNC 880212 ☐
- 1 extra single-sensor probe for blast chiller and blast chiller&freezers PNC 880213 ☐
- Plastic coated grid 600x400mm PNC 880864 ☐
- Plastic coated grid 1/1GN PNC 881061 ☐
- 4 wheels for blast chillers and 400lt refrigerator PNC 881097 ☐
- Cook and Chill kit for stacking 6x1/1GN convection oven and 15kg blast chiller and blast chiller&freezer PNC 881528 ☐
- Printer for HACCP basic version (for cabinets and counters with electronic control) PNC 881532 ☐
- Pair of 1/1GN AISI 304 stainless steel grids PNC 921101 ☐



**air-o-chill**  
**Blast Chiller-Freezer Crosswise -15 kg**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2012.09.24




Electrolux

# air-o-chill Blast Chiller-Freezer Crosswise -15 kg

**Front**

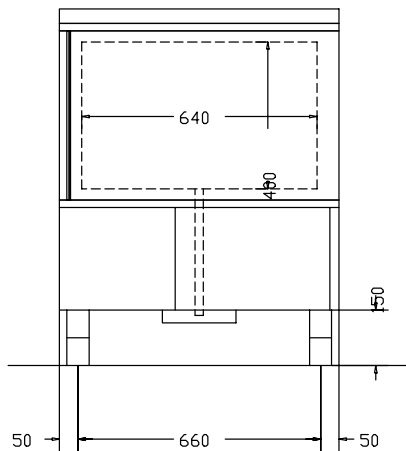


**Top**



- ED** = Remote electrical connection  
**EI** = Electrical connection  
**RO** = Remote unit connection

**Side**

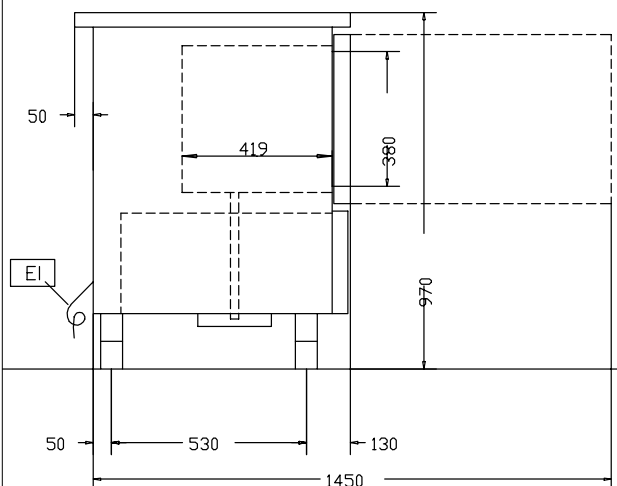

## Electric

### Supply voltage:

726627(RBF061)

230 V/1N ph/50 Hz

727131(RBF0616)

220 V/1N ph/60 Hz

### Connected load:

1.51 kW

### Circuit breaker required

## Installation:

### Clearance:

5 cm on sides and back.

Please see and follow detailed installation instructions provided with the unit

## Capacity:

### GN:

6 - 1/1 containers

### Max load capacity:

15 kg

## Key Information:

### Net weight:

726627(RBF061)

105 kg

727131(RBF0616)

125 kg

### Shipping weight:

115 kg

### Shipping height:

970 mm

### Shipping width:

760 mm

### Shipping depth:

760 mm

### Shipping volume:

0.56 m<sup>3</sup>

## Refrigeration Data

### Refrigerant type:

R404a



air-o-chill  
Blast Chiller-Freezer Crosswise -15 kg

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2012.09.24