

Electrolux Blast Freezers

Blast Chiller/ Freezers - 28 kg

Chilling means bringing the temperature of cooked food from +90°C to +3°C in a short time lap which does not allow bacterial growth. Electrolux Blast Chillers/Freezers reduce temperature from +90°C to +3°C at food core in less than 90 minutes and down to -18°C in less than four hours: the model detailed on this sheet performs this cycle up to a 28 kg full load. After the Blast Chilling/freezing process a holding cycle starts automatically to maintain food at -18 °C. Blast chilled food has a solid 5 days shelf life without loss of flavour, nutritional values and weight. The opportunity to prepare in a single shot the food to be used in different times during the week enables a better work scheduling and therefore a sensible reduction in labour costs. The range of Electrolux Blast Chillers/freezers consists of models with built in or remote refrigerating unit that offer an excellent all-round performance.



Model

OPERATING MODES

- Soft Chilling (Air temperature -2°C).
- Hard Chilling (Air temperature -20°C).
- All the probe-driven cycles feature ARTE (Algorithm for Remaining Time Estimation) to make planning the activities easier.
- Holding at +3°C (automatically activated at the end of each cycle).
- Turbo cooling: the chiller works continuously at the desired temperature. Ideal for continuous production.
- Automatic recognition of the insertion of the food probe (cycles piloted either by food probe temperature or by time).

- The control unit provides several operating settings: time/core temperature according to NF and UK regulations, time/air temperature/probe personalised according to national regulations, sterilizing cycle: UV lamps built-in (on request), 3 single sensor or 3-sensor temperature probes (as accessory), ideal for meats, automatic defrosting and manual defrosting. All parameters are programmable.
- Single sensor core probe as standard.
- The control unit provides two large displays to read out: time, core temperature, cycle countdown, alarms, service information.
- Two customizable cycles (P1 & P2) for each operating mode, allowing to set the time and air temperature. These programs can be converted into ice-cream specialized cycles (shape maintenance and holding).

- All information related to the different operating models are recorded: date, time, cycle, core temperature, holding temperature, HACCP accordance.
- An audible alarm starts when the cycle ends or terminates abnormally.

PERFORMANCE

- Chilling times can vary according to food quantity, density, moisture contents and type of containers. Chilling capacity according to NF* regulations is 18 kg.



Electrolux

Electrolux Blast Freezers
Blast Chiller/ Freezers - 28 kg

CONSTRUCTION

- Internal and external finishing in 304 AISI stainless steel and backpanel in galvanized steel.
- High density polyurethane insulation, 60 mm thickness, HCFC free.
- Environmentally friendly: R404a as refrigerant fluid.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Inner cell with fully rounded corners.
- Door equipped with removable magnetic gasket with hygienic design.
- Motors and fan waterproof protected IP21.
- Evaporator with antirust protection.

- Ventilator (fan) swinging hinged panel for access to the evaporator for cleaning.
- Automatic heated door frame.
- Thermostatic expansion valve to optimize the cooling unit efficiency.
- Adjustable feet 150 mm high.
- Stand alone printer as accessory.
- PC connection on request, gate RS 485.

INSTALLATION

- No water connections required.
- Waste water can be plumbed into drain, but can also be collected in an optional waste container.

*NF HYGIENE ALIMENTAIRE
certifying authority : AFAQ AFNOR
CERTIFICATION. Address:11, Avenue
Francis de Pressense - 93571
Saint-Denis La Plaine Cedex - France.
Conformity with regulation NF031.
Certified guarantees: fitness for
cleaning, thermal performance.

	RBF101 726629	RBF1016 727132
TECHNICAL DATA		
Type	H - FREEZERS - 28 KG	H - FREEZERS - 28 KG
Productivity per cycle - kg.		
NF Regulations - chilling / freezing	21.6, 21.6	
UK Guide lines - chilling / freezing	32, 28	
Gross capacity (D.I.N. 8952) - l.	210	210
Cooling unit	Built-In	Built-In
External dimensions - mm		
width	760	760
depth/with open doors	760, 1500	760, 1500
height	1640	1640
Door hinges	Right Side	Right Side
Trays type	GN 1/1; 600x400	GN 1/1; 600x400
Max load capacity - trays h 65 mm - n°	6	6
Compressor power - HP		2.5
Refrigerant type	R404a	R404a
Refrigerant quantity - g.	1200	1800
Refrigeration power - W	1464	2440
Refrigerant power		
at evaporation temperature - °C	-30	-25
Power - kW		
installed-electric	1.59	2.86
Net weight - kg.	140	140
Power supply - V, phases, Hz	400 V, 3N, 50	230 V, 3N, 60
INCLUDED ACCESSORIES		
1 SINGLE-SENSOR PROBE-BL.C/FREEZERS LW	1	1
ACCESSORIES		
3-POINT-SENSOR PROBE-BL.C/FREEZERS LW	880212	880212
4 WHEELS FOR BLAST CHILLERS	881097	881097
60 MM PITCH SIDE HANGERS 10X1/1 ELE.OVEN	922121	922121
60 MM PITCH SIDE HANGERS 10X1/1 GAS OVEN	922122	922122
80 MM PITCH SIDE HANGERS 10X1/1 ELE.OVEN	922115	922115
80 MM PITCH SIDE HANGERS 10X1/1 GAS OVEN	922116	922116
KIT HACCP ADVANCED CONNECT. BC/BCF LW+CW	880183	880183
KIT TO CONVERT TO 10X1/1 SLIDE-IN RACK	922201	922201
PAIR OF 1/1 GN AISI 304 S/S GRIDS	921101	921101
PLASTIC COATED GRID-600X400 MM	880864	880864
PRINTER HACCP BASIC VERS-REF.ELECR.CONTR	881532	881532
RILSAN COATED GRID	881061	881061
ROLL-IN RACK SUPPORT BC+BCF 28KG 10GN1/1	881518	881518
TROLLEY FOR 10X1/1 & 2/1 ROLL IN RACK	922128	922128
TROLLEY FOR 10XGN1/1 ROLL IN RACK	922130	922130


HDBA020

2011-06-10

Subject to change without notice

Electrolux Blast Freezers
 Blast Chiller/ Freezers - 28 kg

726629, 727132

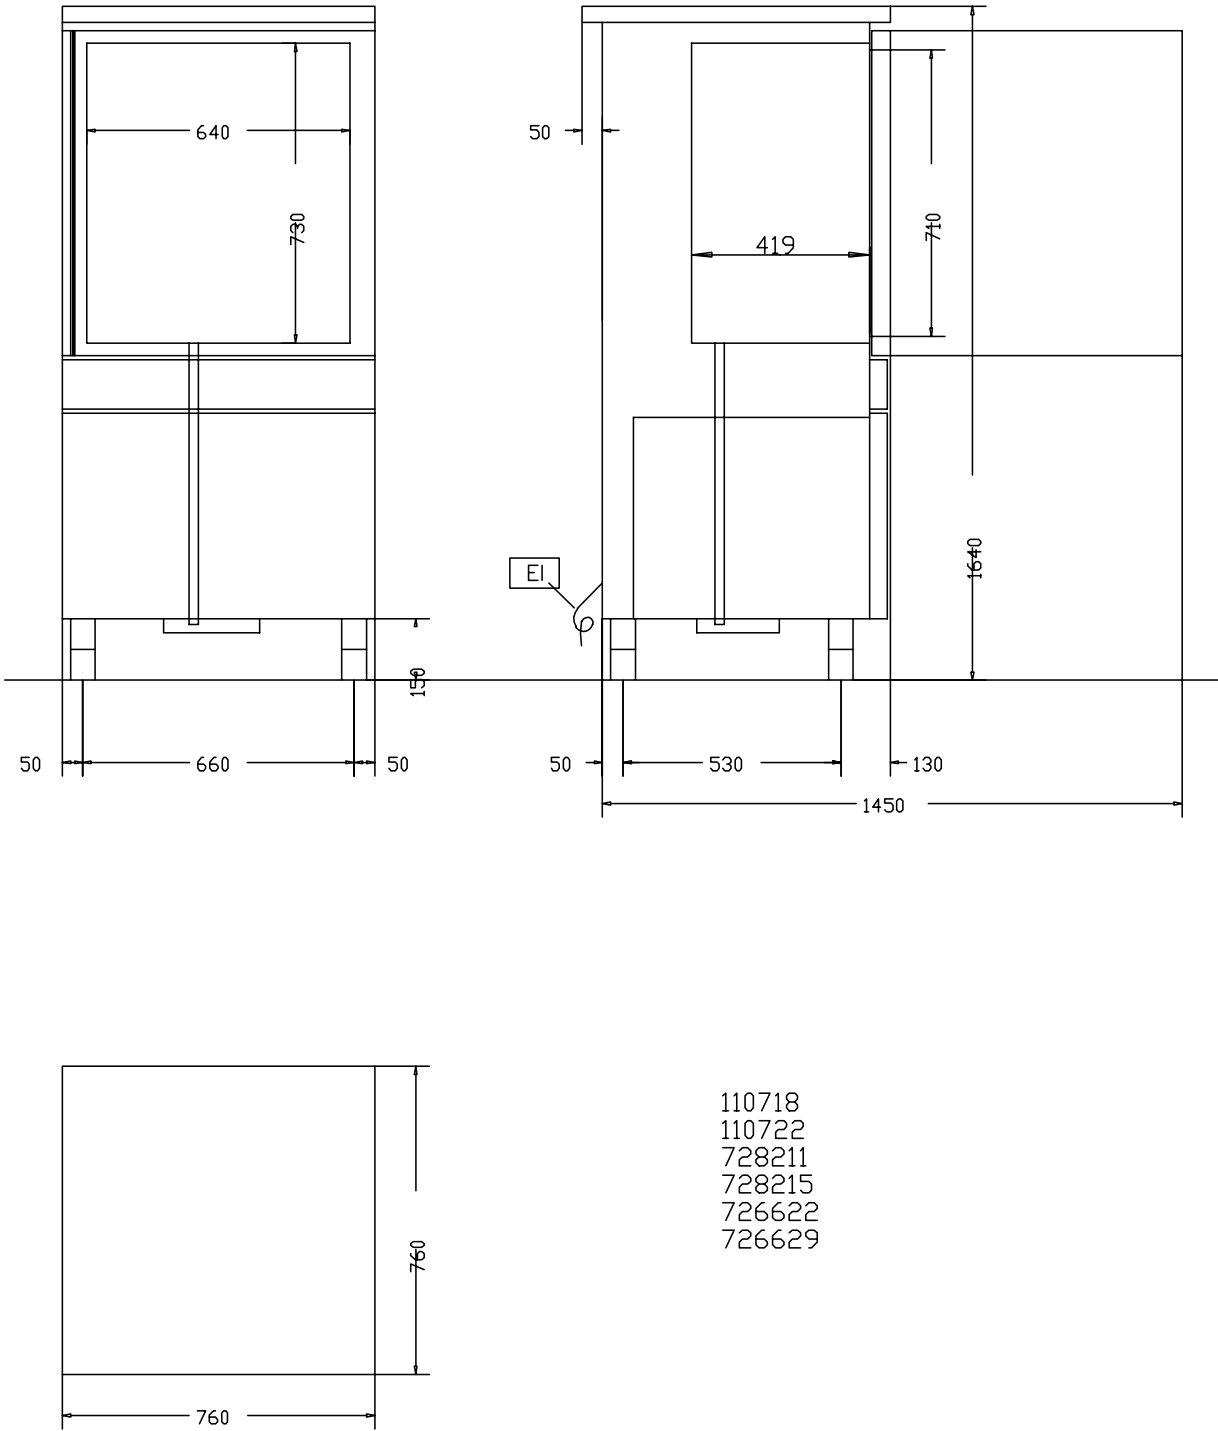

110718
 110722
 728211
 728215
 726622
 726629

LEGEND	RBF101 726629	RBF1016 727132
	400 V, 3N, 50	230 V, 3N, 60