



**Electrolux**

## ecostore 4 Half Door Digital Freezer, 1430lt (-22/ -15)

ITEM #

MODEL #

NAME #

SIS #

AIA #



**Electrolux**



ecostore

4 Half Door Digital Freezer, 1430lt  
(-22/ -15)

**727288 (REX144HF)**

Eco Store Freezer - 1430 lt 4  
Half Doors (-22/-15)- 230  
V/1N/50Hz

### Short Form Specification

#### Item No.

Four half door freezer with internal and external structure in 304 AISI stainless steel; external back panel in galvanized steel and bottom panel in anti-corrosive material. Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms. Optimized back to front forced air flow provides even temperature distribution and fast cooling in any conditions. Fitted with 75 mm-thick cyclopentane insulating foam. Door features lock and door microswitch to switch off the fan when the door is opened. Hidden evaporator to guarantee higher storage capacity and less corrosion problems. Built-in refrigeration unit; ventilated operation; automatic defrost and evaporation of defrost water. For ambient temperatures up to 43 °C. CFC and HCFC free. R404a gas in refrigeration circuit.

Supplied with n. 3x2/1GN Rilsan coated grids and n. 3 sets of 2 stainless steel grid runners. Certified as Class 6 by CECED Italia energy classification. Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

### Main Features

- Digital control with cabinet temperature display and setting and manual activation of defrost cycle. Fully compliant HACCP digital controls include visible alarms.
- Large storage area suitable to contain 2/1 GN grids or shelves on anti-tilt runners.
- Optimized back to front forced air flow provide even temperature distribution and fast cooling in any conditions.
- Automatic defrost.
- Internal structure with numerous charging positions available to host grids, ensuring higher net capacity and a greater storage space.
- Adjustable temperature range from -15 °C to -22 °C to suit meat, fish and dairy storage requirements.
- Performance guaranteed at ambient temperatures of 43 °C.
- Cabinet fitted with up to 75 mm thickness of cyclopentane insulation for best insulating performance with 100% environmental protection.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption.
- Automatic evaporation of the defrosting water by hot gas on the top for energy saving.
- 60 mm-thick insulation covering the evaporator can be easily removed with a single operation.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.
- Rilsan coated grids for improved protection.
- Hidden evaporator thus guaranteeing higher storage capacity and less corrosion problems.
- Cabinets certified as class 6 by the CECED Italia energy classification board. CECED Italia studies demonstrate that the potential annual savings estimated by replacing a cabinet in class 1 with a cabinet in class 6 of equivalent volume, is equal to 580 € for each freezer replaced (considering an energy cost of 0,17 €/kWh and an average net volume of 600lt). See more at: [www.ceceditalia.it](http://www.ceceditalia.it)

### Construction

- Constructed from the highest quality AISI 304 Stainless steel.
- Interior base with corners, pressed from a single sheet.
- Stainless steel runners and supports easily disassembled.
- Anti-corrosion bottom avoids any damage that may be caused to the cabinet by aggressive detergents employed to clean the floors.
- Easy access to the main components for an easy maintenance.
- Lockable door.
- Refrigerant type: R404a.
- Door switch stops the fan when door is opened to avoid cold air exiting the cell, thus saving energy.
- CFC and HCFC-free insulation.
- Doors are self-closing and can be fully opened up to 180°.
- Mounted on adjustable Stainless steel feet, with castors as an option.
- The rounded internal corners, the easily removable runners and grids allow for ease of cleaning and high hygiene standards.

APPROVAL:



**Electrolux**

ecostore  
4 Half Door Digital Freezer,  
1430lt (-22/ -15)

### Included Accessories

- 6 of 2/1GN grey rilsan grid with 2 runners PNC 881020

### Optional Accessories

- 2/1GN grey rilsan grid PNC 881004 ☐
- 2/1GN aisi 304 stainless steel grid PNC 881016 ☐
- 2/1GN 304 AISI stainless steel grid with 2 runners PNC 881018 ☐



ecostore  
4 Half Door Digital Freezer, 1430lt (-22/ -15)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.


2012.09.28




**Electrolux**

# ecostore 4 Half Door Digital Freezer, 1430lt (-22/ -15)

Front

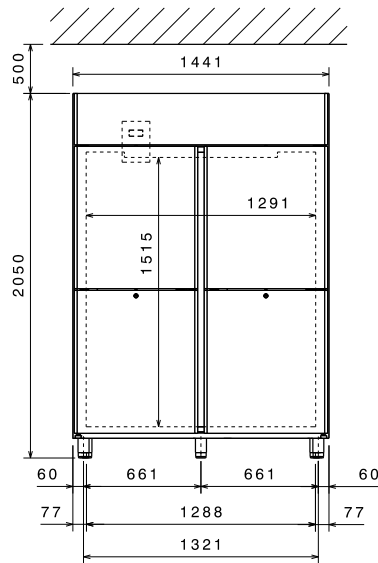


Top



**EI** = Electrical connection

Side

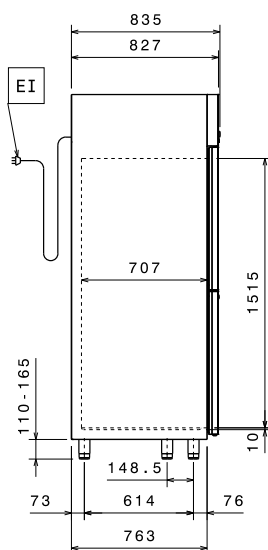

## Electric

### Supply voltage:

**727288(REX144HF)** 230 V/1 ph/50 Hz

### Connected load:

0.84 kW

## Key Information:

<b>Door hinges:</b>	2 Left+2 Right
<b>External dimensions, Height:</b>	2050 mm
<b>External dimensions, Width:</b>	1441 mm
<b>External dimensions, Depth:</b>	837 mm
<b>External dimensions, Depth with Doors Open:</b>	1430 mm
<b>Number and type of doors:</b>	4x1/2 Full
<b>Gross capacity:</b>	1430 lt
<b>Number and type of grids (included):</b>	6 - GN 2/1
<b>Type of external material:</b>	304 AISI
<b>Type of internal material:</b>	304 AISI
<b>Internal panels material:</b>	304 AISI
<b>Number of positions &amp; pitch:</b>	44; 30 mm
<b>CECED Energy Classification:</b>	Class 6

## Refrigeration Data

<b>Control type:</b>	Digital
<b>Refrigerant type:</b>	R404a
<b>Refrigeration power:</b>	751 W
<b>Refrigeration power at evaporation temperature:</b>	-30 °C
<b>Refrigerant weight:</b>	290 g
<b>Operating temperature min.:</b>	-22 °C
<b>Operating temperature max.:</b>	-15 °C
<b>Operating mode:</b>	Ventilated



**ecostore**  
**4 Half Door Digital Freezer, 1430lt (-22/ -15)**

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2012.09.28