

# Electrolux benefit counters

## Freezers

Electrolux Professional has designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space while offering functional and modular solutions to kitchen requirements. The range presented here consists of models with a temperature range of  $-15^{\circ}$  to  $-20^{\circ}\text{C}$  and available either with doors or a combination of doors and drawers.



728518

- Built-in compressor.
- Suitable for use in ambient temperatures of up to  $38^{\circ}\text{C}$ .
- Internal and external doors, front and side panels and removable worktop (50 mm thick) in 304 AISI stainless steel.
- External back panel in galvanized steel.
- Rounded internal corners for ease of cleaning.
- Mounted on stainless steel legs with a plastic interior to give 150 mm clearance for ease of cleaning the floor.

- Adjustable temperature range from  $-15^{\circ}\text{C}$  to  $-20^{\circ}\text{C}$  to suit all storage requirements.
- Anti-tilt runners accept GN1/1 trays and grids.
- Digital control with temperature display.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Access to all components from the front panel.

- In compliance with CE requirements.
- CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).
- 50 mm insulation thickness for energy saving.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.



**Electrolux**

**Electrolux benefit counters  
Freezers**

|                                          | <b>RCSF2M2<br/>728512</b> | <b>RCSF3M3<br/>728517</b> | <b>RCSF2M12<br/>728518</b> | <b>RCSF3M22<br/>728519</b> | <b>RCSF2M24<br/>727009</b> | <b>RCSF3M34<br/>727010</b> |
|------------------------------------------|---------------------------|---------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
| <b>TECHNICAL DATA</b>                    |                           |                           |                            |                            |                            |                            |
| Operating temperature - min/max °C       | -20/-15                   | -20/-15                   | -20/-15                    | -20/-15                    | -20/-15                    | -20/-15                    |
| Operating mode                           | Ventilated                | Ventilated                | Ventilated                 | Ventilated                 | Ventilated                 | Ventilated                 |
| Type of stainless steel                  |                           |                           |                            |                            |                            |                            |
| external                                 | 304 AISI                  | 304 AISI                  | 304 AISI                   | 304 AISI                   | Stainless Steel            | Stainless Steel            |
| internal                                 | 304 AISI                  | 304 AISI                  | 304 AISI                   | 304 AISI                   | Stainless Steel            | Stainless Steel            |
| Gross capacity (D.I.N. 8952) - l.        | 265                       | 415                       | 265                        | 415                        | 265                        | 415                        |
| External dimensions - mm                 |                           |                           |                            |                            |                            |                            |
| width                                    | 1238                      | 1718                      | 1238                       | 1718                       | 1238                       | 1718                       |
| depth/with open doors                    | 700, 1102                 | 700, 1102                 | 700, 1102                  | 700, 1102                  | 700, 1102                  | 700, 1102                  |
| height                                   | 850                       | 850                       | 850                        | 850                        | 850                        | 850                        |
| Internal dimensions - mm                 |                           |                           |                            |                            |                            |                            |
| width                                    | 365                       | 365                       | 365                        | 365                        | 365                        | 365                        |
| depth                                    | 580                       | 580                       | 580                        | 580                        | 580                        | 580                        |
| height                                   | 543                       | 543                       | 543                        | 543                        | 543                        | 543                        |
| Worktop type                             | Stainless Steel           | Stainless Steel           | Stainless Steel            | Stainless Steel            | Stainless Steel            | Stainless Steel            |
| Top material                             | 304 AISI                  | 304 AISI                  | 304 AISI                   | 304 AISI                   | Stainless Steel            | Stainless Steel            |
| N° of drawers                            |                           |                           | 2½                         | 2½                         |                            |                            |
| Door hinges                              | 1 Left+1 Right            | 1 Left+2 Right            | Right Side                 | 1 Left+1 Right             | 1 Left+1 Right             | Left                       |
| N° and type of grids (included)          | 2, GN 1/1                 | 3, GN 1/1                 | 1, GN 1/1                  | 2, GN 1/1                  | 2, GN 1/1                  | 3, GN 1/1                  |
| Compressor power - HP                    | 3/4                       | 3/4                       | 3/4                        | 3/4                        | 3/4                        | 3/4                        |
| N° defrost in 24 hrs.                    | every 6 hours             | every 6 hours             | every 6 hours              | every 6 hours              | every 6 hours              | every 6 hours              |
| Refrigerant type                         | R404a                     | R404a                     | R404a                      | R404a                      | R404a                      | R404a                      |
| Refrigerant quantity - g.                | 160                       | 200                       | 160                        | 200                        | 160                        | 200                        |
| Refrigeration power - W                  | 910                       | 910                       | 910                        | 910                        | 910                        | 910                        |
| Power - kW                               |                           |                           |                            |                            |                            |                            |
| installed-electric                       | 0.52                      | 0.7                       | 0.52                       | 0.7                        | 0.52                       | 0.7                        |
| Noise level - dBA                        | 57.6                      | 57.6                      | 58                         | 58                         | 57.6                       | 57.6                       |
| Net weight - kg.                         | 119                       | 119                       | 119                        | 142                        | 119                        | 119                        |
| Power supply - V, phases, Hz             | 230 V, 1N, 50             | 230 V, 1N, 50             | 230 V, 1N, 50              | 230 V, 1N, 50              | 230 V, 1N, 50              | 230 V, 1N, 50              |
| <b>INCLUDED ACCESSORIES</b>              |                           |                           |                            |                            |                            |                            |
| 1/1 GN GREY "RILSAN" GRID                | 2                         | 3                         | 1                          | 2                          | 2                          | 3                          |
| <b>ACCESSORIES</b>                       |                           |                           |                            |                            |                            |                            |
| KIT 2 S/S GRIDS GN1/1 FOR REFRIG.TABLES  | 880139                    | 880139                    | 880139                     | 880139                     | 880139                     | 880139                     |
| KIT 4 WHEELS (2 W/BRAKE)+4 (40MM)SPACERS | 880025                    | 880025                    | 880025                     | 880025                     | 880025                     | 880025                     |
| KIT DOOR REVERSIBILITY FOR REF.TABLES    | 880046                    | 880046                    | 880046                     | 880046                     | 880046                     | 880046                     |
| KIT HACCP EKIS                           | 922166                    | 922166                    | 922166                     | 922166                     | 922166                     | 922166                     |
| KIT INTEGRATED HACCP-DIG. REFR. (IR33)   | 880252                    | 880252                    | 880252                     | 880252                     | 880252                     | 880252                     |
| LOCK KIT                                 | 880024                    | 880024                    | 880024                     | 880024                     | 880024                     | 880024                     |
| PRINTER HACCP BASIC VERS-REF.DIGIT.CONTR | 881457                    | 881457                    | 881457                     | 881457                     | 881457                     | 881457                     |
| S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)   | 880140                    | 880140                    | 880140                     | 880140                     | 880140                     | 880140                     |
| STRUCTURE TO SUPPORT 3 GRIDS(RIGHT+LEFT) | 880047                    | 880047                    | 880047                     | 880047                     | 880047                     | 880047                     |


HBBC010

2011-06-10

Subject to change without notice

**Electrolux benefit counters  
Freezers**

728512, 727009, 728518

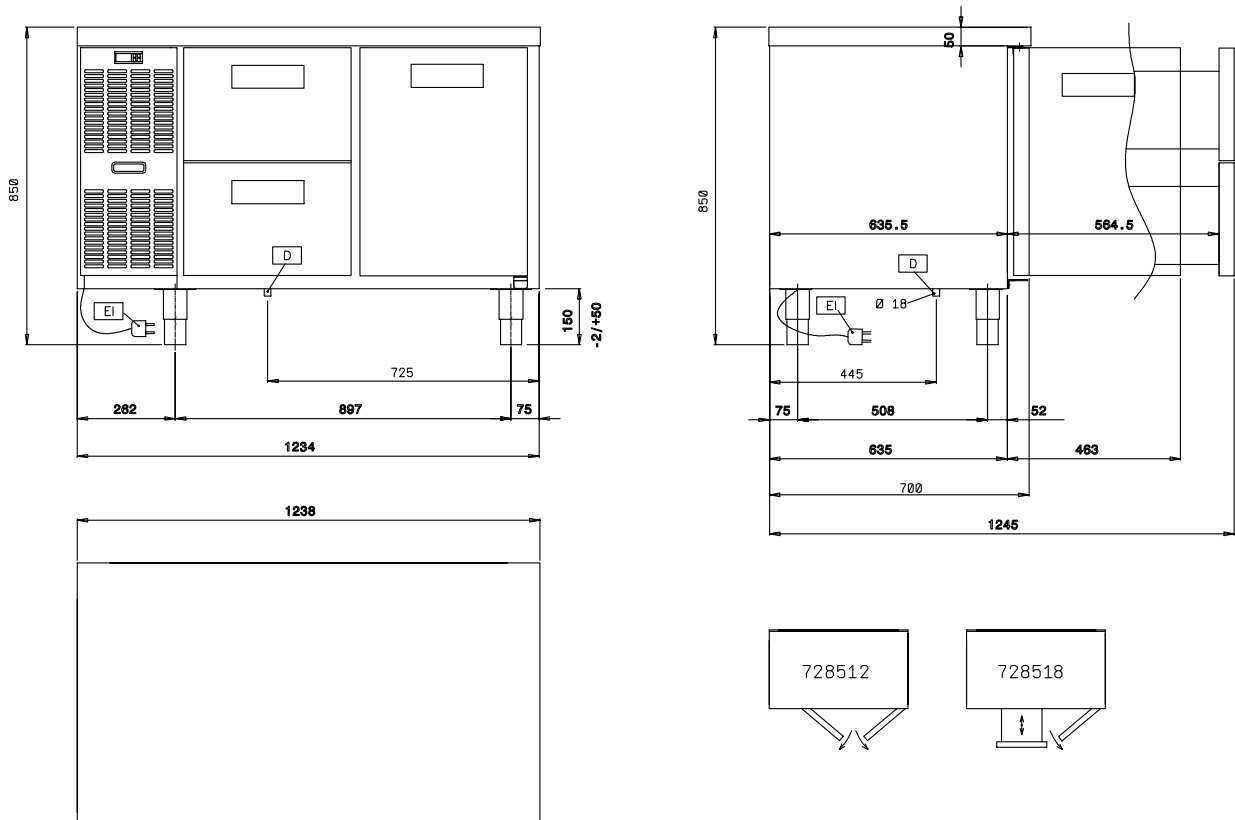

HBBC010




2011-06-10

Subject to change without notice

| LEGEND                     | RCSF2M2<br>728512 | RCSF2M12<br>728518 | RCSF2M24<br>727009 |
|----------------------------|-------------------|--------------------|--------------------|
| D - Water drain            | 16mm              | 16mm               | 16mm               |
| EI - Electrical connection | 230 V, 1N, 50     | 230 V, 1N, 50      | 230 V, 1N, 50      |

**Electrolux benefit counters  
Freezers**

728517, 727010, 728519

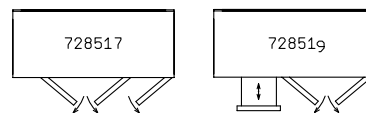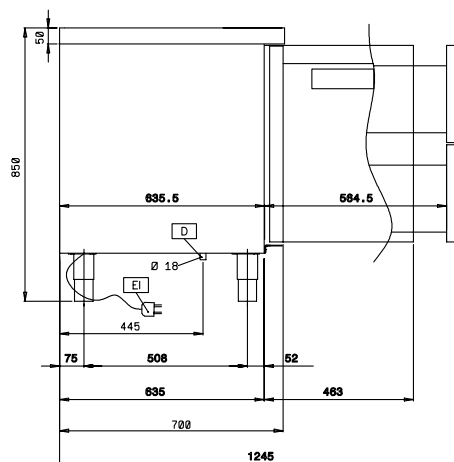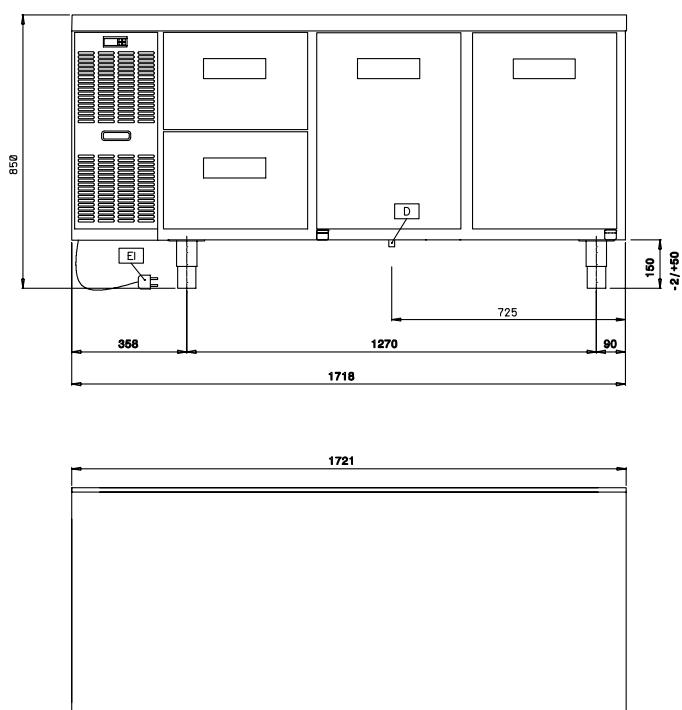

HBBC010

2011-06-10

| LEGEND                     | RCSF3M3<br>728517 | RCSF3M22<br>728519 | RCSF3M34<br>727010 |
|----------------------------|-------------------|--------------------|--------------------|
| D - Water drain            | 16mm              | 16mm               | 16mm               |
| EI - Electrical connection | 230 V, 1N, 50     | 230 V, 1N, 50      | 230 V, 1N, 50      |

Subject to change without notice