Electrolux benefit counters

Remote refrigerating unit

The Electrolux range of benefit counters combines the convenience of worktop space with cold storage. The models detailed on this sheet are benefit counters with a remote refrigerating unit and with various combinations of doors and drawers.



Model 726203

CONSTRUCTION

- · Internal and external doors, front and side panels and removable worktop (50mm thick) in 304 AISI stainless steel.
- Back in galvanized steel.
- Insulation guaranteed by high density expanded cyclopenthane 50 mm in thickness.
- Legs (150 mm high) in 304 AISI stainless steel with plastic interior and adjustable in height.
- CFC and HCFC free.
- All models comply with the standards required by the main international approval bodies and are (marked.

PERFORMANCES

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Completely automatic defrosting.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- Operating temperature: -2/+10°C.
- Refrigerant gas R404a.
- Possibility to install on socklet.

- Kit with 1/2 sized drawers available as accessory.
- The refrigeration unit can operate in tropical climates (+43°C ambient temperature).
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids (without the use of tools).
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.









Subject to change without notice


	RCSN2M2R 726202	RCSN3M3R 726210	RCSN4M4R 726213
TECHNICAL DATA			
Operating temperature - min/max °C	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - I.	265	415	560
Cooling unit	Remote	Remote	Remote
Control type	Digital	Digital	Digital
External dimensions - mm			·
width	1108	1587	2071
depth/with open doors	700, 1102	700, 1102	700, 1102
height	850	850	850
Worktop type	Stainless Steel	Stainless Steel	Stainless Steel
Top material	304 AISI	304 AISI	304 AISI
Min/Max internal humidity - %	50	50	50
Door - n.	2	3	4
Door hinges	1 Left+1 Right	1 Left+2 Right	2 Left+2 Right
N° and type of grids (included)	2, GN 1/1	3, GN 1/1	4, GN 1/1
N° defrost in 24 hrs.	every 6 hours	every 6 hours	every 6 hours
Refrigerant type	R404a	R404a	R404a
Refrigerant power			
at evaporation temperature - °C	-23	-20	-20
Power - kW			
installed-electric	0.009	0.015	0.009
Noise level - dBA	48	48	48
Net weight - kg.	107	130	174
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES			
1/1 GN GREY "RILSAN" GRID	2	3	4
ACCESSORIES	_		·
AUTOMATIC DEFROST WITH WASTE EVAPORATION	880028	880028	880028
KIT 2 S/S GRIDS GN1/1 FOR REFRIG.TABLES	880139	880139	880139
KIT 4 WHEELS (2 W/BRAKE)+4 (40MM)SPACERS	880025	880025	880025
KIT DOOR REVERSIBILITY FOR REF.TABLES	880046	880046	880046
KIT HACCP EKIS	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880252	880252	880252
LOCK KIT	880024	880024	880024
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038	881038
PRINTER HACCP BASIC VERS-REF.DIGIT.CONTR	881457	881457	881457
REMOTE UNIT FOR 2-3 DOOR REFRIG.TABLES	880044	880044	
REMOTE UNIT FOR 4 DOOR REFRIG.TABLES	·		880045
S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)	880140	880140	880140
STRUCTURE TO SUPPORT 3 GRIDS(RIGHT+LEFT)	880047	880047	880047
TWO ½ DRAWER KIT	880023	880023	880023

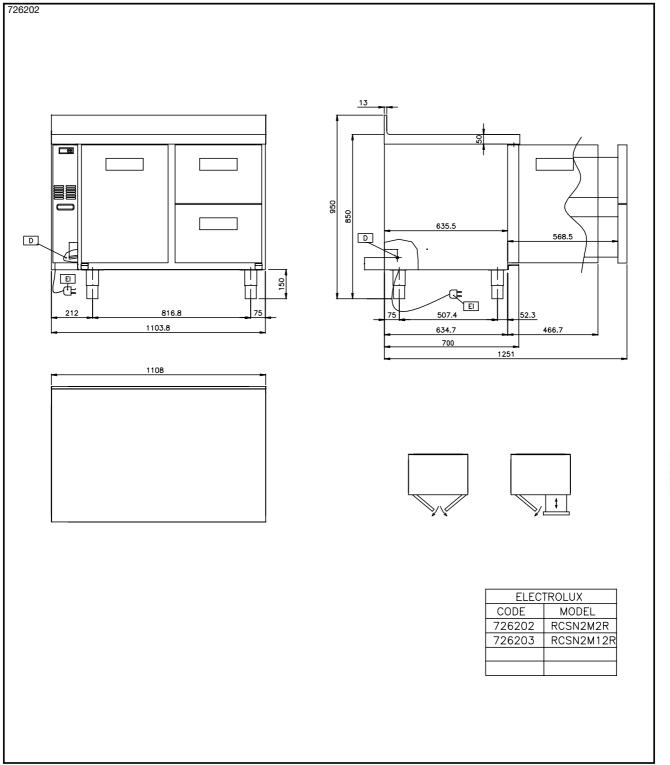

	RCSN2M2R 726202
LEGEND	
D - Water drain	16mm
ED - Remote electrical connection	•
EI - Electrical connection	230 V. 1N. 50

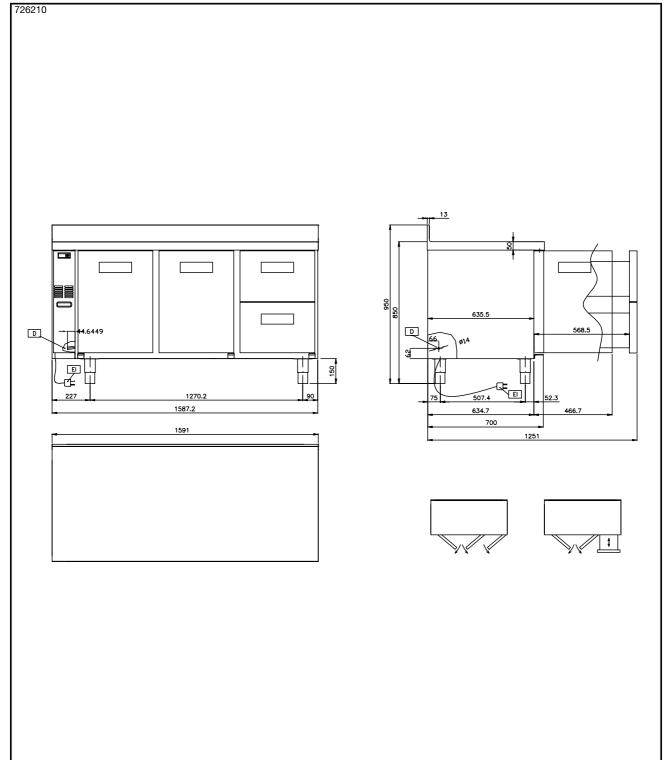

	RCSN3M3R 726210
LEGEND	
D - Water drain	16mm
ED - Remote electrical connection	•
El - Electrical connection	230 V. 1N. 50

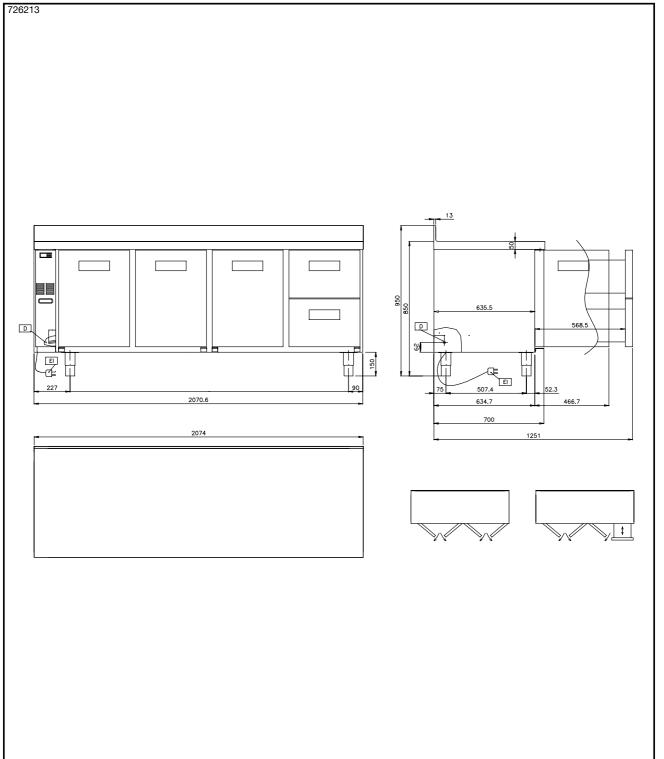

	RCSN4M4R 726213
LEGEND	
D - Water drain	16mm
ED - Remote electrical connection	•
El - Electrical connection	230 V. 1N. 50