



Electrolux

Digital Undercounter Benefit-Line Refrigerated Counter 6 Drawers

ITEM # _____

MODEL # _____


NAME # _____

SIS # _____

AIA # _____



Electrolux

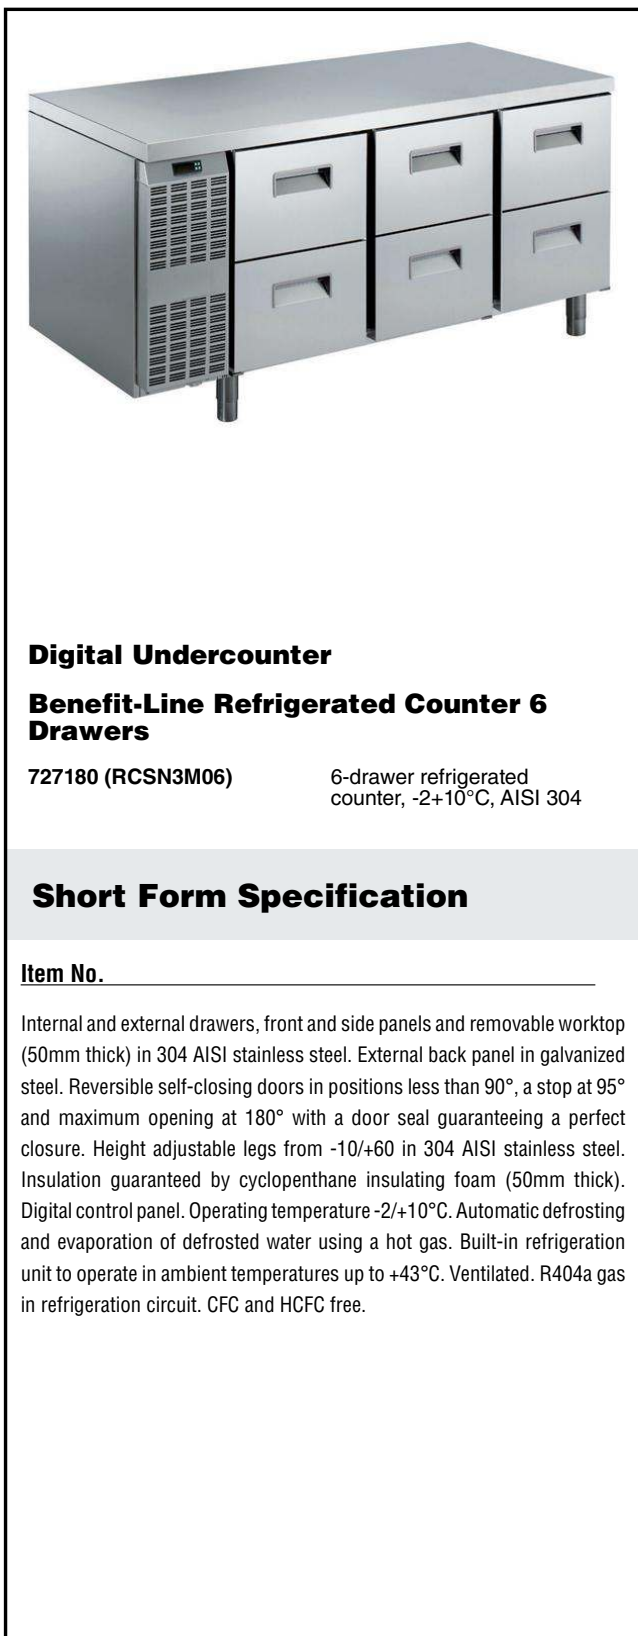

Digital Undercounter

Benefit-Line Refrigerated Counter 6 Drawers

727180 (RCSN3M06)

6-drawer refrigerated counter, -2/+10°C, AISI 304

Short Form Specification

Item No. _____

Internal and external drawers, front and side panels and removable worktop (50mm thick) in 304 AISI stainless steel. External back panel in galvanized steel. Reversible self-closing doors in positions less than 90°, a stop at 95° and maximum opening at 180° with a door seal guaranteeing a perfect closure. Height adjustable legs from -10/+60 in 304 AISI stainless steel. Insulation guaranteed by cyclopentane insulating foam (50mm thick). Digital control panel. Operating temperature -2/+10°C. Automatic defrosting and evaporation of defrosted water using a hot gas. Built-in refrigeration unit to operate in ambient temperatures up to +43°C. Ventilated. R404a gas in refrigeration circuit. CFC and HCFC free.

APPROVAL: _____

Main Features

- Suitable for use in ambient temperatures of up to 43 °C.
- Complies with main international certification bodies and CE marked.
- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Operating temperature can be adjusted from -2 to 10 °C to suit different food storage requirements.
- CFC and HCFC free.
- Completely automatic defrosting and automatic evaporation of defrost water by hot gas.
- Forced air cooling system guaranteeing great uniformity of the temperature in the counter and excellent conservation of the food quality.
- High standards of hygiene and ease of cleaning are guaranteed by the rounded internal corners of the cabinet and easily removable runners and grids.
- Kit 1/2 drawers available as accessory.
- The door self-closes when opened less than at a 90° angle and is equipped with a door seal to guarantee perfect closure.

Construction

- Refrigerant type: R404a.
- Legs in 304 AISI stainless steel (150 mm high, adjustable in height), with plastic interior.
- Insulation guaranteed by high density expanded cyclopentane 50 mm in thickness.
- Internal and external doors, front and side panels and 50mm thick removable worktop in 304 AISI stainless steel.
- Back panel in galvanized steel.

Optional Accessories


- Lock kit for Benefit line counters PNC 880024
- Wheels kit PNC 880025
- Kit for integrated HACCP advanced connection (Carel) for digital ecostore cabinets and counters (not for ecostore Touch models) PNC 880252
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457
- Kit HACCP EKIS PNC 922166

Benefit-Line Refrigerated Counter 6 Drawers
Digital Undercounter



Electrolux

Digital Undercounter Benefit-Line Refrigerated Counter 6 Drawers

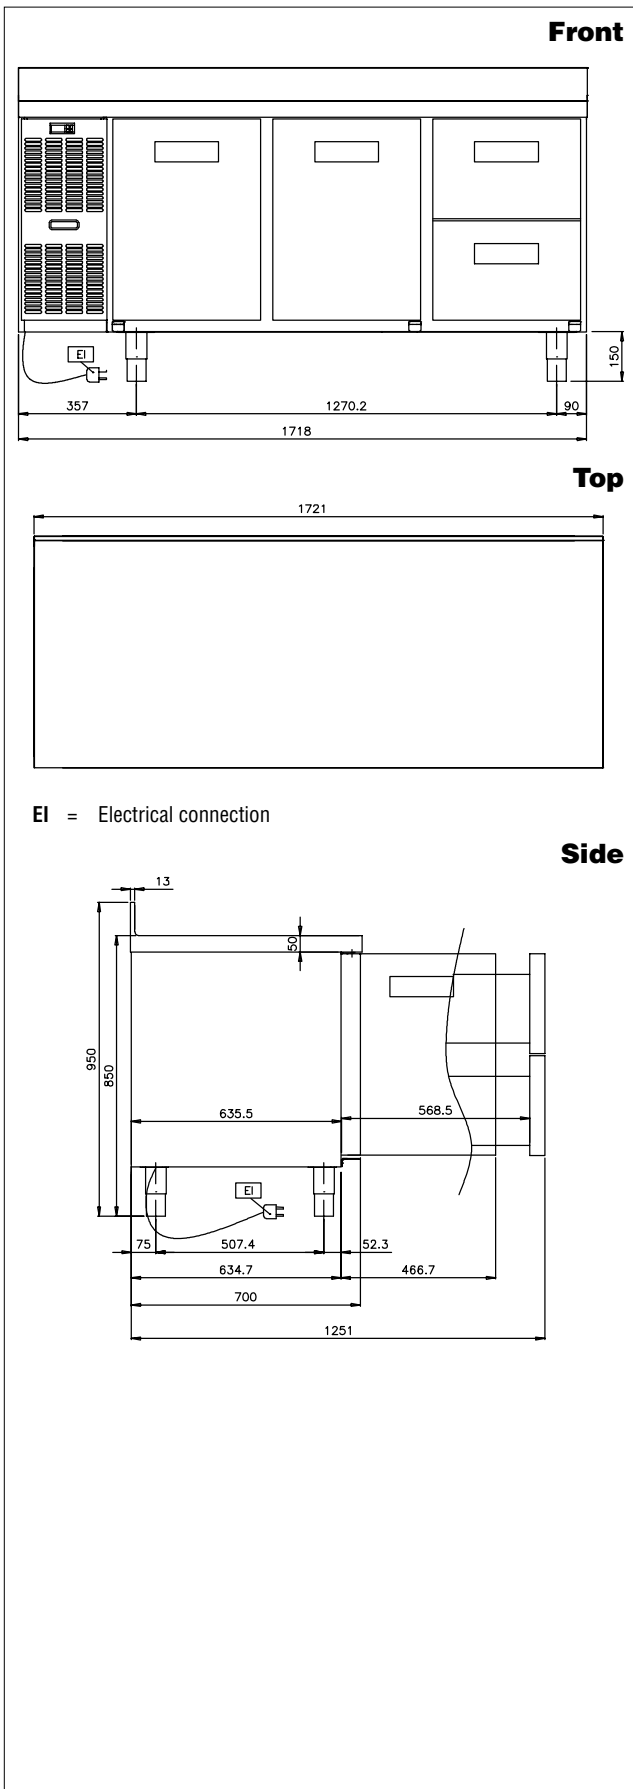

Electric

Supply voltage:

727180(RCSN3M06)

230 V/1N ph/50 Hz

Connected load:

0.267 kW

Key Information:

External dimensions, Height:	850 mm
External dimensions, Width:	1718 mm
External dimensions, Depth with Doors Open:	1102 mm
Internal Dimensions (depth):	580 mm
Internal Dimensions (height):	543 mm
Internal Dimensions (width):	365 mm
Gross capacity:	415 lt
Net weight:	154 kg
Noise level:	55 dBA
N° of drawers:	6x1/2
Built-in Compressor and Refrigeration Unit	

Refrigeration Data

Control type:	Digital
Compressor power:	1/3 hp
Refrigerant type:	R404a
Refrigeration power:	448 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	160 g
Min/Max internal humidity:	50
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
N° defrost in 24 hrs:	every 6 hrs



Digital Undercounter Benefit-Line Refrigerated Counter 6 Drawers

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.