

Refrigerators - 3 compartments

Electrolux Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements.



728294

- 150mm height-adjustable feet.
- Internal and external doors, front and side panels and worktop in 304 AISI stainless steel.
- Rounded internal corners for ease of cleaning.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Digital control panel.
- Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2/+10 °C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Drain outlet and automatic evaporation of defrost water.
- Access to all components from the front.
- In compliance with CE requirements.
- C.F.C. and H.C.F.C. free.
- High-density expanded polyurethane foam 50 mm in thickness with cyclopentane injection.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.

**Electrolux concept counters
Refrigerators - 3 compartments**

	HB3P 728207	HB2P2C 728235	HB1P4C 728241	HB6C 728242	HB3PNT 727106
TECHNICAL DATA					
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	420	420	420	420	415
Cooling unit	Built-In	Built-In	Built-In	Built-In	Built-In
External dimensions - mm					
width	1721	1721	1721	1721	1721
depth/with open doors	700, 1102	700, 1102	700, 1102	700	700, 1098
height	850	850	850	850	800
Internal dimensions - mm					
depth	580	580	580		580
height	543	543	543		543
Worktop type	Stainless Steel	Stainless Steel	Stainless Steel		none
No worktop					●
Min/Max internal humidity - %	50	50	50	50	50
N° of drawers		2x1/2	4x1/2	6x1/2	
N° and type of door	3	2	1		3
Compressor power - HP	1/3	1/3	1/3	1/3	1/3
N° defrost in 24 hrs.	4/20	4/20	4/20	4/20	4/20
Refrigerant type	R404a	R404a	R404a	R404a	R404a
Refrigerant quantity - g.	160	160	160	160	160
Refrigeration power - W	448	448	448	448	448
Refrigerant power					
at evaporation temperature - °C	-10	-10	-10	-10	-10
Power - kW					
installed-electric	0.293	0.293	0.293	0.293	0.293
Net weight - kg.	142	150	158	168	142
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES					
1/1 GN GREY "RILSAN" GRID	3	2	1		3
ACCESSORIES					
2x½ DRAWER KIT FOR REFRIGERATED TABLES	880118	880118	880118		880118
3x1/3 DRAWER KIT FOR REFRIGERATED TABLES	880115	880115	880115	880115	880115
DRAWER KIT-1/3+2/3 (BOTTLES)-REF. TABLES	880126	880126	880126	880126	880126
KIT 2 S/S GRIDS GN1/1 FOR REFRIG. TABLES	880139	880139	880139		880139
KIT 4 WHEELS (2 W/BRAKE)+4 (40MM) SPACERS	880025	880025	880025	880025	880025
KIT DOOR REVERSIBILITY FOR REF. TABLES	880046	880046	880046	880046	880046
KIT HACCP EKIS	922166	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880252	880252	880252	880252	880252
LOCK KIT FOR REFRIGERATED TABLES	880130	880130	880130	880130	880130
PRINTER HACCP BASIC VERS-REF.DIGIT.CONTR	881457	881457	881457	881457	881457
S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)	880140	880140	880140		880140
WORKTOP FOR 3 DOOR REFRIGERATED TABLES					880196
WORKTOP+UPSTAND FOR 3 DOOR REFRIG. TABLE					880098


HBAC060

2011-06-10

Subject to change without notice

**Electrolux concept counters
Refrigerators - 3 compartments**

728207, 728242, 728241, 728235

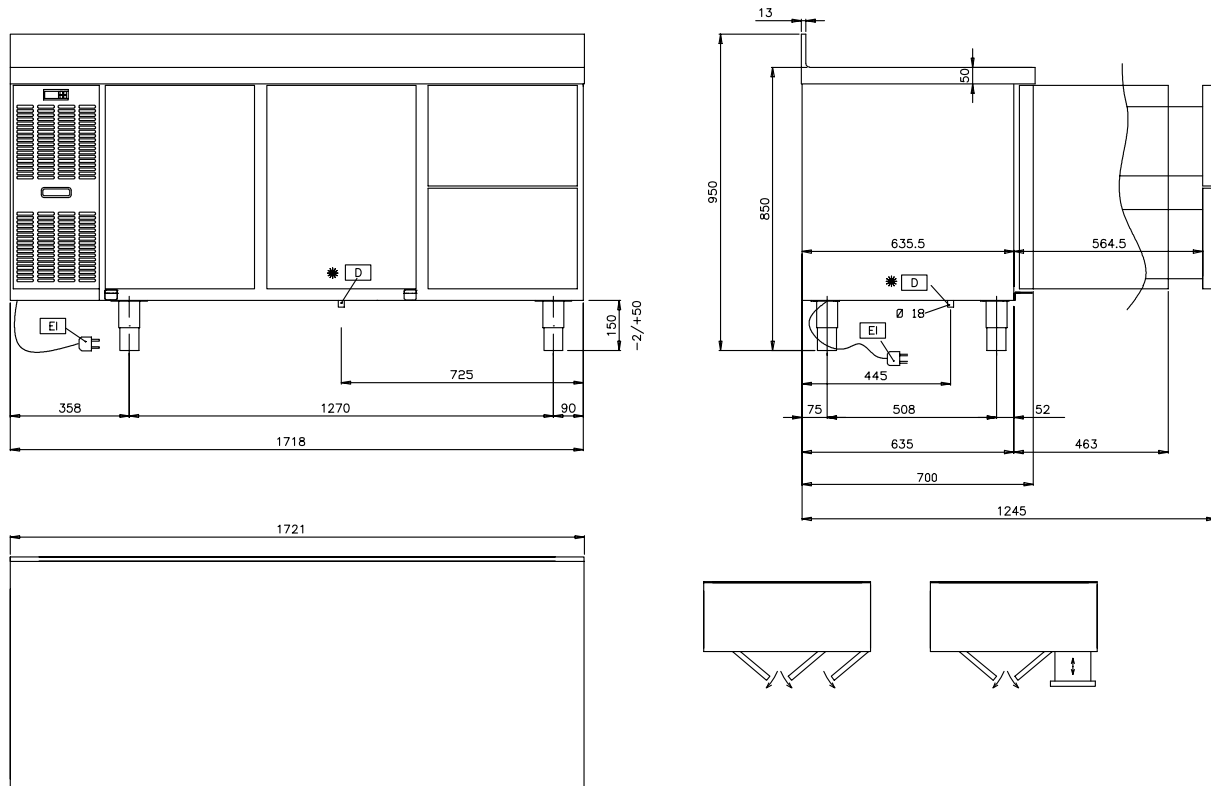

HBAC060





2011-06-10

LEGEND	HB3P 728207	HB2P2C 728235	HB1P4C 728241	HB6C 728242
D - Water drain	18mm	18mm	18mm	16mm
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50

Subject to change without notice

Electrolux concept counters
Refrigerators - 3 compartments

727106

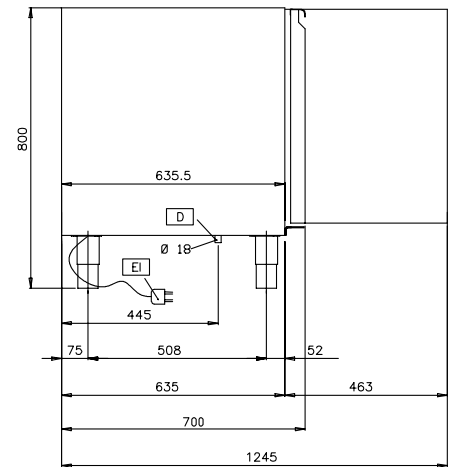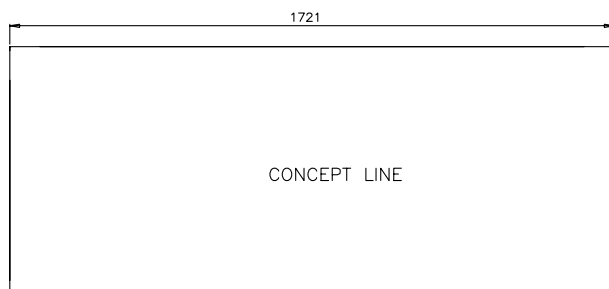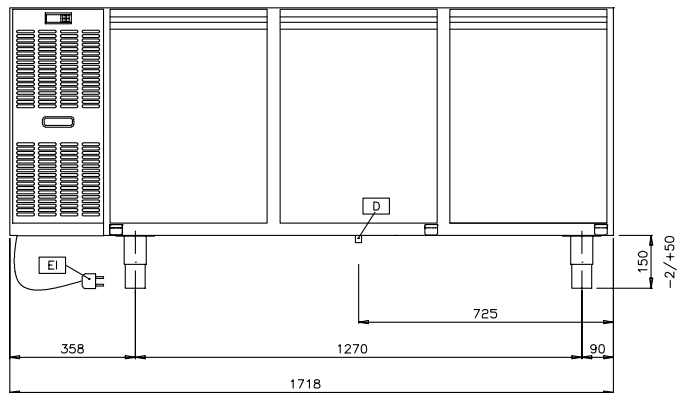

HBAC060

2011-06-10

LEGEND	HB3PNT 727106
	18mm
	230 V, 1N, 50
D - Water drain	
EI - Electrical connection	

Subject to change without notice