

Electrolux concept counters - Remote

Refrigerators - 4 compartments

Electrolux Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements.



728297

- Remote refrigeration unit.
- 150mm height-adjustable feet.
- Internal and external doors, front and side panels and worktop in 304 AISI stainless steel.
- Rounded internal corners for ease of cleaning.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Digital control panel.
- Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2/+10 °C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Drain outlet and automatic evaporation of defrost water.
- Access to all components from the front.
- In compliance with CE requirements.
- C.F.C. and H.C.F.C. free.
- High-density expanded polyurethane foam 50 mm in thickness with cyclopentane injection.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.



Electrolux

**Electrolux concept counters - Remote
Refrigerators - 4 compartments**

	HB4PR 728297	HB3P2CR 728298	HB2P4CR 728299	HB8CR 728300	HB4PNTR 727110
TECHNICAL DATA					
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	560	560	560	560	560
Cooling unit	Remote	Remote	Remote	Remote	Remote
External dimensions - mm					
width	2074	2074	2074	2074	2074
depth/with open doors	700, 1102	700, 1102	700, 1102	700, 1102	700, 1098
height	850	850	850	850	800
Internal dimensions - mm					
depth	580	580	580	580	580
height	543	543	543	543	543
Worktop type	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	none
No worktop					●
Min/Max internal humidity - %	50	50	50	50	50
N° of drawers		2½	4x1/2	8x1/2	
N° and type of door	4	3	2	none	4
Door hinges	2 Left+2 Right	2 Left+1 Right	1 Left+1 Right		2 Left+2 Right
N° defrost in 24 hrs.	4/30	4/30	4/30	4/30	4/30
Refrigerant type	R404a	R404a	R404a	R404a	R404a
Refrigerant power					
at evaporation temperature - °C	-20	-20	-20	-20	-20
Power - kW					
installed-electric	0.009	0.009	0.009	0.009	0.009
Net weight - kg.	174	182	198	198	174
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES					
1/1 GN GREY "RILSAN" GRID	4	3	2		4
ACCESSORIES					
2x½ DRAWER KIT FOR REFRIGERATED TABLES	880118	880118	880118		880118
3x1/3 DRAWER KIT FOR REFRIGERATED TABLES	880115	880115	880115	880115	880115
AUTOMATIC DEFROST WITH WASTE EVAPORATION	880028	880028	880028	880028	880028
DRAWER KIT-1/3+2/3 (BOTTLES)-REF.TABLES	880126	880126	880126	880126	880126
KIT 2 S/S GRIDS GN1/1 FOR REFRIG.TABLES	880139	880139	880139		880139
KIT 4 WHEELS (2 W/BRAKE)+4 (40MM)SPACERS	880025	880025	880025	880025	880025
KIT DOOR REVERSIBILITY FOR REF.TABLES	880046	880046	880046	880046	880046
KIT HACCP EKIS	922166	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880252	880252	880252	880252	880252
LOCK KIT FOR REFRIGERATED TABLES	880130	880130	880130	880130	880130
PRINTER HACCP BASIC VERS-REF.DIGIT.CONTR	881457	881457	881457	881457	881457
REMOTE UNIT FOR 4 DOOR REFRIG.TABLES	880045	880045	880045	880045	880045
S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)	880140	880140	880140		880140
WORKTOP FOR 4 DOOR REFRIG.TABLES-REMOTE					880199
WORKTOP+UPSTAND F. 4 DOOR REF.TABLE-REM					880114


HBAC040

2011-06-10

Subject to change without notice

**Electrolux concept counters - Remote
Refrigerators - 4 compartments**

728297, 728300, 728299, 728298

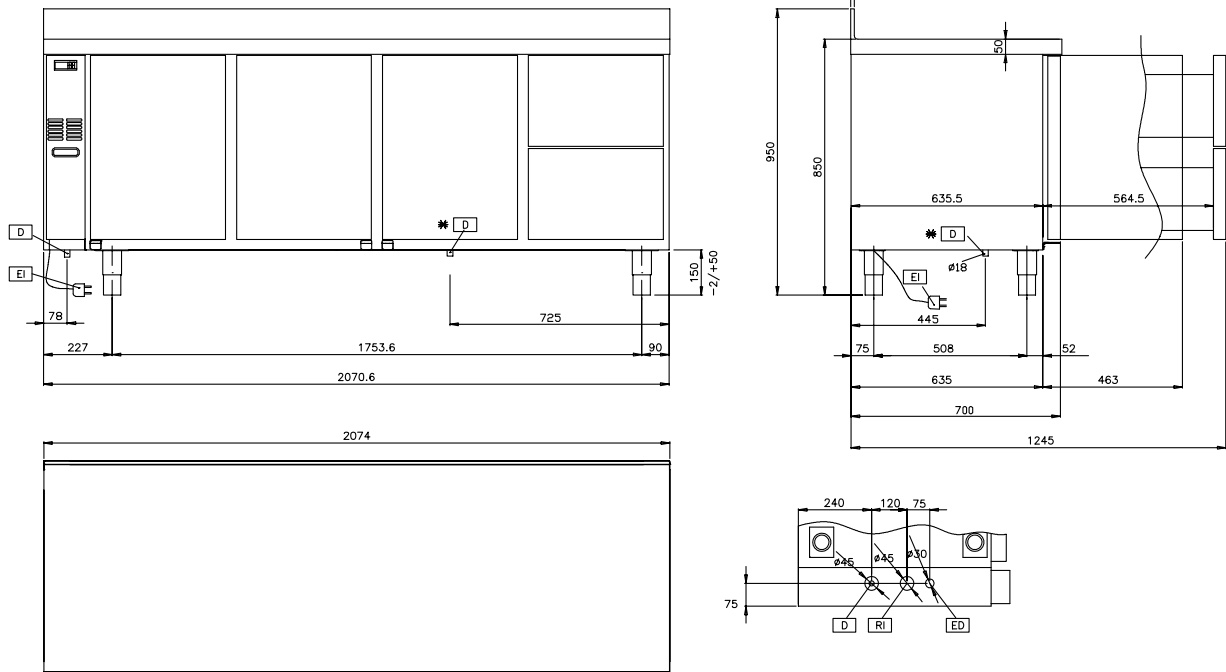

HBAC040


2011-06-10

LEGEND	HB4PR 728297	HB3P2CR 728298	HB2P4CR 728299	HB8CR 728300
D - Water drain	18mm	18mm	18mm	18mm
ED - Remote electrical connection	●	●	●	●
EI - Electrical connection	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50

Subject to change without notice

Electrolux concept counters - Remote
Refrigerators - 4 compartments

727110

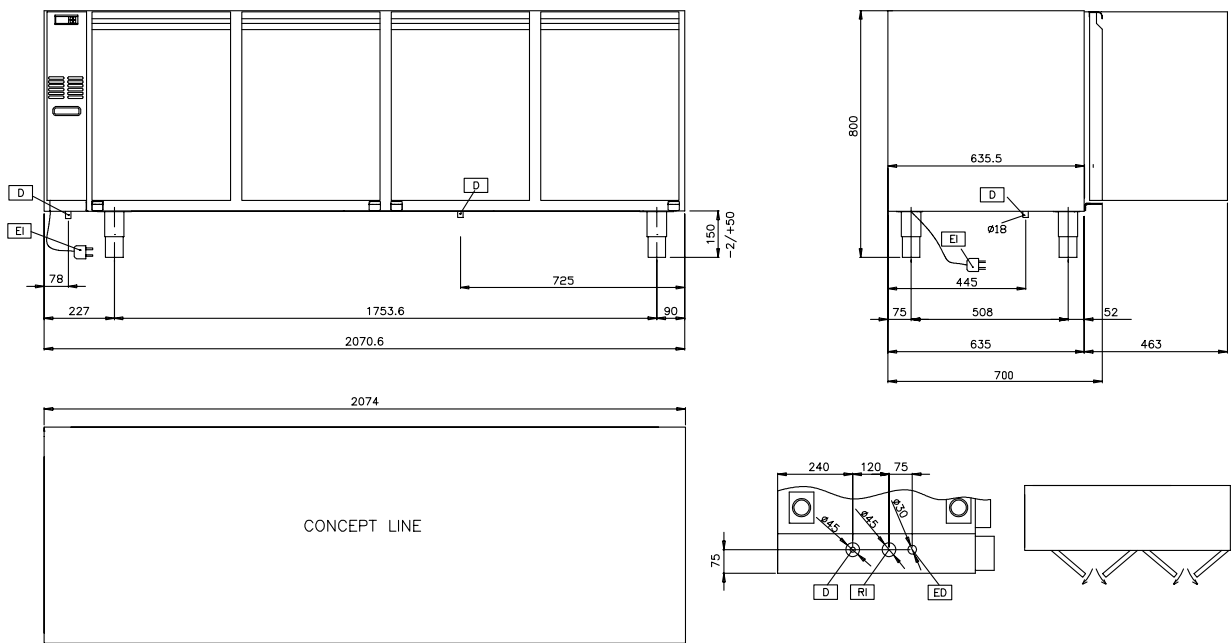

LEGEND D - Water drain ED - Remote electrical connection EI - Electrical connection	HB4PNTR 727110
	18mm
	●
	230 V, 1N, 50

HBAC040

2011-06-10

Subject to change without notice