

Refrigerators with upstand - 3 comp.

Electrolux Professional have designed and produced a complete range of refrigerated tables, that combines the dual function of worktop and refrigerated table. This versatility allows notable savings in space whilst offering functional and modular solutions to kitchen requirements.



728294

- Height-adjustable feet.
- Internal and external doors, front and side panels and worktop in 304 AISI stainless steel.
- Rounded internal corners for ease of cleaning.
- Refrigerated compartment designed to accommodate GN 1/1 containers.
- Digital control panel.

- Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2/+10 °C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Drain outlet and automatic evaporation of defrost water.
- Access to all components from the front.

- In compliance with CE requirements.
- C.F.C. and H.C.F.C. free.
- High-density expanded polyurethane foam 50 mm in thickness with cyclopentane injection.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.

Electrolux concept counters
Refrigerators with upstand - 3 comp.

	HB3PU 728510	HB2P2CU 728532	HB1P4CU 728541	HB6CU 728542
TECHNICAL DATA				
Operating temperature - min/max °C	-2/10	-2/10	-2/10	-2/10
Operating mode	Ventilated	Ventilated	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	420	420	420	420
Cooling unit	Built-In	Built-In	Built-In	Built-In
External dimensions - mm				
width	1721	1721	1721	1721
depth/with open doors	700, 1102	700, 1102	700, 1102	700, 1102
height	950	950	950	950
Internal dimensions - mm				
depth	580	580	580	580
height	543	543	543	543
Upstand	●	●	●	●
Min/Max internal humidity - %	50	50	50	50
N° of drawers		2x1/2	4x1/2	6x1/2
N° and type of door	3	2, GN 1/1	1	
Door hinges		1 Left+1 Right	Left	
Compressor power - HP	1/3	1/3	1/3	1/3
N° defrost in 24 hrs.	4/20'	4/20	4/20	4/20
Refrigerant type	R404a	R404a	R404a	R404a
Refrigerant quantity - g.	160	160	160	160
Refrigeration power - W	448	448	448	448
Refrigerant power				
at evaporation temperature - °C	-10	-10	-10	-10
Power - kW				
installed-electric	0.293	0.293	0.293	0.293
Net weight - kg.	143	147	151	154
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
INCLUDED ACCESSORIES				
1/1 GN GREY "RILSAN" GRID	3	2	1	
ACCESSORIES				
2x½ DRAWER KIT FOR REFRIGERATED TABLES	880118	880118	880118	880118
3x1/3 DRAWER KIT FOR REFRIGERATED TABLES	880115	880115	880115	880115
DRAWER KIT-1/3+2/3 (BOTTLES)-REF.TABLES	880126	880126	880126	880126
KIT 2 S/S GRIDS GN1/1 FOR REFRIG.TABLES	880139	880139	880139	880139
KIT 4 WHEELS (2 W/BRAKE)+4 (40MM)SPACERS	880025	880025	880025	880025
KIT DOOR REVERSIBILITY FOR REF.TABLES	880046	880046	880046	880046
KIT HACCP EKIS	922166	922166	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880252	880252	880252	880252
LOCK KIT FOR REFRIGERATED TABLES	880130	880130	880130	880130
PRINTER HACCP BASIC VERS-REF.DIGIT.CONTR	881457	881457	881457	881457
S/S STRUCTURE TO SUPPORT 6 GRIDS (R+L)	880140	880140	880140	880140
STRUCTURE TO SUPPORT 3 GRIDS(RIGHT+LEFT)	880047	880047	880047	880047


HBAC090

2011-06-10

Subject to change without notice

Electrolux concept counters
Refrigerators with upstand - 3 comp.

728510, 728542, 728541, 728532

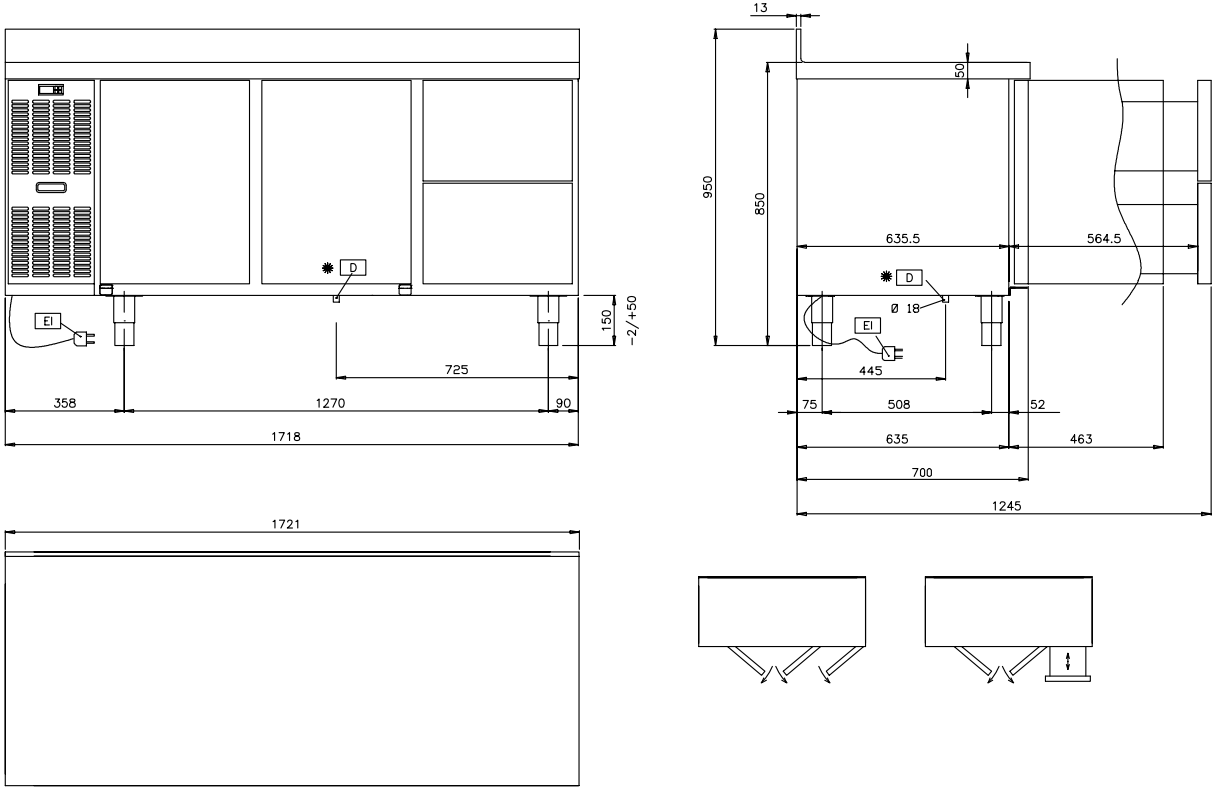

HBAC090

2011-06-10

Subject to change without notice

LEGEND	HB3PU 728510	HB2P2CU 728532	HB1P4CU 728541	HB6CU 728542
	18mm	18mm	18mm	18mm
D - Water drain	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50	230 V, 1N, 50
EI - Electrical connection				