

Saladette & Sandwich counter

The Electrolux range of refrigerated counters combines a worktop in hygienic stainless steel with the convenience of built-in cold storage compartments beneath. All models in the range are manufactured throughout in stainless steel to meet the highest hygiene standards.



728627

EASY TO INSTALL

- Built-in refrigeration unit.
- Height-adjustable feet.

EASY TO CLEAN

- Constructed in AISI 304 stainless steel to meet the highest hygiene standards (excluding model SAL25L2C94).
- Rounded internal corners for ease of cleaning.

EASY TO USE

- Lower refrigerated compartment designed to accommodate GN 1/1 containers.
- Digital control panel.
- Suitable to operate in ambient temperatures up to +32°C.
- Temperature range: +2/+10 °C.
- Forced air circulation for rapid cooling and an even temperature distribution.
- Drain outlet and automatic evaporation of defrost water.

EASY TO MAINTAIN

- Access to all components from the front.
- In compliance with CE requirements.

EASY ON THE ENVIRONMENT

- C.F.C. and H.C.F.C. free
- Environmentally friendly: R134a.
- High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection..
- Developed and produced in ISO 9001 and ISO 14001 certified factory.



Electrolux

Electrolux Saladette
Saladette & Sandwich counter

	PTR259 728628	SAL25L2C9 728627
TECHNICAL DATA		
Operating temperature - min/max °C	2/10	2/10
Operating mode	Ventilated	Ventilated
Gross capacity (D.I.N. 8952) - l.	250	250
Cooling unit	Built-In	Built-In
External dimensions - mm		
width	950	955
depth/with open doors	700, 1120	700, 1120
height	1126	845
Internal dimensions - mm		
width	870	870
depth	550	550
height	520	520
Worktop type	Marble	Plastic
Min/Max internal humidity - %	50/70	50/70
N° of drawers	None	None
N° and type of door	2	2
Door hinges	1 Left+1 Right	1 Left+1 Right
Compressor power - HP	1/4;	1/4;
N° defrost in 24 hrs.	4/25'	4/25'
Refrigerant type	R134a	R134a
Refrigerant quantity - g.	120	120
Refrigeration power - W	224	224
Power - kW		
installed-electric	0.29	0.29
Net weight - kg.	99	82
Power supply - V, phases, Hz	230 V, 1N, 50	230 V, 1N, 50
ACCESSORIES		
1/1 GN GREY "RILSAN" GRID	881435	881435
KIT 4 WHEELS FOR 250L COUNTER/SALADETTE		880267
KIT HACCP EKIS	922166	922166
KIT INTEGRATED HACCP-DIG. REFR. (IR33)	880252	880252
PLASTIC CONTAINER GN 1/1 H=100 MM	811451	811451
PLASTIC CONTAINER GN 1/1 H=150 MM	881040	881040
PLASTIC CONTAINER GN 1/1 H=65 MM	881038	881038


HBC030

2011-06-10

Subject to change without notice

Electrolux Saladette
Saladette & Sandwich counter

728628

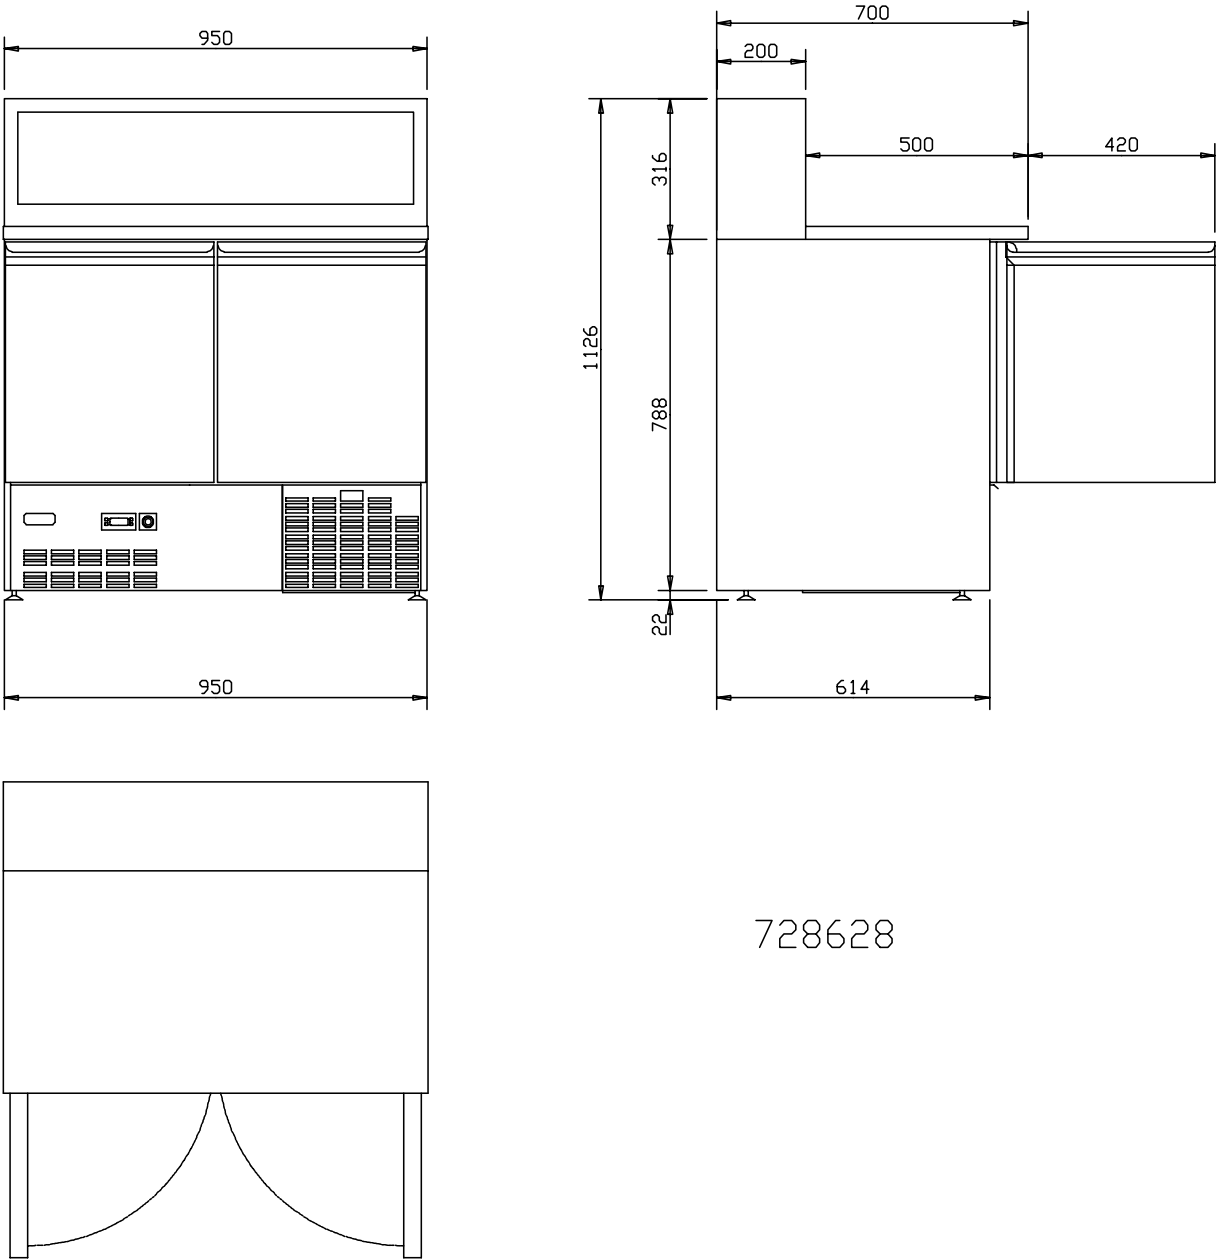

HBC030

2011-06-10

Subject to change without notice

LEGEND




EI - Electrical connection

**PTR259
728628**

230 V, 1N, 50

Electrolux Saladette
Saladette & Sandwich counter

728627

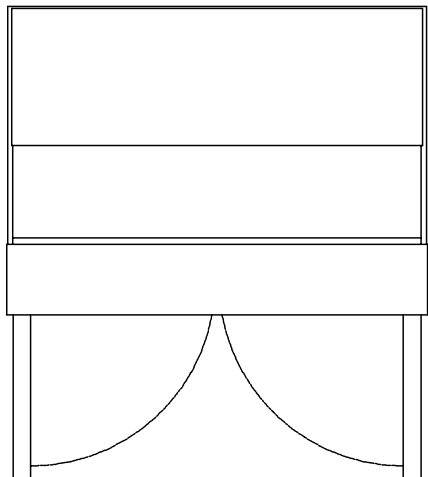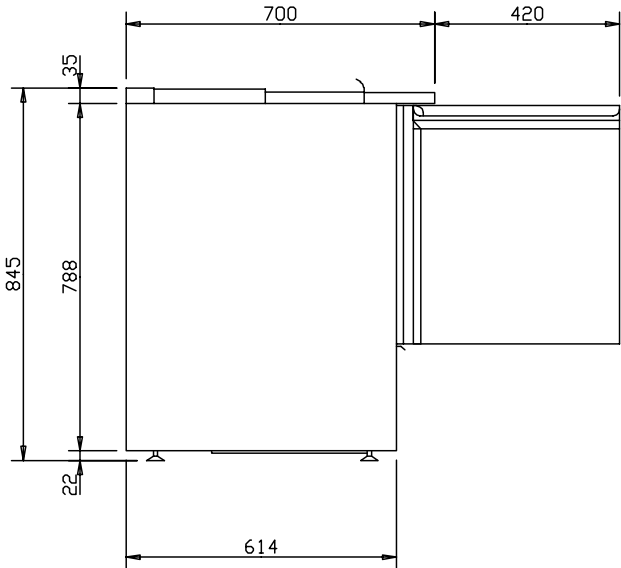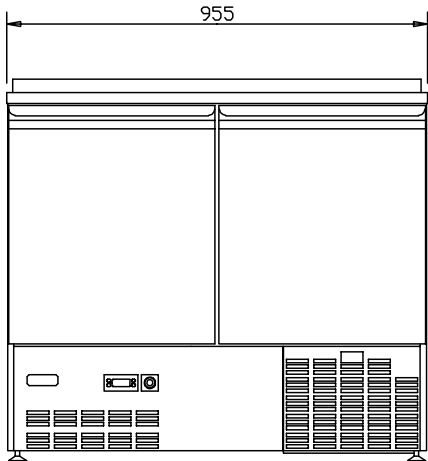

728627

HBC030

2011-06-10

Subject to change without notice

LEGEND

EI - Electrical connection

**SAL25L2C9
728627**

230 V, 1N, 50