



Electrolux

Digital Cabinets Freezer Counter 160 lt - undercounter

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux



Digital Cabinets

Freezer Counter 160 lt - undercounter

727228 (RUCF16X1C) Undercounter Refrigerator 160
lt - 1 door / stainless steel -
230 V/1N/50Hz

727222 (RUCF16W1C) Undercounter Refrigerator 160
lt - 1 door / white - 230
V/1N/50Hz

Short Form Specification

Item No. _____

The Electrolux range of 160 liter refrigerated counters offers customers a reliable, compact and easy to use cold storage. All the internal finishings are in commercial grade High Impact Polystyrene and all models require only 1 phase 220/240 V supply, allowing to be plugged directly into an existing power socket. Models are designed to operate at an ambient temperature of up to 43°C. The models detailed in this sheet are 160 liter undercounter refrigerators with stainless steel or white painted door.

Main Features

- R134a gas in refrigeration circuit.
- Suitable for use in ambient temperatures of up to 43 ° C.
- Very quiet operation: noise level less than 45 dB (A).
- Digital temperature display and simple electromechanical control panel.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Compact cooling unit easily accesible from the rear of the appliance.
- Simple control panel.
- Model requires only 1 phase 220/240V supply and can be plugged straight into an existing power socket.
- Manual defrost.

Construction

- Interior cell is completely in white High Impact Polystyrene and has no joints to eliminate dirt traps.
- CFC and HCFC-free insulation.
- IP23 protection index.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Reversible door.
- Lockable door.

Optional Accessories

- 3 rilsan baskets for 160lt undercounter freezer ☐ PNC 880189


APPROVAL: _____




Electrolux

Digital Cabinets Freezer Counter 160 lt - undercounter

Front

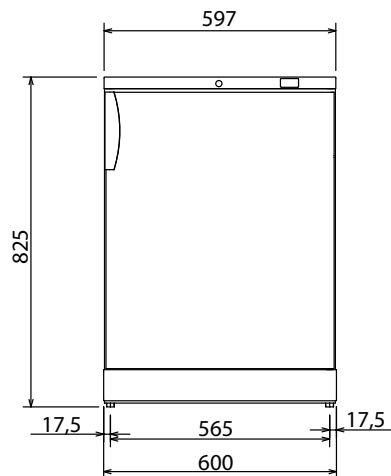


Top

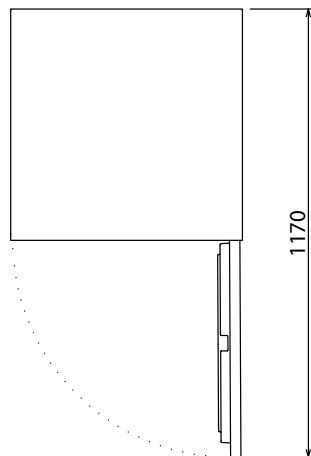

EI = Electrical connection

Side

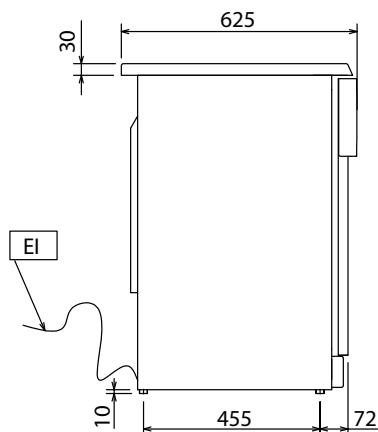

Electric

Supply voltage:

727228(RUCF16X1C)

230 V/1 ph/50 Hz

727222(RUCF16W1C)

230 V/1 ph/50 Hz

Connected load:

0.12 kW

Key Information:

Door hinges:	Right Side
External dimensions, Height:	825 mm
External dimensions, Width:	600 mm
Number and type of doors:	1 Full
Gross capacity:	110 lt
Noise level:	45 dBA
Height adjustment:	0/10 mm

Refrigeration Data

Control type:	Electronic
Refrigerant type:	R134a
Refrigeration power:	153 W
Refrigeration power at evaporation temperature:	-30 °C
Refrigerant weight:	110 g
Operating temperature min.:	-24 °C
Operating temperature max.:	-15 °C
External side panels:	
727228(RUCF16X1C)	Prepainted Steel
727222(RUCF16W1C)	Prepainted white
External top panels:	Stainless Steel
External door material:	
727228(RUCF16X1C)	Stainless steel antifingertip
727222(RUCF16W1C)	Prepainted white
Internal panels material:	High Impact White Polystyrene
Operating mode:	Static
Cooling unit:	Built-In



Digital Cabinets
Freezer Counter 160 lt - undercounter

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2012.09.28