Gas Fryer Tops

The 700XP range is comprised of over 100 models designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel socle, bridged or cantilever. Thanks to its advance technology and premium performance, 700XP is a perfect solution for institutions of small sizes with limited footprint as well as restaurants needing to obtain the most from the kitchen space. The models detailed in this sheet are 7-liter gas frver tops.



371066

EASY TO INSTALL

- Main connections can be accessed via the rear of the unit.
- Access to all components from the front
- Provided with a service duct to facilitate installation and can be mounted on table tops, open base cupboards bridging or cantilever supports.

EASY TO CLEAN

- Deep drawn V-Shaped well with rounded corners and external burners for safe and easy cleaning.
- One piece pressed worktop in 1,5mm stainless steel with smooth, rounded corners.
- Exterior panels in stainless steel with Scotch Brite finish.
- All models have right-angled, laser cut side edges to allow

flush-fitting joins between units eliminating gaps and possible dirt traps.

 Oil drainage via a tap with push and turn safety mechanism, located on the front panel of the unit.

EASY TO USE

- The gas fryer top with V-Shaped well is ideal for kitchens needing a versatile, efficient and easy to clean unit capable of cooking numerous portions time after time. The V-Shaped well is equipped with high efficiency external burners guaranteeing a longer oil life (compared to fryers with burners inside the well) as well as a uniform distribution of heat.
- · Stainless steel burners with optimized combustion, flame

failure device and protected pilot

- The external burners guarantee a long oil life thanks to the indirect heating system and uniform distribution of heat.
- Thermostatic regulation of oil temperature from 105°C to 185°C.
- Overheat safety thermostat.
- Piezo spark ignition for added
- All gas appliances are supplied for use with natural gas or LPG. Conversion jets supplied as standard.

EASY TO MAINTAIN

- IPX4 water protection.
- The special design of the control knobs and bezels guarantees against water infiltration.









700XP Gas Fryer Tops

EASY ON THE ENVIRONMENT • 98% recyclable by weight. • CFC free packaging.

	E7FRGD1B00 371066	E7FRGH2B00 371067
TECHNICAL DATA		
Power supply	Gas	Gas
External dimensions - mm		
width	400	800
depth	730	730
height	250	250
N° of wells	1	2
Usable well dimensions - mm		
width	240	240
depth	380	380
height	235	235
Temperature limiter	•	•
Thermostat range (min-max) - °C	105, 185	105, 185
Maximum Well Capacity -It	5.5, 7	5.5, 7
Power - kW		
gas	7	14
Net weight - kg.	30	60
INCLUDED ACCESSORIES		
BASKET FOR 7 LT FRYERS	1	2
ACCESSORIES		
2 BASKETS FOR 2X5 LT AND 7 LT FRYERS	960638	960638
2 SIDE COVERING PANELS H=250-D=700-ELUX	216277	216277
BASKET FOR 7 LT FRYERS	921608	921608
CHIMNEY UPSTAND 400MM	206303	
CHIMNEY UPSTAND 800MM		206304
DRAUGHT DIVERTER WITH 120 MM DIAMETER	206126	
DRAUGHT DIVERTER WITH 150 MM DIAMETER		206132
FLUE CONDENSER FOR 1 MODULE DIAM.150MM		206246
FLUE CONDENSER FOR 1/2 MOD. DIAM.120MM	206310	
FRONTAL HANDRAIL 1200 MM	216049	216049
FRONTAL HANDRAIL 1600 MM	216050	216050
FRONTAL HANDRAIL 400 MM	216046	
FRONTAL HANDRAIL 800 MM	216047	216047
LARGE HANDRAIL(PORTIONING SHELF)400 MM	216185	216185
LARGE HANDRAIL(PORTIONING SHELF)800 MM	216186	216186
MATCHING RING FOR FLUE CONDENSER 150DIAM		206133
MATCHING RING-FLUE CONDENSER 120-130DIAM	206127	
PRESSURE REGULATOR FOR GAS UNITS	927225	927225
SIDE HANDRAIL-RIGHT/LEFT HAND-700 LINE	206307	206307
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM	206138	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM	206139	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM	206140	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM	206141	206141
SUPPORT FOR "BRIDGE" SYSTEM 400 MM	206154	
SUPPORT FOR "BRIDGE" SYSTEM 800 MM	206137	206137

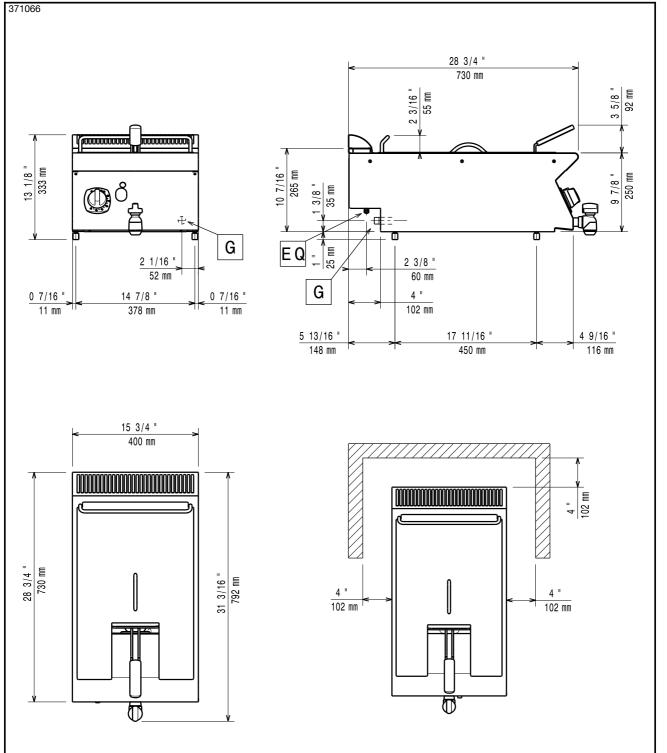

	E7FRGD1B00 371066
LEGEND	
G - Gas connection	1/2"

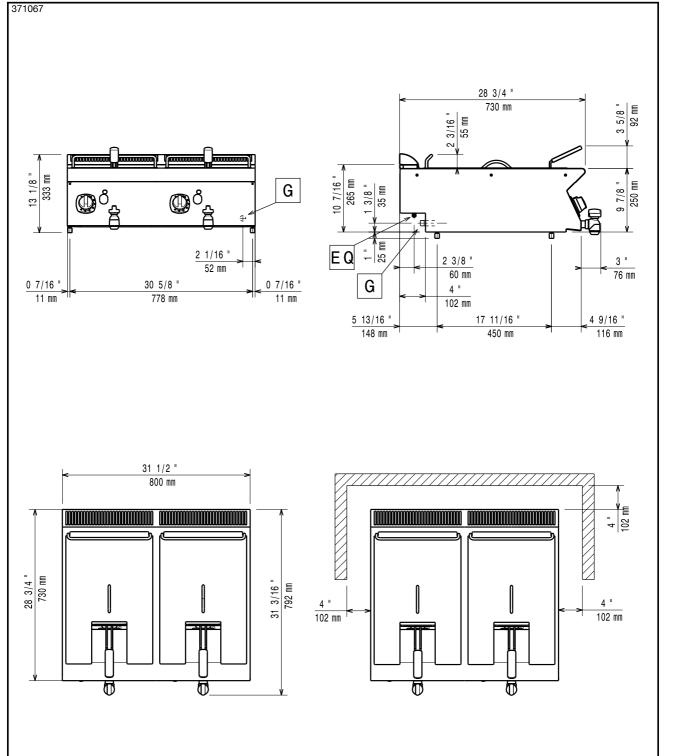

	E7FRGH2B00 371067
LEGEND	
G - Gas connection	1/2"