

900XP

Electric boiling pans - indirect

The 900XP range is designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, 900XP is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed on this sheet are 5 electric cylindrical boiling pans with indirect heating (jacketed) with or without automatic water refilling in the jacket.



391117

EASY TO INSTALL

- Main connections can be accessed below the base of the unit.

EASY TO CLEAN

- The stainless steel well features rounded corners and has a seamless weld joining the bottom plate from the rest of the well for fast, safe and easy cleaning.
- Feet in stainless steel are adjustable up to 50 mm in height.

EASY TO USE

- The Electric Boiling Pan is ideal for cooking, sautéing or poaching all types of produce.
- Incoloy armoured heating elements with safety thermostat,

energy control, temperature limiter and pressure switch are positioned in the jacket cavity base.

- Pressed well in 316L stainless steel guarantees high resistance to the corrosive action of salt and water.
- Deep-drawn well with rounded corners.
- Great reduction of energy consumption thanks to a pressure switch control.
- Safety valve guarantees a working pressure in accordance with regulations.
- Produce is uniformly heated in the base and side walls of the kettle by an indirect heating system that uses integrally generated saturated steam at a temperature of 110°C (0,5 bar

overpressure) in the double-jacket.

- Manometer allows to correctly control the functioning of the pan.
- Solenoid valve to refill with hot and cold water.
- External valve allows to manually evacuate excess air accumulated in the jacket during heating phase.
- No overshooting of cooking temperatures and fast reaction time to temperature setting.
- Large capacity drain tap enables precise portioning of the discharged food, especially small quantities.
- Closing the lid can help to reduce cooking time and save energy costs.
- The depth of the well facilitates stirring and gentle food handling.



Electrolux

900XP
Electric boiling pans - indirect

- Discharge tube and tap are very easy to clean from outside.
- Pressure switch control monitors energy and water consumption.
- One model is available with autoclave lid (391122). The autoclave lid with air insulation in the jacket, endowed with watertight rubber gasket, safety valve and a sturdy stainless steel handle, allows cooking with a slight overpressure (0,05 bar).

EASY TO MAINTAIN

- IPX5 water protection.
- The special design of the control knobs and bezels guarantees against water infiltration.

EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- CFC free packaging.

	E9BSEHINFO 391117	E9BSEHIPFO 391118	E9BSEHIPFR 391119	E9BSEHIRFO 391120	E9BSEHIRFR 391121	E9BSEHIRFC 391122
TECHNICAL DATA						
Power supply	Electric	Electric	Electric	Electric	Electric	Electric
Type of gas burner control						Cock; Thermocouple safety valve; Temperature limiter
External dimensions - mm						
width	800	800	800	800	800	800
depth	930	930	930	930	930	930
height	850	850	850	850	850	850
Height adjustment-inch (-/+)	2 "	2 "	2 "	2 "	2 "	2 "
Net vessel useful capacity - Lt.	60	100	100	145	145	145
Temperature limiter	●	●	●	●	●	●
Double jacketed lid		●	●	●	●	
Vessel dimensions - mm						
diameter	420	600	600	600	600	600
Heating type	Indirect	Indirect	Indirect	Indirect	Indirect	Indirect
Power - kW						
installed-electric	9.4	21.5	21.5	21.5	21.5	21.5
Net weight - kg.	115	135	135	135	135	145
Supply voltage	400 V, 3N, 50/60	400 V, 3N, 50/60	400 V, 3N, 50/60	400 V, 3N, 50/60	400 V, 3N, 50/60	400 V, 3N, 50/60
Autoclave						●
Automatic refill			●		●	
INCLUDED ACCESSORIES						
WATER ADDITIVE AGAINST CORROSION	1	1	1	1	1	1
ACCESSORIES						
1-SECTION NOODLE BASKET FOR 60 LT PANS	921626					
2 PANELS FOR SERVICE DUCT (BACK TO BACK)	206202	206202	206202	206202	206202	206202
2 PANELS FOR SERVICE DUCT (SINGLE INST.)	206181	206181	206181	206181	206181	206181
2 SIDE COVERING PANELS H=700 D=900-ELUX	216134	216134	216134	216134	216134	
2 SIDE COVERING PANELS H=700-D=900-Z/OEM						206335
2 SIDE KICKING STRIPS - 900 LINE	206180	206180	206180	206180	206180	206180
2-SECTION NOODLE BASKET FOR 100 LT PANS		925093	925093			
2-SECTION NOODLE BASKET FOR 150 LT PANS				206123	206123	206123
4 FEET FOR CONCRETE INSTALLATION	206210	206210	206210	206210	206210	206210
4 WHEELS (2 WITH BRAKE)	206188	206188	206188	206188	206188	206188
CHIMNEY UPSTAND 800MM	206304	206304	206304	206304	206304	206304
FLANGED FEET KIT	206136	206136	206136	206136	206136	206136
FRONT.KICK.STRIP F.CONCRETE INST.1000 MM	206150	206150	206150	206150	206150	206150
FRONT.KICK.STRIP F.CONCRETE INST.1200 MM	206151	206151	206151	206151	206151	206151
FRONT.KICK.STRIP F.CONCRETE INST.1600 MM	206152	206152	206152	206152	206152	206152
FRONT.KICK.STRIP F.CONCRETE INST.200 MM						206146
FRONT.KICK.STRIP F.CONCRETE INST.400 MM						206147
FRONT.KICK.STRIP F.CONCRETE INST.800 MM	206148	206148	206148	206148	206148	206148
FRONTAL KICKING STRIP 1000 MM	206177	206177	206177	206177	206177	206177
FRONTAL KICKING STRIP 1200 MM	206178	206178	206178	206178	206178	206178
FRONTAL KICKING STRIP 1600 MM	206179	206179	206179	206179	206179	206179
FRONTAL KICKING STRIP 200 MM						206174
FRONTAL KICKING STRIP 400 MM						206175
FRONTAL KICKING STRIP 800 MM	206176	206176	206176	206176	206176	206176
JUNCTION SEALING KIT	206086	206086	206086	206086	206086	206086
KIT AUTOM.DEPRESS.JACKET-100/150L BOIL.P		206279	206279	206279	206279	206279
WATER ADDITIVE AGAINST CORROSION	927222	927222	927222	927222	927222	927222
WATER COLUMN WITH SWIVEL ARM	206289	206289	206289	206289	206289	


CILB010

2012-07-26

Subject to change without notice

900XP
Electric boiling pans - indirect

391117

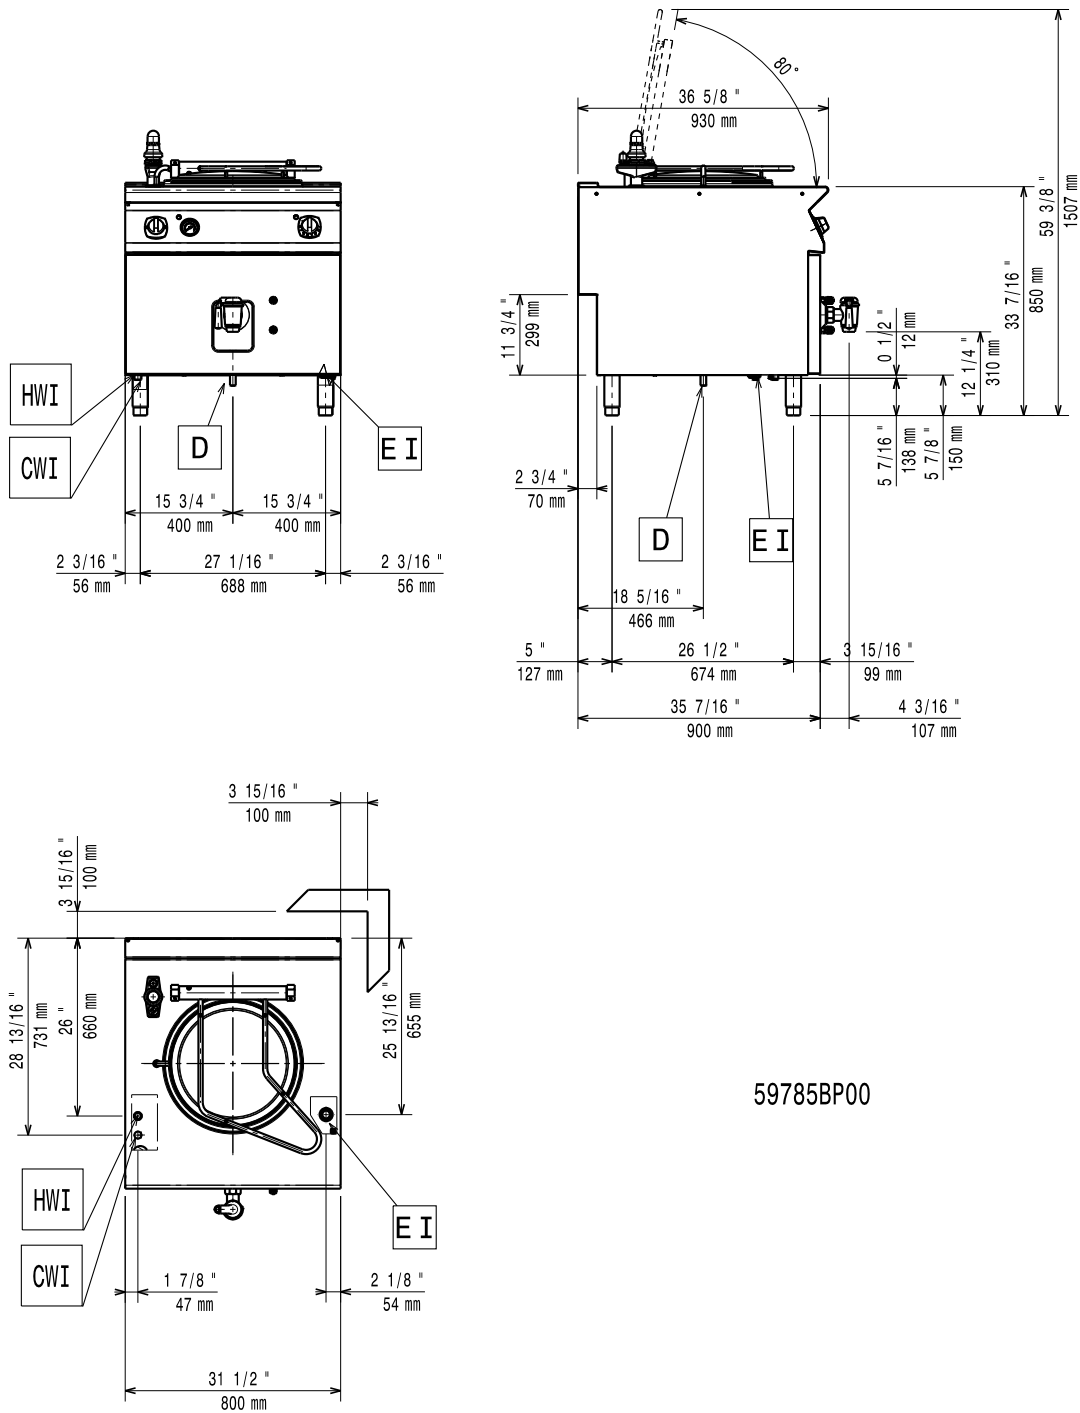

59785BP00

LEGEND		E9BSEHINFO 391117
CWI - Cold water inlet		3/4"
D - Water drain		1"1/2"
EI - Electrical connection		400 V, 3N, 50/60
HWI - Hot water inlet		3/4"


CILB010

2012-07-26

Subject to change without notice

900XP
Electric boiling pans - indirect

391118

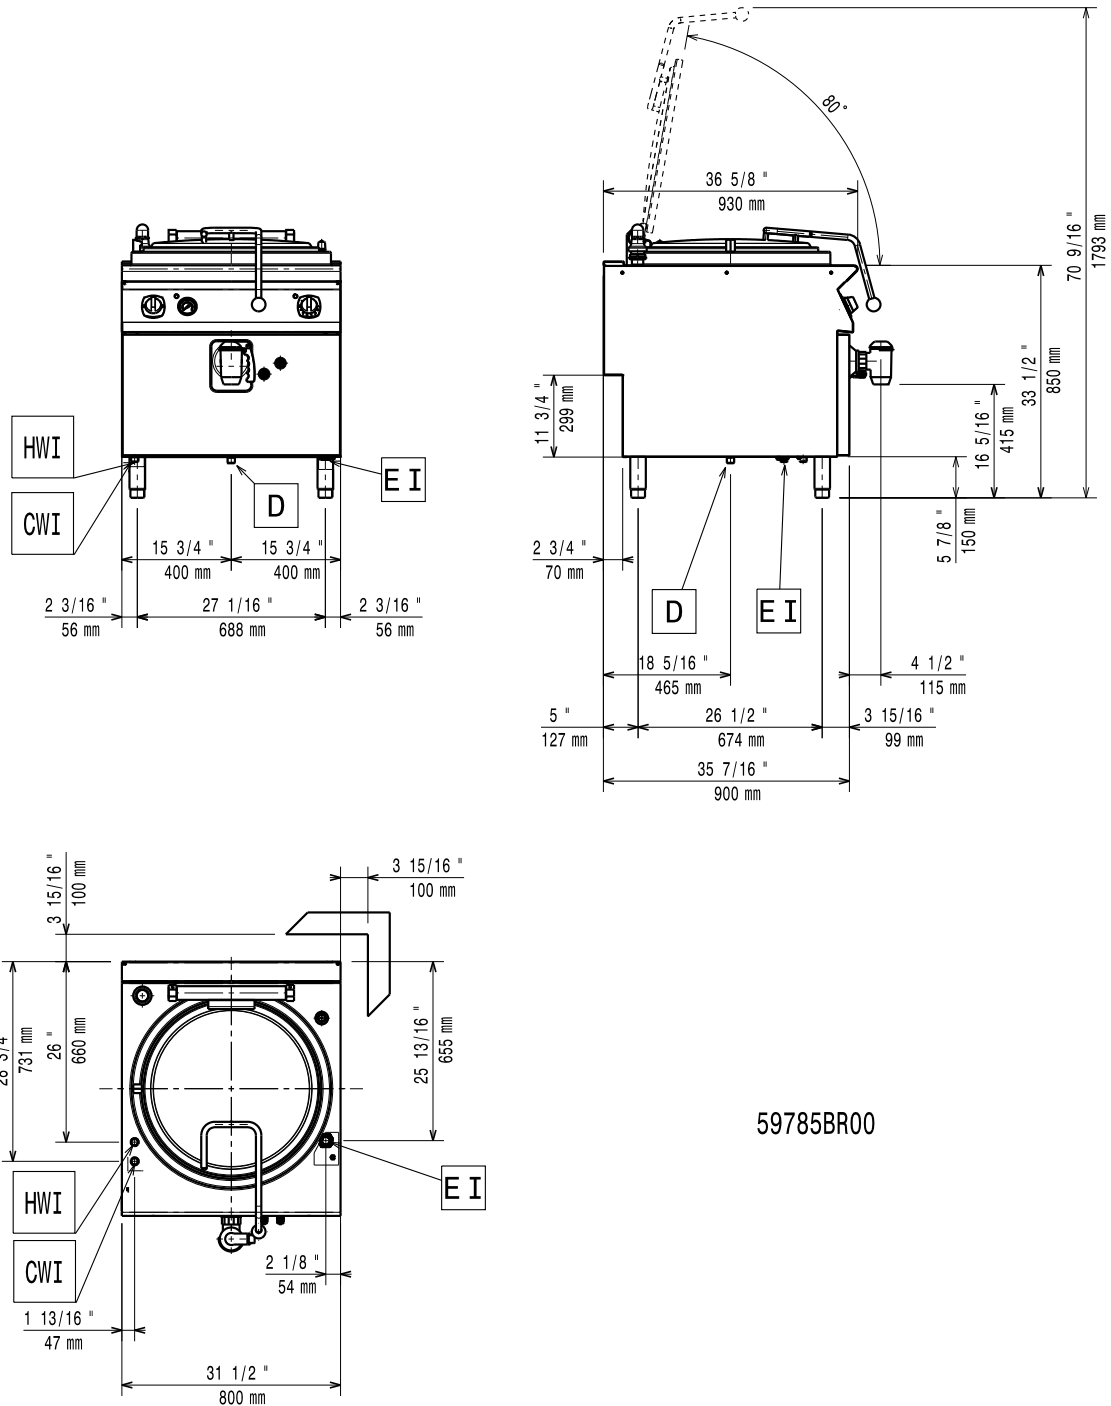

59785BR00

LEGEND		E9BSEHIPF0 391118
CWI - Cold water inlet		3/4"
D - Water drain		2"
EI - Electrical connection		400 V, 3N, 50/60
HWI - Hot water inlet		3/4"


CILB010

2012-07-26

Subject to change without notice

900XP
Electric boiling pans - indirect

391119

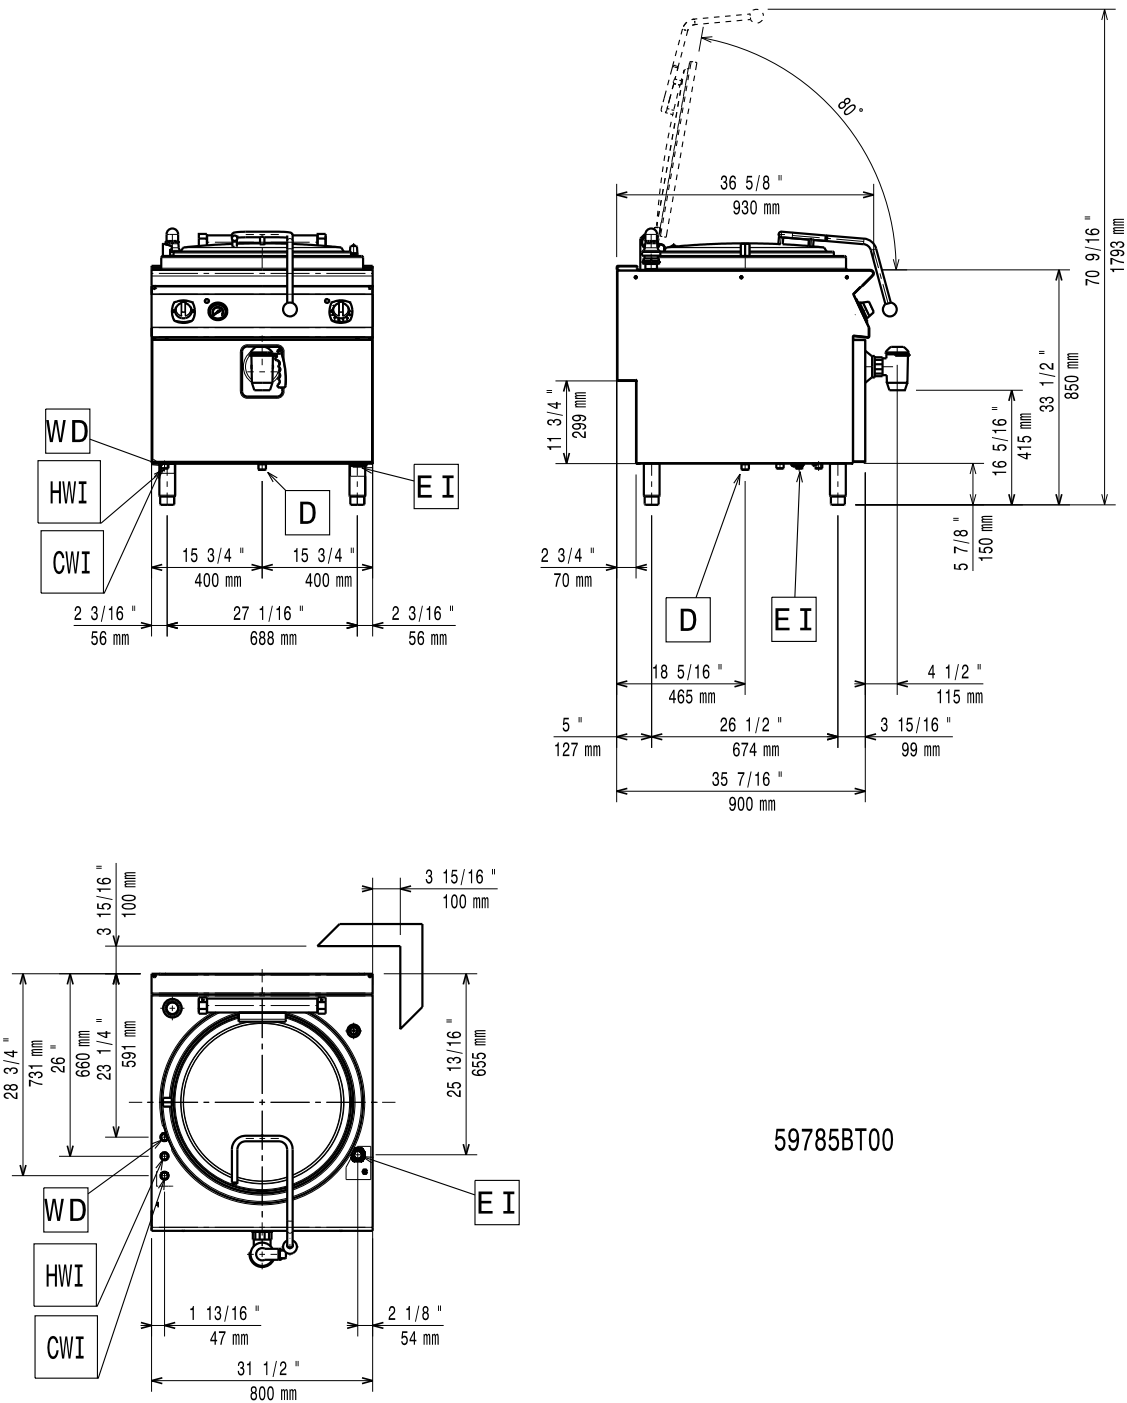

59785BT00

LEGEND		E9BSEHIPFR 391119
CWI - Cold water inlet		3/4"
D - Water drain		2"
EI - Electrical connection		400 V, 3N, 50/60
HWI - Hot water inlet		3/4"


CILB010

2012-07-26

Subject to change without notice

900XP
Electric boiling pans - indirect

391120

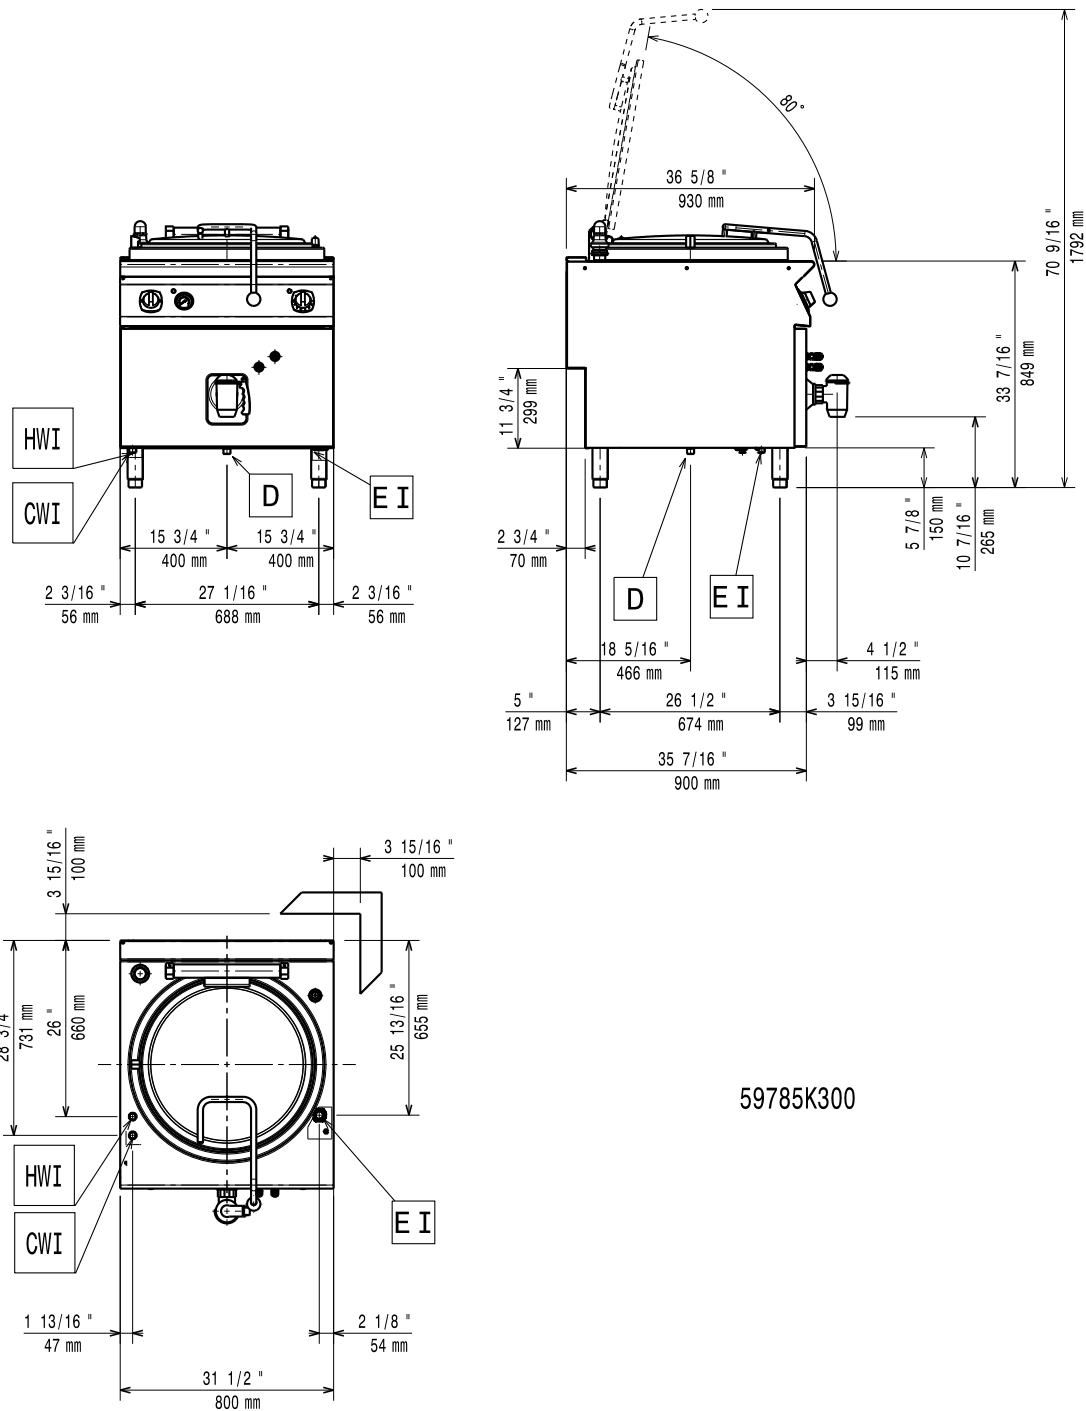

59785K300

LEGEND		E9BSEHIRFO 391120
CWI - Cold water inlet		3/4"
D - Water drain		2"
EI - Electrical connection		400 V, 3N, 50/60
HWI - Hot water inlet		3/4"


CILB010

2012-07-26

Subject to change without notice

900XP
Electric boiling pans - indirect

391122

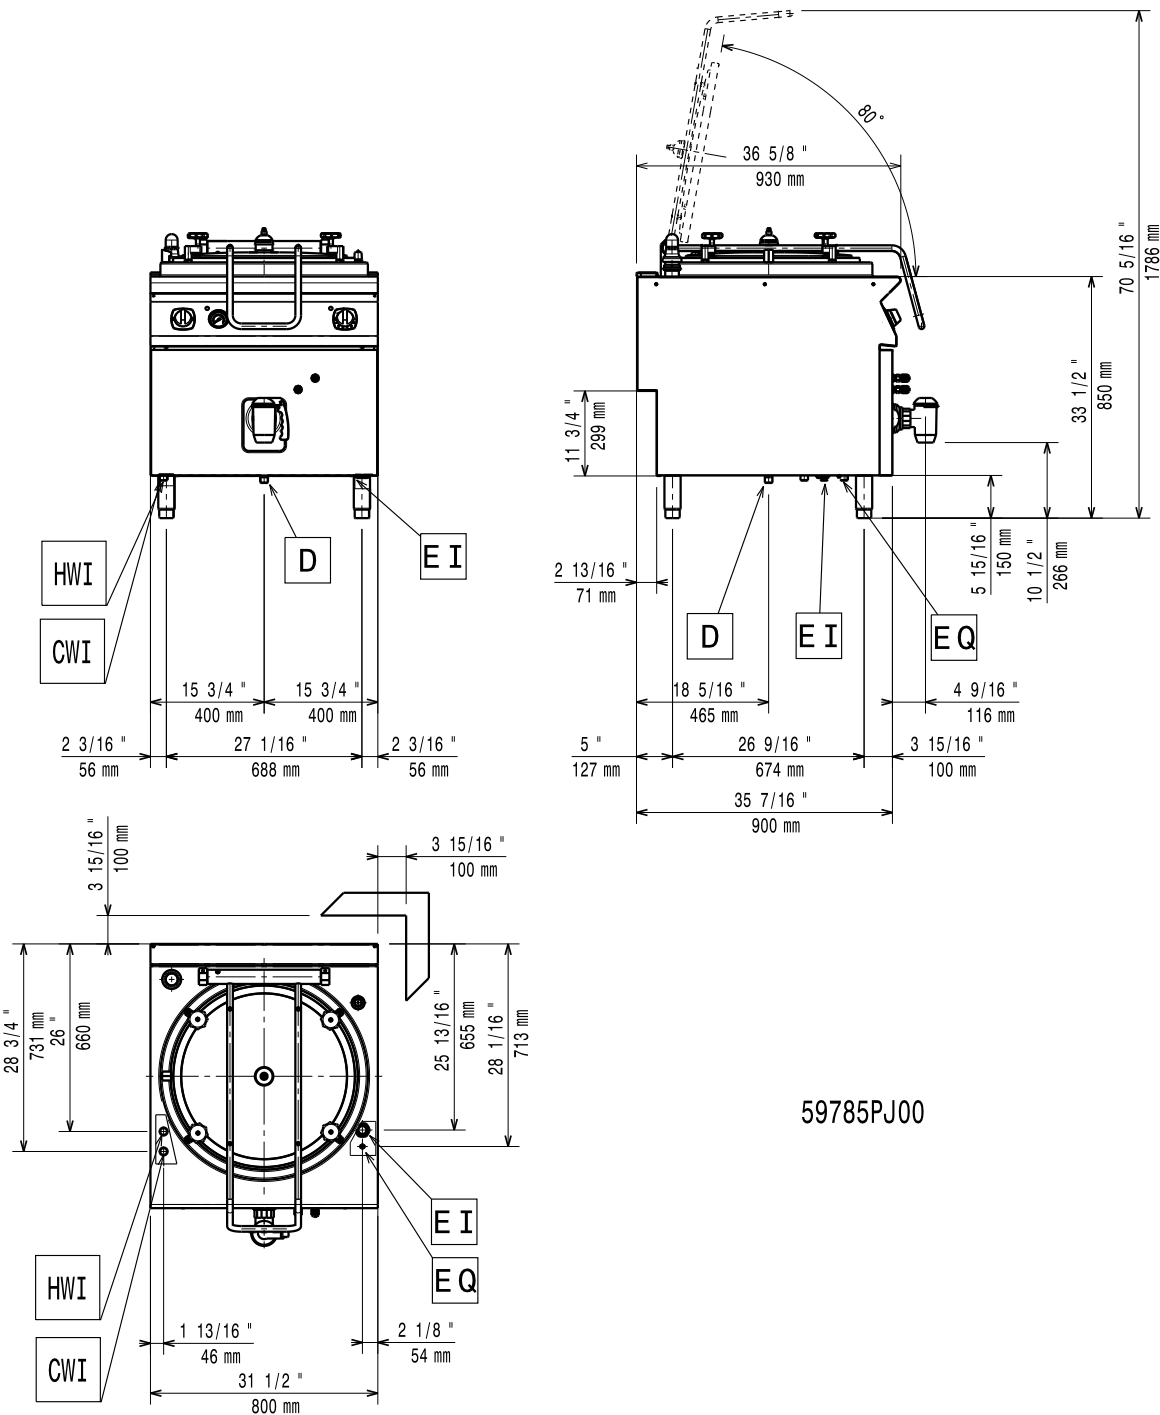

59785PJ00

CILB010

2012-07-26

Subject to change without notice

LEGEND		E9BSEHIRFC 391122
CWI - Cold water inlet		3/4"
D - Water drain		2"
EI - Electrical connection		400 V, 3N, 50/60
HWI - Hot water inlet		3/4"