100It Electric Braising Pans-Duomat

The 900XP range is designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, 900XP is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed in this sheet are 100 litre electric braising pans with **Duomat** cooking surface.



391150

EASY TO INSTALL

 Main connections can be accessed below the base of the

EASY TO CLEAN

- Well and double skinned lid in stainless steel. Exterior panels in stainless steel with Scotch Brite finish.
- · The stainless steel well features rounded corners and has a seamless weld joining the bottom plate from the rest of the well for fast, safe and easy cleaning.
- Feet in stainless steel are adjustable up to 50 mm in height.

EASY TO USE

· Infrared heating elements positioned beneath the cooking surface guarantee uniform

heat distribution.

- The heating elements are built-in to the base of the well move together with the well during tilting for better cleaning and for the highest safety conditions.
- Thermostatically controlled temperature from 120°C to 300°C.
- Bratt pans with **Duomat** cooking surface: a 10 mm-thick alloy obtained by combining two different stainless steels to improve the thermal stability of the cooking surface, allow for a more multifunctional use of the bratt pan (dry and wet cooking can be performed alternatively) and ensure a higher resistance to
- · High- precision manual tilting system and pouring lip

facilitate the emptying of the contents in the well.

EASY TO MAINTAIN

- IPX5 water protection.
- The special design of the control knobs and bezels guarantees against water infiltration.
- · One control knob operating as cooking temperature regulator as well as energy control device.

EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- · CFC free packaging.









| | E9BREJDPF0 391149 | E9BREJDPFM 391150 |
|--|----------------------|----------------------|
| TECHNICAL DATA | | |
| Power supply | Electric | Electric |
| External dimensions - mm | | |
| width | 1000 | 1000 |
| depth | 930 | 930 |
| height | 850 | 850 |
| height adjustment | 50 | 50 |
| Cooking surface | | |
| material | Duomat | Duomat |
| Temperature limiter | • | • |
| Maximum Well Capacity -It | 100 | 100 |
| Power - kW | | |
| installed-electric | 17 | 17 |
| Net weight - kg. | 180 | 180 |
| Supply voltage | 400 V, 3N, 50/60 | 400 V, 3N, 50/60 |
| Automatic tilting | | • |
| ACCESSORIES | | |
| 2 PANELS FOR SERVICE DUCT (BACK TO BACK) | 206202 | 206202 |
| 2 PANELS FOR SERVICE DUCT (SINGLE INST.) | 206181 | 206181 |
| 2 SIDE KICKING STRIPS - 900 LINE | 206180 | 206180 |
| CHIMNEY UPSTAND 1000MM | 206305 | 206305 |
| FLANGED FEET KIT | 206136 | 206136 |
| FRONTAL KICKING STRIP 1000 MM | 206177 | 206177 |
| FRONTAL KICKING STRIP 1200 MM | 206178 | 206178 |
| FRONTAL KICKING STRIP 1600 MM | 206179 | 206179 |



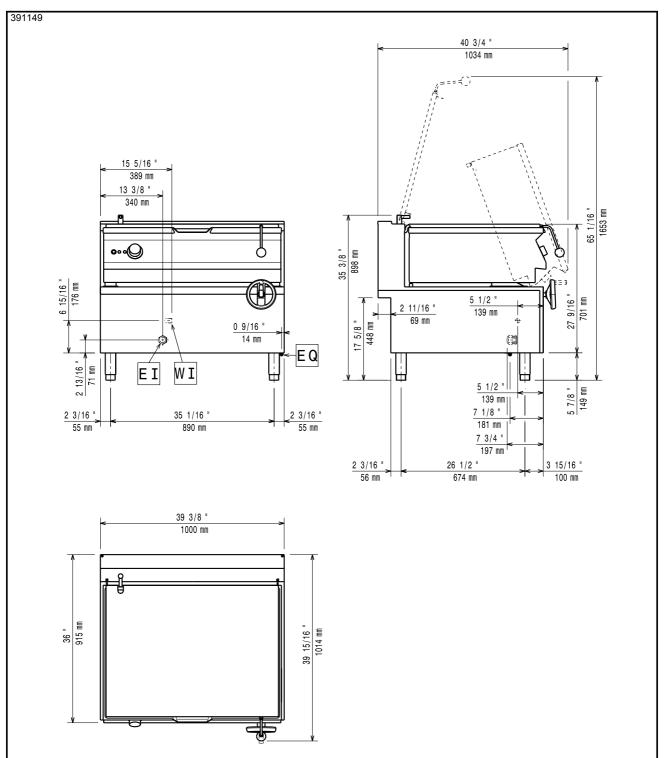

| | E9BREJDPF0 391149 |
|----------------------------|----------------------|
| LEGEND | |
| CWI - Cold water inlet | 3/4" |
| EI - Electrical connection | 400 V, 3N, 50/60 |

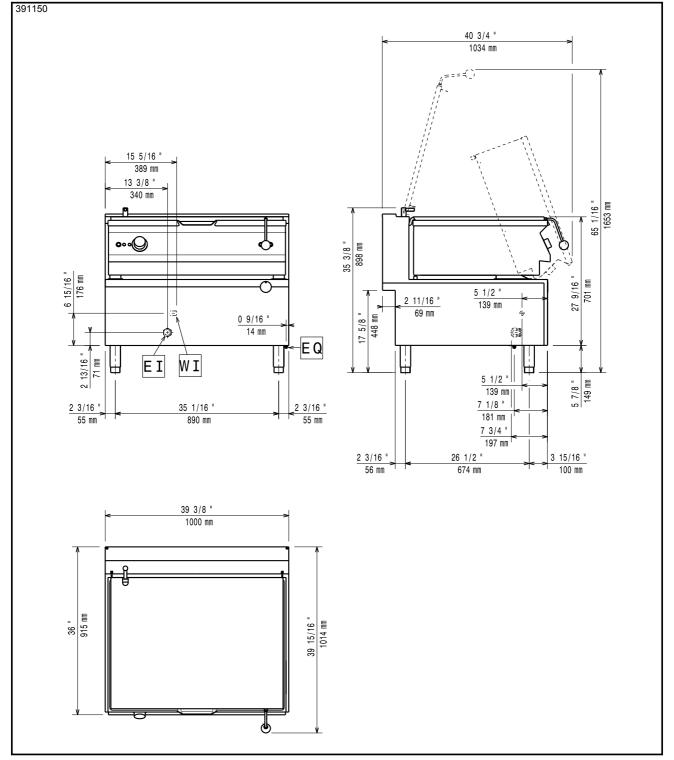

| | E9BREJDPFM 391150 |
|----------------------------|----------------------|
| LEGEND | |
| CWI - Cold water inlet | 3/4" |
| EI - Electrical connection | 400 V, 3N, 50/60 |