

Chip scuttle

The 900XP range is designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, 900XP is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The model detailed in this sheet is a chip scuttle.



391098

EASY TO INSTALL

- Main connections can be accessed via the bottom or rear of the unit.
- Access to all components from the front.
- Can be mounted on table tops, open base cupboards bridging or cantilever supports.

EASY TO CLEAN

- One piece pressed worktop in 2 mm stainless steel with smooth, rounded corners.
- Exterior panels in stainless steel with Scotch Brite finish.
- Right-angled, laser cut side edges to allow flush-fitting joins between units eliminating gaps and possible dirt traps.

EASY TO USE

- The chip scuttle is typically indicated for use next to a fryer. After the food has been fried, it is placed in the well on perforated plate (provided as standard) that allows the excess oil to drip into the well basin. This guarantees that the food remains perfectly crisp and dry. An infrared lamp directly above the unit maintains the temperature of fried food until it is ready to be plated and served.
- Easy-to-use control panel.
- ON/OFF switch.
- Well suitable to contain a 1/1 GN container with a maximum height of 150 mm.
- Supplied as standard with a 1/1 GN perforate false bottom specially shaped to facilitate the scooping or collection of food.

- Heating via infrared element positioned on the back of the unit.


EASY TO MAINTAIN

- IPX5 water protection.
- The special design of the control knobs and bezels guarantees against water infiltration.

EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- CFC free packaging.

391098

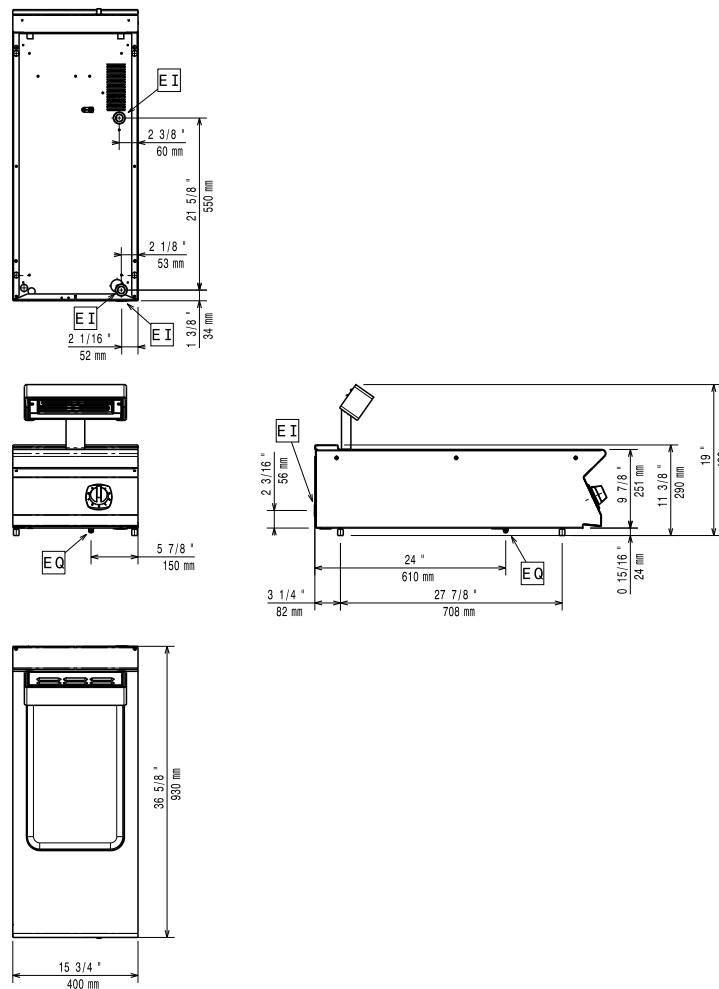

900XP

Chip scuttle

CIPA010

2012-07-26

Subject to change without notice

	E9CSPDC000 391098
LEGEND	
EI - Electrical connection	230 V, 1N, 50/60
TECHNICAL DATA	
Configuration	Free Standing
External dimensions - mm	
width	400
depth	930
height	250
Usable well dimensions - mm	
width	306
depth	510
height	156
Power - kW	
installed-electric	1
Net weight - kg.	28
Supply voltage	230 V, 1N, 50/60
ACCESSORIES	
2 SIDE COVERING PANELS H=250-D=900-ELUX	216278
CHIMNEY UPSTAND 400MM	206303
FRONTAL HANDRAIL 1200 MM	216049
FRONTAL HANDRAIL 1600 MM	216050
FRONTAL HANDRAIL 400 MM	216046
FRONTAL HANDRAIL 800 MM	216047
JUNCTION SEALING KIT	206086
LARGE HANDRAIL(PORTIONING SHELF)400 MM	216185
LARGE HANDRAIL(PORTIONING SHELF)800 MM	216186
SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE	216044
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM	206141
SUPPORT FOR "BRIDGE" SYSTEM 400 MM	206154
SUPPORT FOR "BRIDGE" SYSTEM 800 MM	206137
WATER COLUMN WITH SWIVEL ARM	206289