

900XP

18 liter electric fryers

The 900XP range is designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, 900XP is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed in this sheet are 18 liter electric fryers.



391095

EASY TO INSTALL

- Main connections can be accessed via the bottom of the unit.
- Access to all components from the front.

EASY TO CLEAN

- One piece pressed worktop in 2 mm stainless steel with smooth, rounded corners.
- Exterior panels in stainless steel with Scotch Brite finish.
- Right-angled, laser cut side edges to allow flush-fitting joins between units eliminating gaps and possible dirt traps.
- Oil drainage via a tap with push and turn safety mechanism.
- Feet in stainless steel are adjustable up to 50 mm in height.

EASY TO USE

- The electric fryer is ideal for kitchens needing a fast and easy to use appliance capable of cooking numerous portions time after time.
- Swivelling incoloy armoured heating elements in the cooking well can be easily tilted up to facilitate well cleaning operations.
- Thermostatic regulation of oil temperature from 105°C to 185°C.
- Overheat safety thermostat.
- The units are supplied, as standard, with 2 half baskets for each well.

EASY TO MAINTAIN

- IPX5 water protection.
- The special design of the control knobs and bezels guarantees against water infiltration.

EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- CFC free packaging.



Electrolux

900XP
18 liter electric fryers

	E9FRED1HF0 391094	E9FREH2HF0 391095	E9FRED1HFN 391178	E9FREH2HFN 391179
TECHNICAL DATA				
Power supply	Electric	Electric	Electric	Electric
Installation	FS on concrete base; FS on feet	FS on concrete base; FS on feet	FS on concrete base; FS on feet	FS on concrete base; FS on feet
Configuration	Free Standing	Free Standing	Free Standing	Free Standing
Capacity - lt.	20	20	20	20
External dimensions - mm				
width	400	800	400	800
External dimensions - inch				
width	15 3/4"	31 1/2"	15 3/4"	31 1/2"
External dimensions - mm				
depth	930	930	930	930
height	850	850	850	850
External dimensions - mm				
height adjustment	50	50	50	50
N° of wells	1	2	1	2
Usable well dimensions - mm				
width	340	340	340	340
depth	400	400	400	400
height	290	290	290	290
Number of baskets	2	4	2	2
Temperature limiter	●	●	●	●
Thermostat range (min-max) - °C	105, 185	105, 185	105, 185	105, 185
Thermostat range/max - °F	365	365	365	365
Thermostat range/min - °F	221	221	221	221
Maximum Well Capacity -lt	18, 20	18, 20	18, 20	18, 20
Control Knob	Electrical thermostat			
Power - kW				
installed-electric	16.5	33	16.5	33
Net weight - kg.	57	115	57	115
Supply voltage	400 V, 3N, 50/60	400 V, 3N, 50/60	230 V, 3, 50/60	230 V, 3, 50/60
INCLUDED ACCESSORIES				
2 HALF SIZE BASKETS FOR 18/23LT FRYERS	1	2	1	2
DOOR FOR OPEN BASE CUPBOARD-ELUX	1	2	1	2
ACCESSORIES				
1 FULL SIZE BASKET FOR 18/23LT FRYERS	927226	927226	927226	927226
2 HALF SIZE BASKETS FOR 18/23LT FRYERS	927223	927223	927223	927223
2 PANELS FOR SERVICE DUCT (BACK TO BACK)	206202	206202	206202	206202
2 PANELS FOR SERVICE DUCT (SINGLE INST.)	206181	206181	206181	206181
2 SIDE COVERING PANELS H=700 D=900-ELUX	216134	216134	216134	216134
2 SIDE KICKING STRIPS - 900 LINE	206180	206180	206180	206180
2 SIDE KICKING STRIPS-CONCRETE INST-900	206157	206157	206157	206157
4 FEET FOR CONCRETE INSTALLATION	206210	206210	206210	206210
4 WHEELS (2 WITH BRAKE)		206188		206188
CHIMNEY UPSTAND 400MM	206303		206303	
CHIMNEY UPSTAND 800MM		206304		206304
DOOR FOR OPEN BASE CUPBOARD-ELUX	206350	206350	206350	206350
FLANGED FEET KIT	206136	206136	206136	206136
FRONT.KICK.STRIP F.CONCRETE INST.1000 MM	206150	206150	206150	206150
FRONT.KICK.STRIP F.CONCRETE INST.1200 MM	206151	206151	206151	206151
FRONT.KICK.STRIP F.CONCRETE INST.1600 MM	206152	206152	206152	206152
FRONT.KICK.STRIP F.CONCRETE INST.400 MM	206147		206147	
FRONT.KICK.STRIP F.CONCRETE INST.800 MM	206148	206148	206148	206148
FRONTAL HANDRAIL 1200 MM	216049	216049	216049	216049
FRONTAL HANDRAIL 1600 MM	216050	216050	216050	216050
FRONTAL HANDRAIL 400 MM	216046		216046	
FRONTAL HANDRAIL 800 MM	216047	216047	216047	216047
FRONTAL KICKING STRIP 1000 MM	206177	206177	206177	206177
FRONTAL KICKING STRIP 1200 MM	206178	206178	206178	206178
FRONTAL KICKING STRIP 1600 MM	206179	206179	206179	206179
FRONTAL KICKING STRIP 400 MM	206175		206175	
FRONTAL KICKING STRIP 800 MM	206176	206176	206176	206176
JUNCTION SEALING KIT	206086	206086	206086	206086
LARGE HANDRAIL(PORIONING SHELF)400 MM	216185	216185	216185	216185
LARGE HANDRAIL(PORIONING SHELF)800 MM	216186	216186	216186	216186
OIL FILTER FOR FRYERS - 900 LINE	206359	206359	206359	206359
SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE	216044	216044	216044	216044
UNCLOGGING ROD F.23LT FRYER DRAIN.PIPE	927227	927227	927227	927227
WATER COLUMN WITH SWIVEL ARM	206289	206289	206289	206289


CINF010

2012-07-26

Subject to change without notice

900XP
18 liter electric fryers


391094, 391179, 391178

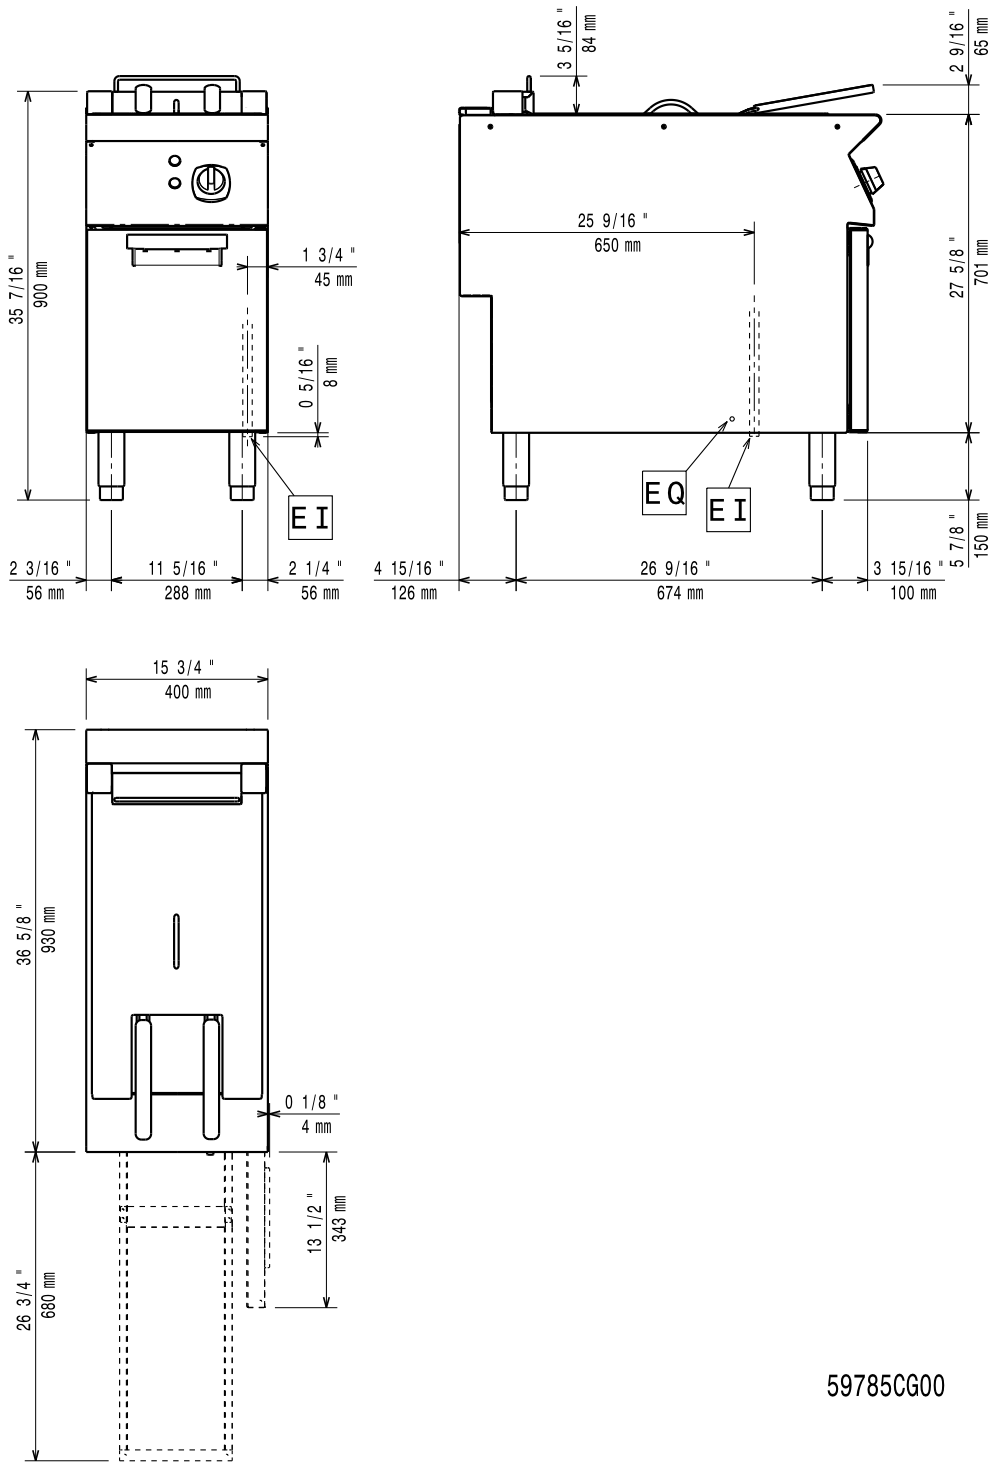

LEGEND	E9FRED1HF0 391094	E9FRED1HFN 391178	E9FRED2HFN 391179
EI - Electrical connection	400 V, 3N, 50/60	230 V, 3, 50/60	230 V, 3, 50/60

900XP
18 liter electric fryers

391095

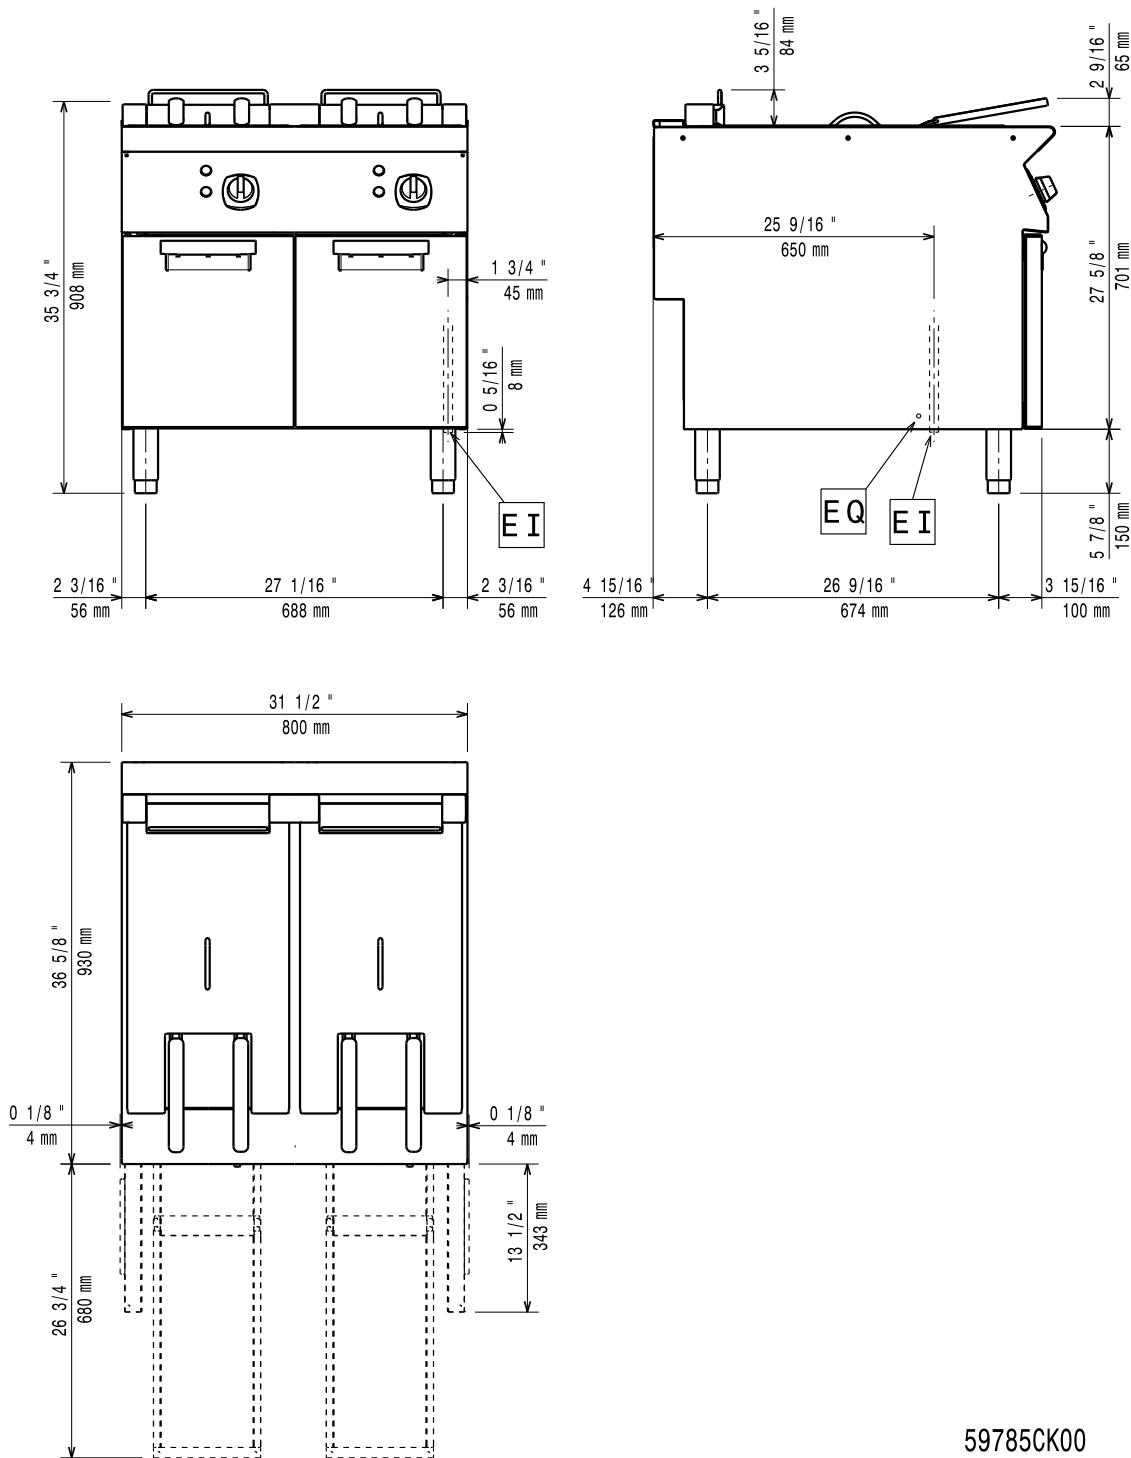

CINF010

2012-07-26

Subject to change without notice

LEGEND EI - Electrical connection	E9FREH2HF0 391095
	400 V, 3N, 50/60