23 liter gas fryers - electronic

The 900XP range is designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, 900XP is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed in this sheet are 23 liter gas fryers with electronic control.



391082

EASY TO INSTALL

- Main connections are accessible from below the base of the unit.
- Access to all components from the front
- Provided with a service duct to facilitate installation and can be mounted on feet.

EASY TO CLEAN

- Deep drawn V-Shaped well with rounded corners and external heating elements for safe and easy cleaning.
- One piece pressed worktop in 2 mm stainless steel with smooth, rounded corners.
- Exterior panels in stainless steel with Scotch Brite finish.
- Right-angled, laser cut side edges to allow flush-fitting joins

between units eliminating gaps and possible dirt traps.

- Oil drainage via a tap into a drainage container positioned under the well thus simplifying the consumed oil management and guaranteeing the operator safety.
- Feet in stainless steel are adjustable up to 50 mm in height.

EASY TO USE

• The freestanding electronic fryer with deep-drawn V-Shaped well is ideal for kitchens needing a versatile, efficient and easy to clean unit that can guarantee high quality cooking results. The V-Shaped well is equipped with high efficiency external gas burners guaranteeing a longer oil life (compared to fryers with

burners inside the well) as well as a uniform distribution of heat. The electronic programmability makes this unit a must for any kitchen wanting to standardize their cooking procedures.

- Digital control (push button) function): cooking temperature set; cooking time set; main switch; set actual temperature switch; store cooking program and automatic oil filtration plus refill system on model 391082.
- Stainless steel burners with optimized combustion, flame failure device and protected pilot
- The V-Shaped well is made from two pieces of pressed stainless steel that are seamlessly welded together for maximum hygiene, safety and reliability.







- Overheat safety thermostat.
- Melting function allows to safely heat-up solid shortening which is used to fry products.
- Piezo spark ignition for added safety.
- All gas appliances are supplied for use with natural gas or LPG. Conversion jets supplied as standard.

EASY TO MAINTAIN


• The special design of the control knobs and bezels guarantees against water infiltration.

EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- CFC free packaging.


| | E9FRGD1JFE 391081 | E9FRGD1JFO 391082 |
|---|---------------------------------|----------------------|
| TECHNICAL DATA | | |
| Power supply | Gas | Gas |
| Installation | FS on concrete base; FS on feet | feet |
| Configuration | Free Standing | Free Standing |
| External dimensions - mm | | |
| width | 400 | 400 |
| depth | 930 | 930 |
| height | 1200 | 1200 |
| height adjustment | 50 | 50 |
| N° of wells | 1 | 1 |
| Usable well dimensions - mm | | |
| width | 340 | 340 |
| depth | 400 | 400 |
| height | 575 | 575 |
| Thermostatic | • | • |
| Thermocople safety valve | • | • |
| Temperature limiter | • | |
| Maximum Well Capacity -It | 21, 23 | 21, 23 |
| Power - kW | | |
| gas | 25 | 25 |
| auxiliary | 0.03 | 0.03 |
| Net weight - kg. | 86 | 86 |
| Supply voltage | 230 V, 1N, 50/60 | 230 V, 1N, 50/60 |
| Oil filtering | | • |
| INCLUDED ACCESSORIES | | |
| 2 HALF SIZE BASKETS FOR 18/23LT FRYERS | 1 | 1 |
| DOOR FOR OPEN BASE CUPBOARD-ELUX | 1 | 1 |
| OIL FILTER FOR FRYERS | 1 | 1 |
| ACCESSORIES | | |
| 1 FULL SIZE BASKET FOR 18/23LT FRYERS | 927226 | 927226 |
| 2 HALF SIZE BASKETS FOR 18/23LT FRYERS | 927223 | 927223 |
| 2 SIDE COVERING PANELS H=700 D=900-ELUX | 216134 | 216134 |
| 2 SIDE KICKING STRIPS - 900 LINE | 206180 | 206180 |
| CHIMNEY UPSTAND 400MM | 206303 | 206303 |
| DEFLECTOR FOR FLOURED PRODUCTS-23L FRYER | 960645 | 960645 |
| DOOR FOR OPEN BASE CUPBOARD-ELUX | 206350 | 206350 |
| DRAUGHT DIVERTER WITH 120 MM DIAMETER | 206126 | 206126 |
| EXTENSION FOR OIL DRAINAGE | 206209 | 206209 |
| FLANGED FEET KIT | 206136 | 206136 |
| FLUE CONDENSER FOR 1/2 MOD. DIAM.120MM | 206310 | 206310 |
| FRONT KICKING STRIP(2PARTS)FOR 23L FRYER | 206203 | 200010 |
| FRONTAL HANDRAIL 1200 MM | 216049 | 216049 |
| FRONTAL HANDRAIL 1600 MM | 216050 | 216050 |
| FRONTAL HANDRAIL 400 MM | 216046 | 216046 |
| FRONTAL HANDRAIL 800 MM | 216047 | 216047 |
| HYGIENIC LID FOR 23 LT FRYERS | 210071 | 206201 |
| JUNCTION SEALING KIT | 206086 | 206086 |
| LARGE HANDRAIL(PORTIONING SHELF)400 MM | 216185 | 216185 |
| LARGE HANDRAIL(PORTIONING SHELF)800 MM | 216186 | 216186 |
| MATCHING RING-FLUE CONDENSER 120-130DIAM | 206127 | 206127 |
| OIL FILTER FOR FRYERS | 206127 | 206143 |
| OIL FILTER FOR FRYERS - 900 LINE | 206359 | 206359 |
| PRESSURE REGULATOR FOR GAS UNITS | 927225 | 927225 |
| SEDIMENT TRAY FOR 23 LT FRYER | 206173 | 206173 |
| SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE | 216044 | 216044 |
| | | |
| UNCLOGGING ROD F.23LT FRYER DRAIN.PIPE WATER COLUMN WITH SWIVEL ARM | 927227 | 927227 |
| WATER COLUMN WITH SWIVEL ARM | 206289 | 206289 |

900XP 23 liter gas fryers - electronic

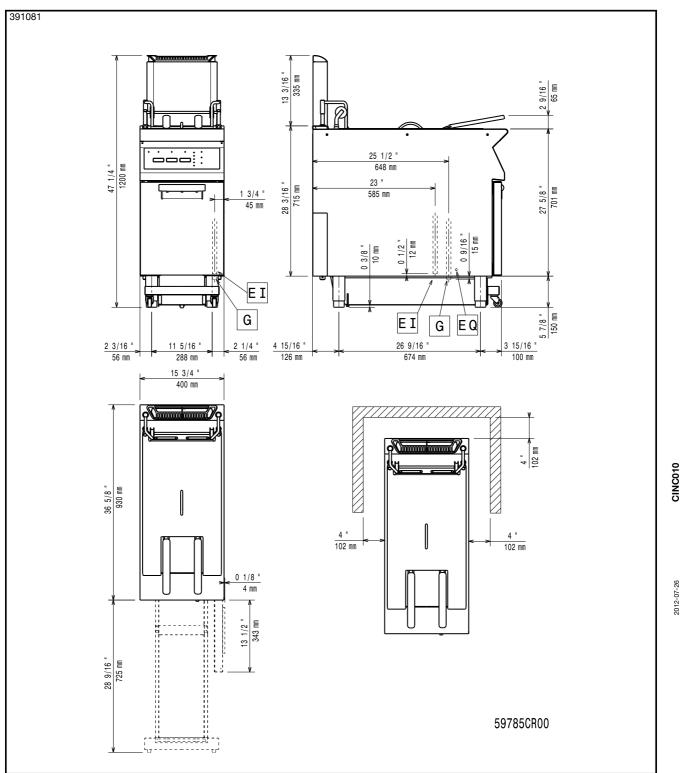

| | E9FRGD1JFE 391081 |
|----------------------------|----------------------|
| LEGEND | |
| El - Electrical connection | 230 V, 1N, 50/60 |
| G - Gas connection | 3/4" |

900XP 23 liter gas fryers - electronic

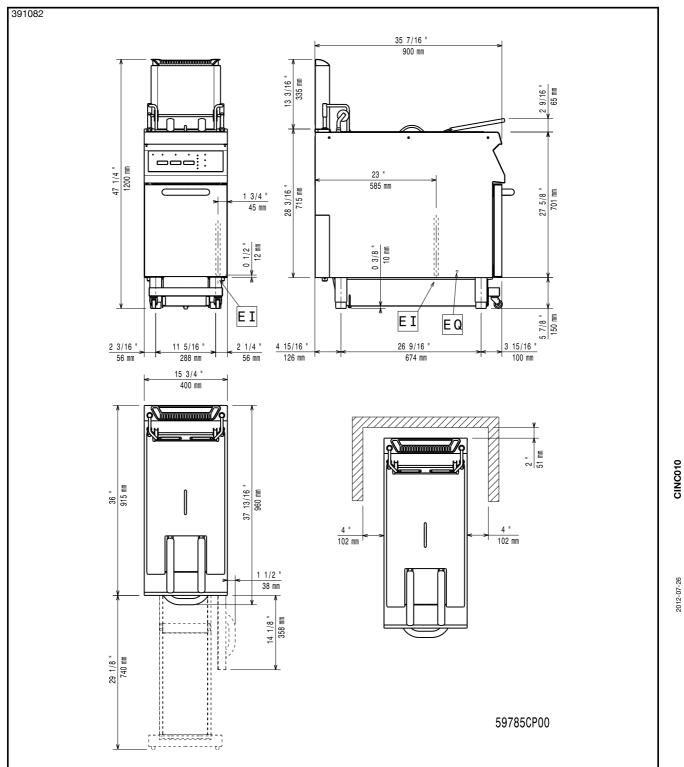

| | E9FRGD1JFO 391082 |
|----------------------------|----------------------|
| LEGEND | |
| El - Electrical connection | 230 V, 1N, 50/60 |
| G - Gas connection | 3/4" |