


900XP

Gas solid top

The 900XP range is designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, 900XP is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The model detailed in this sheet is a gas solid top in full module version.

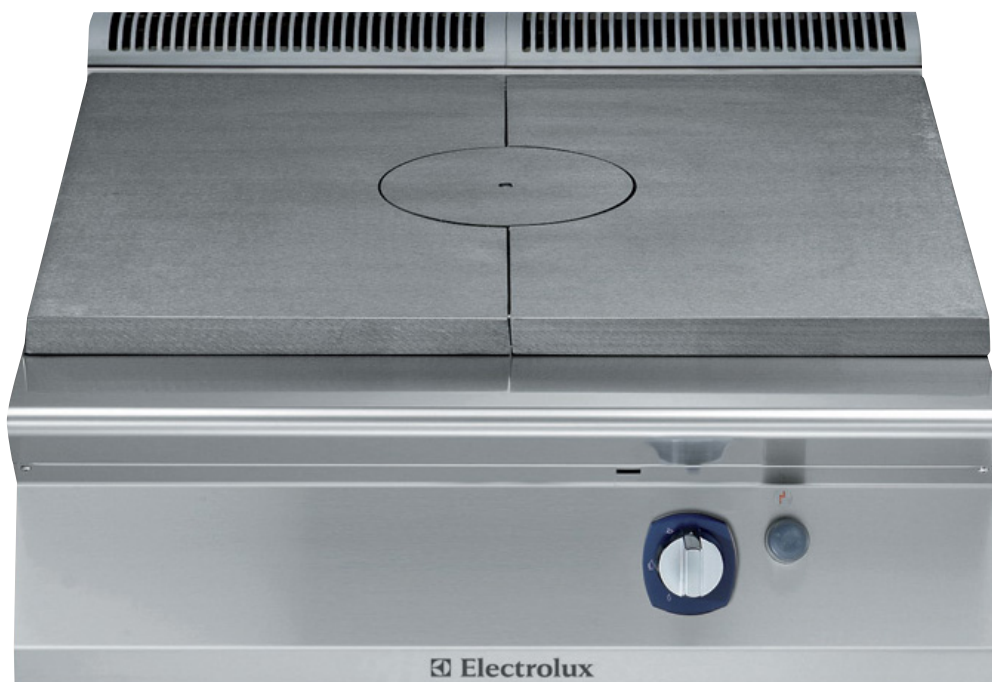

391018

EASY TO INSTALL

- Main connections can be accessed via the bottom or rear of the unit.
- Access to all components from the front.
- Can be mounted on table tops, open base cupboards bridging or cantilever supports.

EASY TO CLEAN

- One piece pressed worktop in 2 mm stainless steel with smooth, rounded corners.
- Exterior panels in stainless steel with Scotch Brite finish.
- Right-angled, laser cut side edges to allow for the flush-fitting of units side-by-side thus

eliminating gaps and possible dirt traps.

EASY TO USE

- The gas solid top is ideal for kitchens needing a flexible and powerful cooking top. It allows the chef to easily move pots and pans from one area of the cooking surface to another without the need for lifting.
- The cooking surface provides differentiated temperature zones with a maximum temperature in the center of 500°C and gradually decreasing to 200°C at the perimeter, thus allowing for different types cooking (fierce boiling at center – low simmering at perimeter).
- Single central burner with

optimized combustion (maximum power of 10,5 kW), flame failure device, protected pilot light and piezo ignition.

- Durable cast-iron cooking surface.
- All gas appliances are supplied for use with natural gas or LPG. Conversion jets supplied as standard.

EASY TO MAINTAIN

- The special design of the control knobs and bezels guarantees against water infiltration.

EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- CFC free packaging.



Electrolux

900XP
Gas solid top

*In accordance with CE regulations for gas models belonging to Class B11 (power over 14 kW), it is necessary to install a chimney (if installed under a hood) or chimney and draft diverter if the waste gases are vented directly outside.

	E9STGH1000 391018
TECHNICAL DATA	
Power supply	Gas
External dimensions - mm	
width	800
depth	930
height	250
Solid top area - mm	
width	800
depth	700
Control Knob	Gas cock
Solid top heat input - kW	10.5
Power - kW	
gas	10.5
Net weight - kg.	92
ACCESSORIES	
2 SIDE COVERING PANELS H=250-D=900-ELUX	216278
CHIMNEY UPSTAND 800MM	206304
DRAUGHT DIVERTER WITH 150 MM DIAMETER	206132
FLUE CONDENSER FOR 1 MODULE DIAM.150MM	206246
FRONTAL HANDRAIL 1200 MM	216049
FRONTAL HANDRAIL 1600 MM	216050
FRONTAL HANDRAIL 800 MM	216047
JUNCTION SEALING KIT	206086
LARGE HANDRAIL(PORTIONING SHELF)400 MM	216185
LARGE HANDRAIL(PORTIONING SHELF)800 MM	216186
MATCHING RING FOR FLUE CONDENSER 150DIAM	206133
PRESSURE REGULATOR FOR GAS UNITS	927225
SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE	216044
SUPPORT FOR "BRIDGE" SYSTEM 1000 MM	206138
SUPPORT FOR "BRIDGE" SYSTEM 1200 MM	206139
SUPPORT FOR "BRIDGE" SYSTEM 1400 MM	206140
SUPPORT FOR "BRIDGE" SYSTEM 1600 MM	206141
SUPPORT FOR "BRIDGE" SYSTEM 800 MM	206137
WATER COLUMN EXTENSION FOR 900 LINE	206290
WATER COLUMN WITH SWIVEL ARM	206289


CIGA010

2012-07-26

Subject to change without notice

900XP
Gas solid top

391018

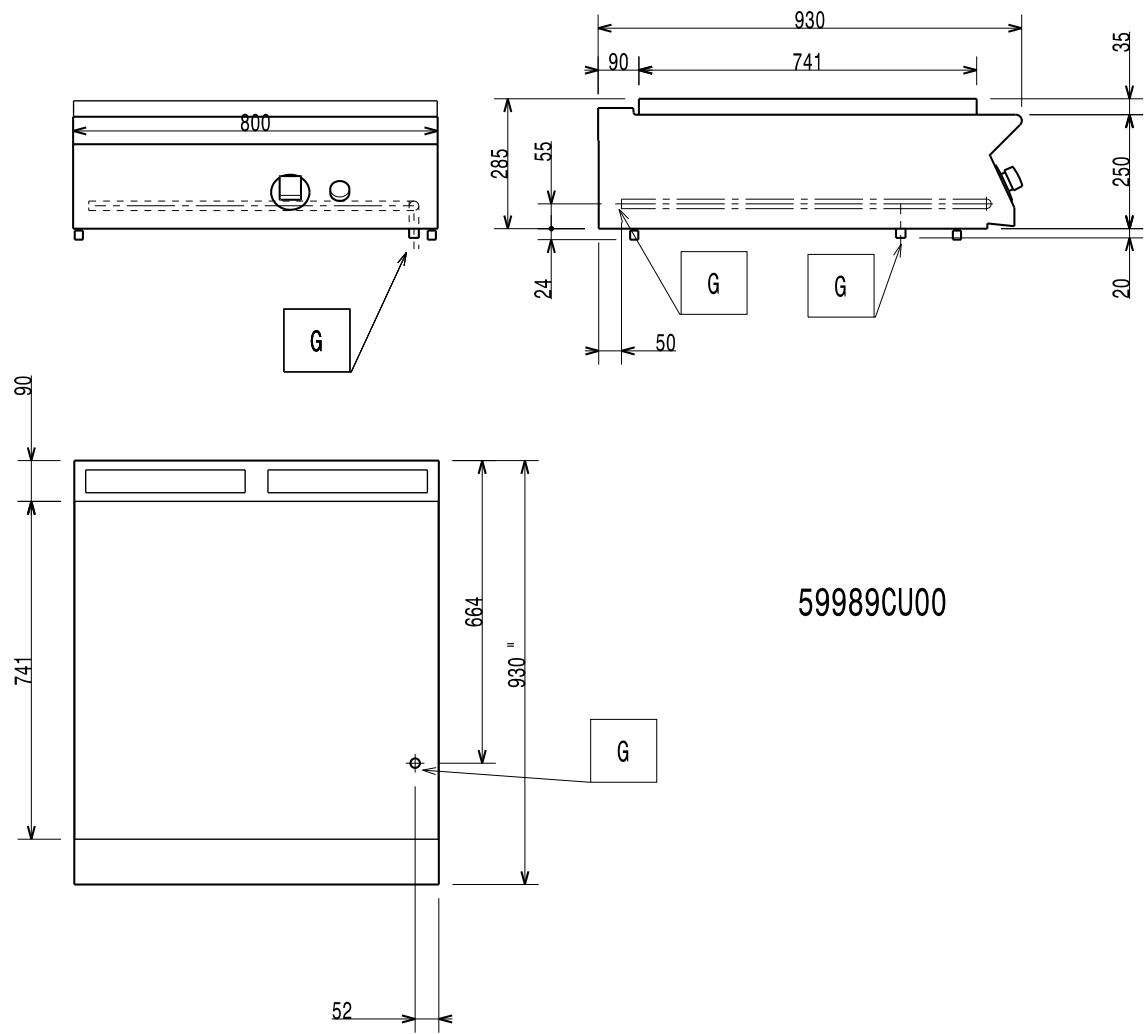

59989CU00

LEGEND

G - Gas connection

E9STGH1000
391018

1/2"

CIGA010

2012-07-26

Subject to change without notice