# Electric automatic pasta cookers

The 900XP range is designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, 900XP is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed in this sheet are electric automatic pasta cookers.



#### **EASY TO INSTALL**

- Feet in stainless steel 50 mm adjustables in height.
- All models provided with service duct to facilitate installation.

### **EASY TO CLEAN**

- Load bearing frame in stainless
- Exterior panels in stainless steel with Scotch Brite finish.
- Well in AISI 316-L stainless steel thus guaranteeing high resistence to the corrosive action of salt and water. Rounded corners.
- The special design of the control knob system guarantees against water infiltration.

#### **EASY TO USE**

- Heating via armoured stainless steel elements.
- Automatic water filling and automatic water topping up.
- Automatic refilling of the evaporated water.
- Digital timer guaranteeing precise settings of cooking parameter.
- · Elevating basket which is automatically tilted at the end of the cooking cycle by an electromechanic linear activator fed at low tension (24 V).
- Electrovalve with probe to prevent heating in the case of no water. Automatic ignition when water reaches minimum level.

- Electronic control end limit basket.
- Large drainage tap with insulated handle positioned on the front of the appliance.
- Insulated lid and handle in stainless steel fitted on hinges with counter-balancing springs.
- Simple and functional control panel provided with transparent plexiglass protection.
- Well fitted with overflow pipe to eliminate foam.
- Timer for programming cooking
- High productivity and quality due to high thermal efficiency and automatically controlled cooking







# 900XP Electric automatic pasta cookers

# **EASY TO MAINTAIN**

TECHNICAL DATA

Power - kW

auxiliary Power - kW

Net weight - kg.

Supply voltage

installed-electric

- IPX5 water protection.
- Frontal access to all working components.

# EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- CFC free packaging.

Power supply	Electric	Electric	Electric	Electric
Installation	FS on floor	FS on floor	FS on floor	FS on floor
Configuration	Free Standing	Free Standing	Free Standing	Free Standing
Capacity - It.	190	150	150	190
External dimensions - mm				
width	1200	1600	800	1200
depth	930	930	930	930
height	850	850	850	850
height adjustment	50	50	50	50
N° of wells	1	2	1	1
Usable well dimensions - mm				
width	740	625	530	740
depth	550	640	570	550
height	465	410	550	465
Number of baskets	1	2	1	2
Temperature limiter	•			•
Maximum Well Capacity -It	190	150, 150	150	190
Control Knob	Commutator; Lifting basket timer	Commutator; Lifting basket timer	Commutator; Lifting basket timer	Commutator; Lifting basket timer

E9PCEL1SF0 391130 E9PCEP2RF0 391129

0.25

30

310

400 V, 3N, 50

E9PCEH1RF0 391128

0.19

15

165

400 V, 3N, 50

CIOD010

2012-07-26

E9PCEL1SF2 391131

0.25

23

220

400 V, 3N, 50

Subject to change without notice


0.25

23


220

400 V, 3N, 50


	E9PCEL1SF0 391130	E9PCEP2RF0 391129	E9PCEH1RF0 391128	E9PCEL1SF2 391131
ACCESSORIES				
2 SIDE COVERING PANELS H=700 D=900-ELUX	216134	216134	216134	
2 SIDE KICKING STRIPS - 900 LINE	206180	206180	206180	206180
4 WHEELS (2 WITH BRAKE)	206188	206188	206188	206188
FRONTAL KICKING STRIP 1200 MM	206178			206178
FRONTAL KICKING STRIP 1600 MM		206179		
FRONTAL KICKING STRIP 800 MM			206176	
KIT HACCP EKIS				922166
PASTA COOKER TROLLEY FOR 2-GN 1/1 CONT.	921011	921011	921011	921011
PASTA COOKER TROLLEY WITH TILTING TANK	921012	921012	921012	921012
TROLLEY WITH LIFTING & REMOVABLE TANK	922403	922403	922403	922403
WATER COLUMN WITH SWIVEL ARM	206289	206289	206289	206289

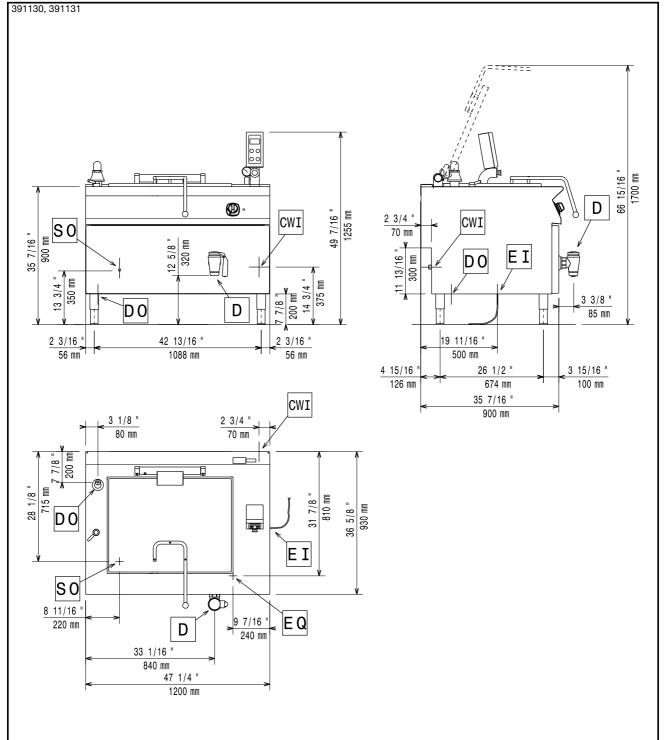

	E9PCEL1SF0 391130	E9PCEL1SF2 391131
LEGEND		
CWI - Cold water inlet	3/4"	3/4"
D - Water drain	2"	2"
El - Electrical connection	400 V, 3N, 50	400 V, 3N, 50

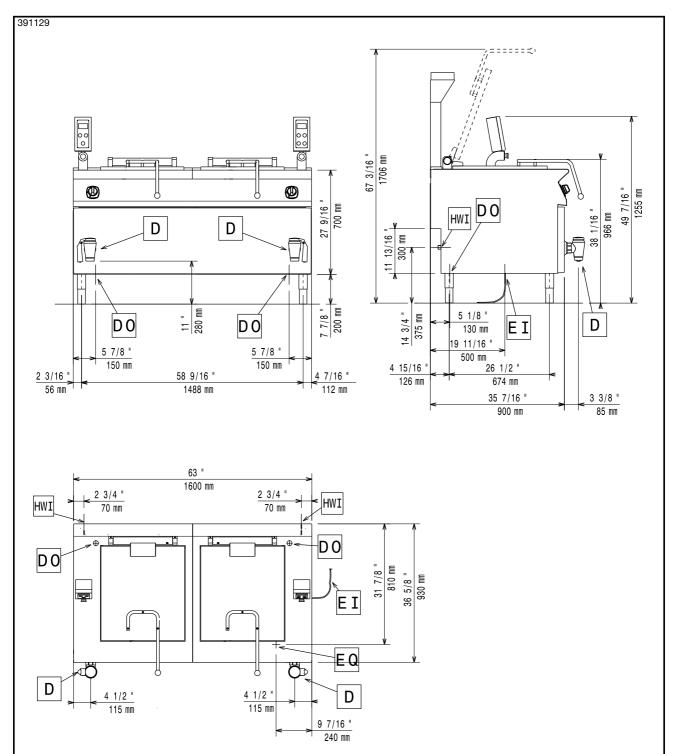

	E9PCEP2RF0 391129
LEGEND	
CWI - Cold water inlet	3/4"
D - Water drain	2"
El - Electrical connection	400 V, 3N, 50

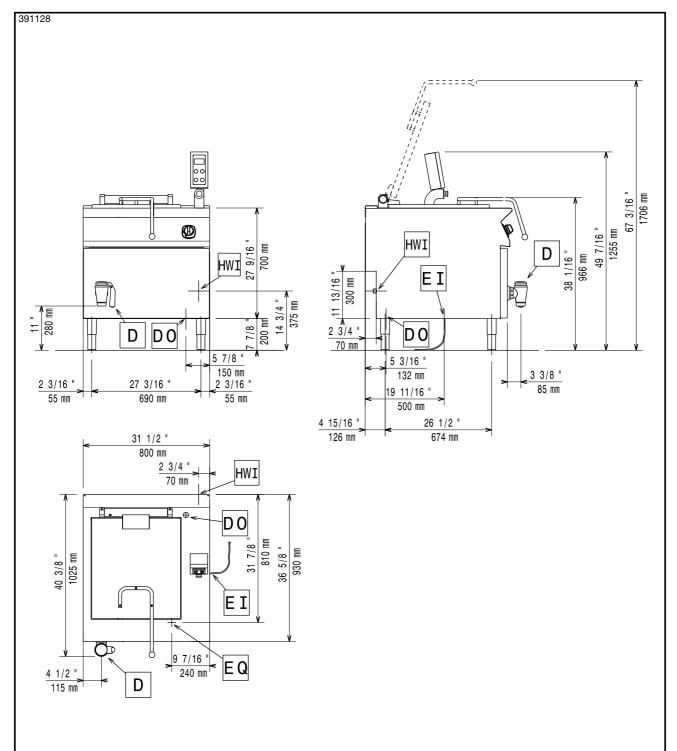

	E9PCEH1RF0 391128
LEGEND	
CWI - Cold water inlet	3/4"
D - Water drain	2"
El - Electrical connection	400 V, 3N, 50