

900XP

Automatic Basket Lifting System

The 900XP range is designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, 900XP is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The model detailed in this sheet is a 200 mm automatic lifting system that allows to maximize operations when combined with any of the 900XP Pasta Cookers.



EASY TO INSTALL

- 200 mm wide automatic basket lifting system with 3 stainless steel baskets supports to provide lifting for one 1/3 basket per lifter (baskets are optional accessories to be ordered separately).
- Unit may be placed on either side of the pasta cooker or in combination with a second automatic lifting unit on the opposite side to provide lifting for 6 single portion square baskets

EASY TO USE




- The electronic programmability and automatic lifting of the baskets make this unit a must for any kitchen wanting to standardize their cooking procedures.
- Programmability and automatic lifting function guarantee

repeatability of the cooking cycle, thus ensuring the same high quality of the food time after time due to the automation of the entire cooking process.

- Unit can be used also in "manual mode" by pushing a button to lower and raise the baskets.
- Possibility to memorize up to 9 cooking times via digital control, which can be assigned independently to the single basket support.
- Easy operation, automatic basket lifting can be activated through push button function.



Electrolux

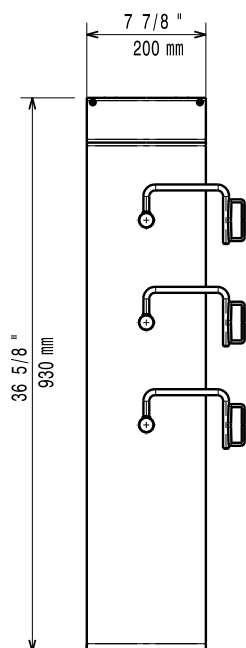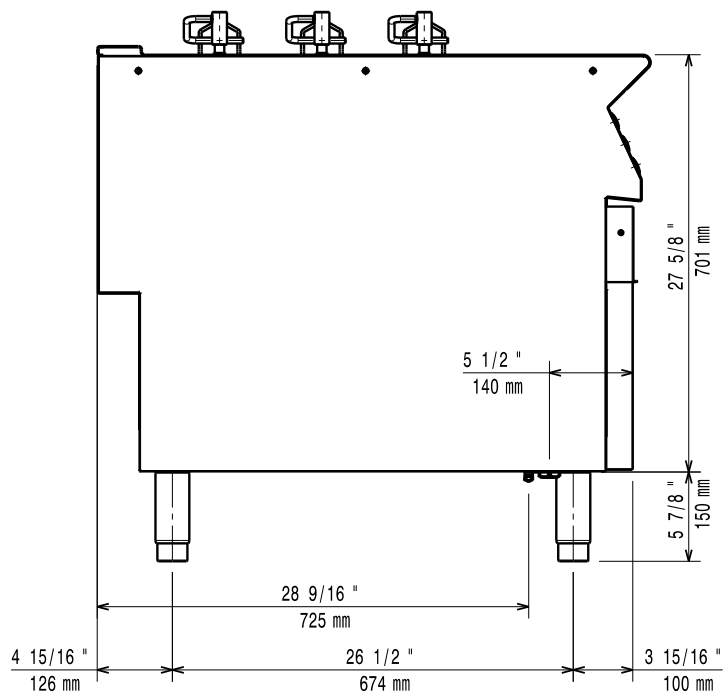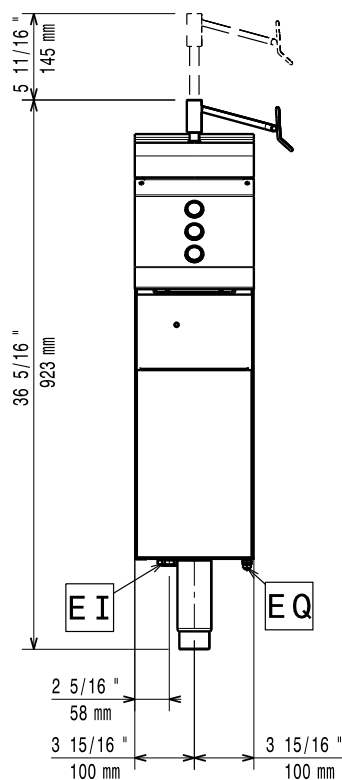

900XP

Automatic Basket Lifting System

C10010

2012-07-26

LIFT9E 206353	
LEGEND	
EI - Electrical connection	230 V, 1, 50/60
TECHNICAL DATA	
External dimensions - mm	
width	200
depth	930
height	850
Net weight - kg.	40
Supply voltage	230 V, 1, 50/60

Subject to change without notice