

900XP

Refrigerated base

The 900XP range is designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, 900XP is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The model detailed in this sheet is a refrigerated base which completes the new 900XP range and is ideal to store food products at various stages of the cooking process.



EASY TO INSTALL

- Main connections can be accessed via the base of the unit.

EASY TO CLEAN

- Exterior panels in stainless steel with Scotch Brite finish.
- Feet in stainless steel are adjustable up to 50 mm in height.

EASY TO USE

- The refrigerated base has two large stainless steel drawers on telescopic runners.
- Thermostat, defrost indicator light and ON/OFF switch.

- Internal temperature ranges from -2° to +10°C.
- Built-in compressor unit.
- Suitable for use in ambient temperatures of up to 43 °C.
- Anti-tilt runners accept GN1/1 containers.
- CFC free (ecological refrigerant type: R404a - gas in foam: cyclopentane).
- All top models (with the exception of gas and electric char-grills and lava char-grill tops) can be easily mounted on the refrigerated or freezer bases.

EASY TO MAINTAIN

- IPX5 water protection.
- The special design of the control knobs and bezels guarantees against water infiltration.

EASY ON THE ENVIRONMENT

- 98% recyclable by weight.
- CFC free packaging.



Electrolux

900XP
Refrigerated base

CIQA010


	E9BAPL00R0 391163
TECHNICAL DATA	
Power supply	Electric
Control type	Mechanical
External dimensions - mm	
width	1200
depth	900
height	600
External dimensions - mm	
height adjustment	50
Min/Max internal humidity - %	75/90%
N° and type of drawers	2, 1/1+1/3 GN
N° defrost in 24 hrs.	4/10'
Refrigerant type	R404a
Refrigerant quantity - g.	400
Refrigeration power - W	410
Power - kW	
installed-electric	0.4
Net weight - kg.	114
Net Weight - lb	251
Supply voltage	230 V, 1N, 50
ACCESSORIES	
FLANGED FEET KIT	206136

2012-07-26

Subject to change without notice

900XP
Refrigerated base

391163

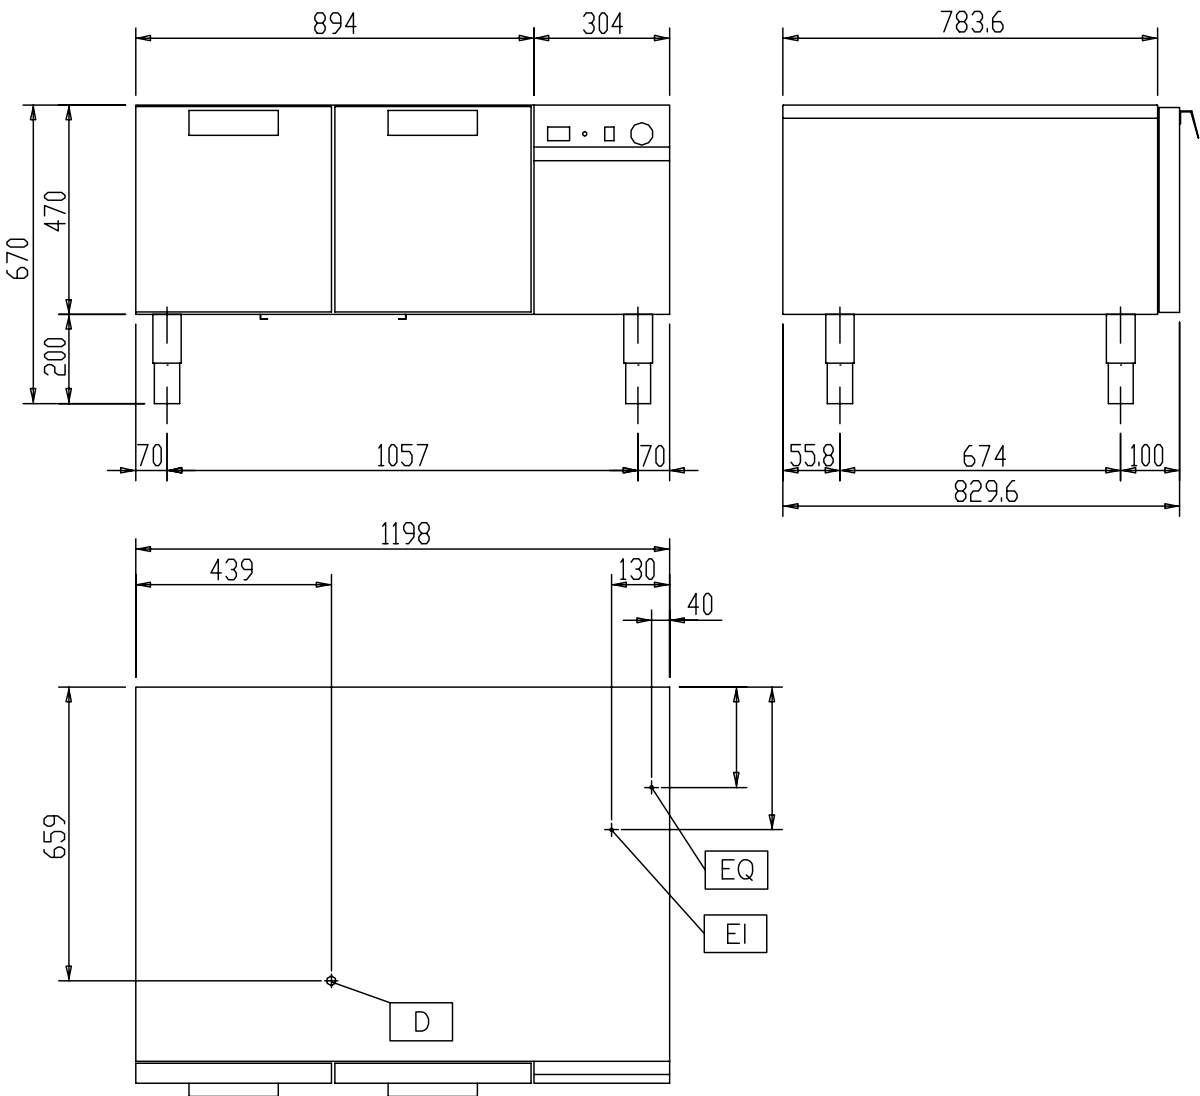

LEGEND	E9BAPL00R0
	391163
	1/2"
	230 V, 1N, 50
D - Water drain	
EI - Electrical connection	

CIQA010

2012-07-26

Subject to change without notice